



CFS FRAMING CONNECTORS



ClarkDietrich Clip Express[™] stands alone

in the industry. The vast lineup of products, quick delivery service and philosophy are unique in every respect—and especially in sum total. That's because Clip Express was created to give our customers an unmatched level of confidence.

EVERYTHING YOU NEED FROM ONE CONVENIENT SOURCE.

We know that having the right products, at the right time, and at the right price is absolutely essential to getting the job done. Clip Express is a single source for the industry's widest and most cost-effective array of rigid, deflection, bridging, and general-purpose clips, connectors, supports and framing hardware for commercial and residential cold-formed steel framing.

CONSISTENT, HIGH-QUALITY PRODUCTS.

When you design or specify by ClarkDietrich product name or number, you get fully engineered and rigorously tested systems and connectors—the same precision-formed products each and every time. It's exactly the kind of thing you'd expect from a partner like ClarkDietrich. The products we manufacture—like FastClip™ Slide Clips and Fast Top™ Clips—are created specifically to work as a system. It's an approach that leads to enhanced performance on the job.

VALUE THAT CONTRIBUTES TO YOUR BOTTOM LINE.

While you may find a cheaper price than ClarkDietrich, you won't find a lower overall cost or better value. We offer unmatched service through numerous plants and engineering offices—and nationwide product availability. From technical assistance to complete engineering services, we've truly put together an incredible array of resources to help you be successful on any project. This catalog is a great example. It's one of the most comprehensive light-gauge steel connector, clip, support and framing hardware manuals or resources available.

CONNECTIONS YOU CAN COUNT ON.

If getting what you want, when and how you want it is a must, ClarkDietrich Clip Express is ready to deliver. In fact, a wide array of shipping options is available, from standard ground to overnight. If we get your order today, you can get it tomorrow.

Count on ClarkDietrich to deliver products, systems and services that keep your costs down and productivity up.

Need help with product selection, ordering, scheduling, delivery, or anything else? Call the Clip Express sales team:

Clip Express—866-638-1908

Need Product Submittals?
Use SubmittalPro® at clarkdietrich.com.



Overview	2-11
Custom-Fabricated Specialty Products	2-3
Fastening Options	4-6
General Notes	7
How To Use This Catalog	8-9
Product Information	10
Support and Services	11
Deflection Connectors	12-43
Drift Connections	44–71
Rigid Connections	72–119
Floor Framing Connections	120-137
Bridging, Bracing and Backing	138–161
Roof and Truss Connections	162–169
Specialty Clips and Accessories	170-191
Typical Construction Details	192–193
Index	194–195
Clip Express™ Display Program	196
Trademarks and Warranty	196
Code Approvals	197
Locations	197

TABLE OF CONTENTS

Custom-Fabricated Specialty Products

When the job calls for a connection, clip or support that doesn't exist in this catalog, ClarkDietrich can create whatever you need. We can custom fabricate just about any shape, bend, angle or specialty framing clip, connector or support to your exact specification. Manufactured using precision cutting and forming equipment, a diverse selection of specialized sizes and shapes is available—including prepunched holes and/or specialized slots. Simply submit your dimensioned drawings to your ClarkDietrich representative, and we'll do the rest!

Note: The performance and installation of custom-made products is the sole responsibility of the design professional and engineer of record. Any customer ordering a custom-fabricated clip, connector or support shall indemnify, defend and hold harmless ClarkDietrich and ClarkDietrich Engineering Services for any loss or damage arising in whole or in part.















MATERIAL SPECIFICATIONS

Gauge: 20 gauge (33mils)

Design Thickness: 0.0346 inches

Gauge: 18 gauge (43mils)

Design Thickness: 0.0451 inches

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Gauge: 12 gauge (97mils)

Design Thickness: 0.1017 inches

Gauge: 10 gauge (118mils)

Design Thickness: 0.1242 inches

Coating: CP90 or CP60

Must be specified at the time of order placement.

Yield Strength: 50ksi or 33ksi

Must be specified at the time of order placement.

ASTM: A653/A653M, C955

AISI: S240

INSTALLATION

Will vary based upon application. Consult the engineer of record.









Fastening Options

Connections can be made using a variety of fastening options. It is critical to specify the proper fastener to ensure the proper performance of the connections in light-gauge (cold-formed) steel construction.

The most common and widely used connection methods are screw connections, powder-actuated fastener connections and weld connections. Each type of connection method has various advantages and disadvantages. Therefore, we provide data for the most common types so you can choose your preferred connection method.

SCREW CONNECTIONS

Self-drilling screws—These high-strength fasteners are used if the connection is multiple thicknesses of 33mils steel or thicker. One of the more common self-drilling screws is a #10-16 x 5/8 HWH SD (#10 diameter shaft, 16 threads per inch, 5/8 length, hex washer head self-drilling screw).



AICI	C-1	1_1_1 \	II L I -	1 1- 1	C C	ew Connection	
AIDI	Calcu	llated A	llowable	Loadsi	or ocr	ew Connectio	on.

Material Design	esign Material Strength		#8-18 H\	VH Screw	#10-16 H	WH Screw	#12-14 H\	NH Screw	1/4"-14 H	WH Screw	
thickness	Design thickness	Material	Strength	Dia. = 0.160		Dia. = 0.190		Dia. = 0.210		Dia. = 0.240	
(mils)	(in)	Fy (ksi)	Fu (ksi)	Shear (Ibs)	Tension (lbs)	Shear (lbs)	Tension (lbs)	Shear (Ibs)	Tension (lbs)	Shear (lbs)	Tension (lbs)
33	0.0346	33	45	162	71	177	84	186	93	199	106
43	0.0451	33	45	241	92	263	109	277	121	296	138
F 4	0.0566	33	45	333	115	370	137	389	152	416	173
54	0.0566	50	65	333	167	467	198	562	219	600	250
	0.0713	33	45	_	_	467	173	550	191	588	218
68	0.0713	50	65	_	_	467	249	667	276	849	315
07	0.1017	33	45	_	_	467	246	667	272	867	311
97	0.1017	50	65	_	_	467	356	667	393	867	450
440	0.1242	33	45	_	_	_	_	667	333	867	380
118	0.1242	50	65	_	_	_	_	667	480	867	549

AISI Calculated Allowable Bearing & Pullover for Screws

				#8-18 Screw		#10-16 Screw		#12-14 Screw		1/4"-14 Screw		
Material	Design	Material	Strength	Shank	Shank = 0.160		Shank = 0.190		Shank = 0.210		Shank = 0.240	
thickness	thickness		Ŭ	Head = 0.250		Head = 0.375		Head = 0.375		Head = 0.500		
(mils)	(in)	Fy (ksi)	Fu (ksi)	Bearing (lbs)	Pullover (lbs)	Bearing (lbs)	Pullover (lbs)	Bearing (lbs)	Pullover (lbs)	Bearing (lbs)	Pullover (lbs)	
33	0.0346	33	45	224	195	266	292	294	292	336	389	
43	0.0451	33	45	292	254	347	381	384	381	438	507	
54	F.4. 0.0F.((33	45	367	318	436	478	481	478	550	637	
54	0.0566	50	65	530	460	629	690	695	690	795	920	
68	0.0713	33	45	_	_	549	602	606	602	693	802	
00	0.0715	50	65	_	_	792	869	876	869	1001	1159	
97	0.1017	33	45	_	_	783	858	865	858	989	1144	
97	0.1017	50	65	_	_	1130	1239	1249	1239	1428	1653	
118	0.1242	33	45	_	_	_	_	1056	1048	1207	1397	
110	0.1242	50	65	_	_	_	_	1526	1514	1744	2018	

Notes:

- 1 All values were calculated using the 2001 AISI Specification w/2004 supplement.
- 2 Charts are based on Buildex TEK2 HWH screw capacities. All screws must meet minimum criteria outlined.
- 3 Shear strength for #8, #10, #12, and 1/4" screws must be greater than or equal to 1000 lbs, 1400 lbs, 2000 lbs and 2600 lbs respectively.
- 4 Tension strength for #8, #10, #12, and 1/4" screws must be greater than or equal to 1545 lbs, 1936 lbs, 2778 lbs and 4060 lbs respectively.
- 5 The minimum head diameter for #8 screws is 1/4." The minimum head diameter for #10 and #12 screws is 3/8." The minimum head diameter for 1/4." screws is 1/2."
- 6 Screw ultimate shear capacity is based on Buildex® DATA as a minimum.
- 7 Buildex is a registered trademark of Illinois Tool Works, Inc.

Proprietary deflection screws—Many of the

ClarkDietrich deflection clips include our Proprietary Deflection Screw that has been specifically designed to provide friction-free deflection. These fasteners eliminate drag, binding or resistance that can often occur with common fasteners.





Proprietary Deflection Screw & Proprietary HD Deflection Screw

Average Ultimate Shear 2400 lbs

AISI S100 Factor of Safety (ASD) 3.0

Average Allowable Shear Load 800 lbs

POWDER-ACTUATED FASTENERS


Powder-actuated, or low-velocity driven fasteners, are commonly used to attach cold-formed steel framing members to concrete or structural steel supports. PAF pins are used for permanent attachments and are the most common type used for cold-formed construction.




Powder-Actuated Fasteners Allowable Loads							IN NORMAL WEIGHT CONCRETE (LBS)								
Material	Yield	Bearing	Pullover		PAF (Shank Dia.=0.145", Head Dia.=0.3") Min. Embedment 3/4"				PAF (Shank Dia.=0.145", Head Dia.=0.3") Min. Embedment 1"						
thickness (mils)	strength Fy (ksi)	(lbs)	(lbs)	200	00psi	300)Opsi	400	00psi	200)Opsi	300	Opsi .	400)Opsi
(mils)	ry (KSI)			Shear	Tension	Shear	Tension	Shear	Tension	Shear	Tension	Shear	Tension	Shear	Tension
33	33	203	234	95	70	110	90	125	110	140	90	160	120	185	155
43	33	265	304	95	70	110	90	125	110	140	90	160	120	185	155
54	33	333	382	95	70	110	90	125	110	140	90	160	120	185	155
54	50	480	552	95	70	110	90	125	110	140	90	160	120	185	155
68	33	418	481	95	70	110	90	125	110	140	90	160	120	185	155
00	50	604	695	95	70	110	90	125	110	140	90	160	120	185	155
97	33	597	686	95	70	110	90	125	110	140	90	160	120	185	155
9/	50	863	992	95	70	110	90	125	110	140	90	160	120	185	155
118	33	729	838	95	70	110	90	125	110	140	90	160	120	185	155
118	50	1054	1211	95	70	110	90	125	110	140	90	160	120	185	155

Powder-Actuated Fasteners Allowable Loads IN STRUCTURAL STEEL (LBS) PAF (Shank Dia.=0.145", Head Dia.=0.3") Material Yield thickness (mils) strength Fy (ksi) Pullover (lbs) 3/4 Bearing (lbs) Shear Tension Shear Shear Shear Shear Tension Tension Tension Tension

- 1 Bearing and pullover values were calculated using the 2001 AISI Specification w/2004 supplement.
- 2 See General Note #6 on page 9 for additional information.





Fastening Options

WELDED CONNECTIONS

Fillet welds—Used to make lap joints, corner joints and T-joint connections. Weld metal is deposited in a corner formed by the fit-up of the two members and penetrates and fuses with the base metal to form the joint.

Flare welds—Used to join rounded or curved pieces.

- A Flare Bevel groove weld is commonly used to join a rounded or curved piece to a flat piece.
- A Flare V groove weld is commonly used to join two rounded or curved parts.

Note: For graphical clarity, the weld illustrations do not show the penetration of the welded material. Weld penetration is critical in determining the quality of the weld.



AISI.	Allowable	Loads for	Welded	Connections

Material	Design	Material	Strength	Fillet	Weld	Flare Gro	ove Weld
thickness	thickness	Fy	Fu	Longitudinal	Transverse	Longitudinal	Transverse
(mils)	(in)	(ksi)	(ksi)	(lbs)	(lbs)	(lbs)	(lbs)
				e one (1) inch we			
43	0.0451	33	45	619	864	544	663
45	0.0451	50	65	895	1247	785	958
54	0.0566	33	45	822	1084	682	832
J4	0.0566	50	65	1188	1566	985	1202
68	0.0713	33	45	1082	1365	859	1048
06	0.0713	50	65	1563	1972	1241	1514
97	0.1017	33	45	1480	1480	1226	1480
77	0.1017	50	65	1480	1480	1480	1480
118	0.1242	33	45	1808	1808	1497	1808
110	0.1242	50	65	1808	1808	1808	1808
		V	alues for a single	e two (2) inch we	ld		
43	0.0451	33	45	998	1727	1087	1326
45	0.0451	50	65	1442	2495	1570	1915
54	0.0566	33	45	1253	2168	1364	1664
54	0.0566	50	65	1809	3131	1971	2404
68	0.0713	33	45	1578	2731	1719	2096
00	0.0713	50	65	2279	3944	2483	3028
97	0.1017	33	45	2884	2961	2452	2961
97	0.1017	50	65	2961	2961	2961	2961
118	0.1242	33	45	3616	3616	2994	3616
110	0.1242	50	65	3616	3616	3616	3616
		Va	lues for a single	three (3) inch w	eld		
43	0.0451	33	45	1497	2591	1631	1989
45	0.0451	50	65	2163	3742	2356	2873
54	0.0566	33	45	1879	3251	2047	2496
54	0.0566	50	65	2714	4697	2956	3605
68	0.0713	33	45	2367	4096	2578	3144
00	0.0713	50	65	3419	5916	3724	4542
07	0.1017	33	45	3376	4441	3678	4441
97	0.1017	50	65	4441	4441	4441	4441
110	0.1242	33	45	4987	5424	4491	5424
118	0.1242	50	65	5424	5424	5424	5424

- 1 All values were calculated using the 2001 AISI Specification w/2004 supplement (Section E2).
- **2** Fxx values were based off of Fxx >= 70ksi and that Fxx > Fu.
- 3 Values include a factor of safety that varies depending on the AISI code calculation used.
- 4 Longer weld values can be found by following the AISI Specification or by calling Technical Services at 888-437-3244; however, using multiples of lengths shown for longer welds may result in incorrect values.
- 5 Weld values listed are based on a minimum effective throat of .707 times the design thickness.

General Notes

- Install products per installation instructions detailed in this catalog.
- 2 Install all connectors and fasteners before load application.
- 3 Do not modify, change or alter any connector in this catalog.
- 4 Do not bend connectors unless they are specifically designed to be bent. Connectors that are not designed to be bent may fracture. Fractured steel will not carry load and must be replaced. Connectors that are designed to be bent shall only be bent one time.
- 5 Install fasteners per the manufacturer's instructions.
- 6 Load tables have been developed using the following fastener data:
 - Powder-Actuated Fastener
 (PAF)-Minimum shank diameter
 of 0.145" with a minimum head
 diameter of 0.300" placed in 3/16"
 steel minimum. All PAF pins must
 have a 5.0 safety factor and an
 allowable capacity greater than the
 values shown in the allowable load
 charts herein, either as a single pin
 or in multiples per each chart.
 - Design capacities of PAF fasteners used with light gauge steel connectors must comply with the provision of AISI S100 (2016) Section J5 Power-Actuated (PAF) Connections, as well as the PAF manufacture's design guidelines.
 - Hilti* Kwik-Con II-Reference 2011
 Edition of the Hilti North American
 Product Technical Guide, Volume 2,
 page 340.

- #10-16 Screws—Capacities as calculated according to the AISI North American Specification for the Design of Cold-Formed Steel Members. The ultimate nominal screw shear capacity must be 1400# or greater.
- For additional allowable load tables and fastener options, please visit clarkdietrich.com.
- 7 Tabular footnotes must be followed and supercede general notes when in conflict.
- 8 Fasteners other than those specified may be substituted with the approval of the engineer of record.
- 9 Allowable loads and material data listed in this catalog supersedes all information in previous publications.
- 10 Allowable loads, in some cases, have been increased by one-third per allowable codes. It is important to verify that the actual installation meets the requirements to allow the one-third increase. If not, the engineer of record should adjust the loads down.
- 11 Listed loads are the maximum monotonic design loads to be applied to the connection based on testing or calculations. Load tables have been developed using Allowable Stress Design methodologies.

- 12 Allowable loads are the maximum forces applied in one direction only. When loads are applied in multiple directions, the engineer of record is responsible for verifying the maximum capabilities based on an appropriate interaction equation.
- 13 Where maximum movements (deflections) are specified, they are the total movement in both directions. The fastener positioning and size will affect the amount of allowable movement.
- recommends the following language be included in plans and specifications:
 "ClarkDietrich connectors were utilized in developing the plans and specifications for this project. Before substituting another brand, the engineer of record must verify the load capacities and approve the substitution in writing."

*Hilti is a registered trademark of the Hilti Aktiengeseilschaft Corporation.


WARNING: Handling of these products without the proper use of hand and eye protection may result in injury.

How To Use This Catalog

This catalog is designed to help you select the right product or system for your construction applications. It is divided into seven major sections, with each one featuring a detailed building cutaway showcasing the products included in that section:

- · Deflection Clips and Connections
- Drift Connections
- Rigid Connections
- Floor Framing Clips, Stiffeners, Supports and Hangers
- · Bridging, Bracing and Backing Systems
- Roof and Truss Connections
- Specialty Clips and Fasteners

Example: Detailed building cutaway.

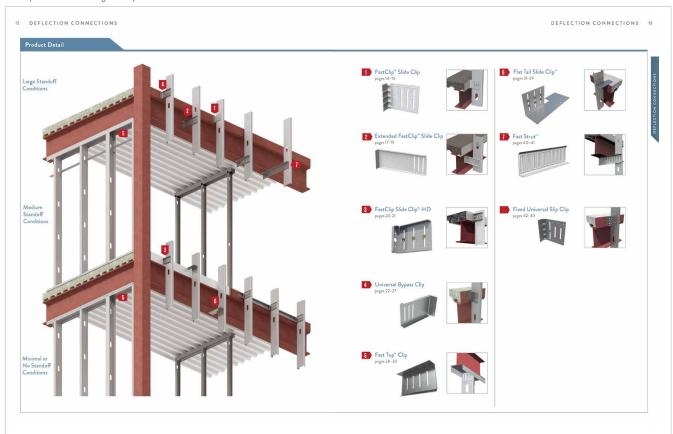


COMPREHENSIVE INDEX

At the back of the catalog, you'll find a quick reference index to our complete product offering. This index includes common names and product names, as well as common acronyms, to help you quickly find exactly what you're looking for.

PRODUCT PAGES

Each product page includes: an extensive product overview, features and benefits, detailed fastening instructions and patterns, in addition to the information shown below.

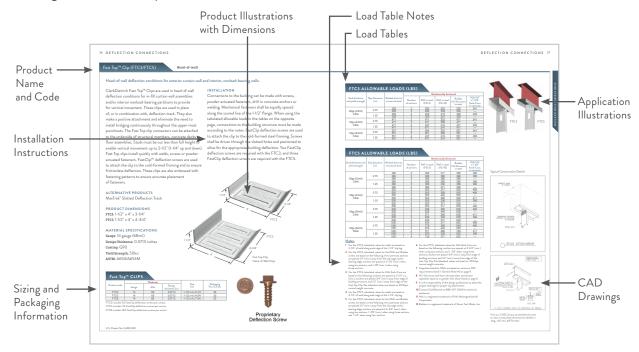

NOT ALL LOAD TABLES ARE CREATED EQUAL

It is critical that the allowable load tables for clips, connectors and fasteners are interpreted correctly—especially when comparing clip performance for a "ClarkDietrich or equal" specification. The allowable load for a clip assembly is governed by the capacity of the clip, plus the method of attachment to the structure. The ClarkDietrich tables include the attachment to the structure and not simply the clip capacity alone. When attaching a clip to the structure, the overall capacity can often be lower than the published value for the clip alone. Load tables that ignore the attachment to the structure essentially *imply that the clip or connector must be welded* to achieve the stated values. More often than not, clips and connectors will not be welded, based on installation quality and efficiency.

That's why ClarkDietrich publishes values for the most common attachment methods—so the designer or engineer can have confidence that all load requirements have been satisfied. For example, the tabulated values ClarkDietrich provides for the FastClip™ includes data for commonly used PAFs and Buildex* screws.

Example: ClarkDietrich allowable load table.

Anchor type	Stud thickness and yield strength	No. anchors to structure	Allowable load (lbs)
		2	425
	20ga (33mils) 33ksi	3	425
. <u>e</u>		4	425
		2	852
G-a	18ga (43mils) 33ksi	3	852
Sel		4	852
5.5		2	852
7e1	16ga (54mils) 50ksi	3	852
Buildex#12-24 Tek 5 Self-Drilling Screws to 3/16" Steel	- '	4	852
12- ew		2	852
₩ ö	14ga (68mils) 50ksi	3	852
g		4	852
. <u>a</u>		2	852
_	12ga (97mils) 50ksi	3	852
		4	852
		2	511
	20ga (33mils) 33ksi	3	587
		4	587
		2	511
*	18ga (43mils) 33ksi	3	767
te		4	852
.0		2	852
PAF to 3/16" Steel*	16ga (54mils) 50ksi	3	852
\$		4	852
Η		2	852
2	14ga (68mils) 50ksi	3	852
		4	852
		2	852
	12ga (97mils) 50ksi	3	852
		4	852

^{*}Buildex is a registered trademark of Illinois Tool Works, Inc.

Product Information

PRODUCT LABELING

The majority of the connectors listed in this catalog are identified using a very simple alphanumeric product code system. Each clip, connector or support is clearly embossed with an identifiable code so the installer can easily identify and use the proper connection hardware. For the engineer or architect, the embossed markings provide a very easy way to field verify that the correct connector or hanger is used.

PACKAGING

The majority of clips are packaged in distinct, easy-to-spot, blue buckets. Each bucket is clearly labeled with the product code, gauge, size, length, dimensions, piece counts, and any special markings as requested. Based on order quantity, buckets will be packed in skids for easy handling. Each skid will be clearly identified with master skid labels that display the same information as the buckets.



PROTECTIVE COATINGS

Coating designations for the clip and connector products in this catalog are displayed in the material specification section for each product. Special coatings are available on request. For more information, please contact your sales representative.

STEEL THICKNESS

The steel thickness of a connector, clip, support or hanger is referenced in terms of gauge or mils. The mils thickness measures the uncoated base metal material, and is a key contributor to the strength of the product.

Note: All products comply with ASTM and AISI standards and federal specifications as shown in the Code Approvals and Performance Standards in the back of this catalog. Minimum thickness is 95% of the design thickness, per AISI code. One mils is equivalent to $1/1000 \ (0.001)$ of an inch. So, a 20 gauge stud measuring the minimum uncoated base metal at 0.030 inches is 30 mils thick.

Steel Thickness									
Gauge	Mils	Design thickness	Minimum thickness						
25	18	0.0188"	0.0179"						
20 DW	30	0.0312"	0.0296"						
20 STR	33	0.0346"	0.0329"						
18	43	0.0451"	0.0428"						
16	54	0.0566"	0.0538"						
14	68	0.0713"	0.0677"						
12	97	0.1017"	0.0966"						
10	118	0.1242"	0.1180"						

YIELD STRENGTH (FY/PSI OR KSI)

The majority of clips, connectors, supports and framing hardware are manufactured from mil-certified, ASTM A1003 Structural Grade 50 Type H steel. KSI = kips/square inch = 1,000 lbs

METRIC SPECIFICATIONS

At your request, ClarkDietrich will provide "soft" metric conversions on its products and systems to help specifiers match metric design sizes. In addition, some products are available with hard metric dimensions from selected manufacturing facilities.

Support and Services

CLARKDIETRICH ENGINEERING SERVICES

Smarter engineering and technical expertise. It's support that extends beyond the structure itself.

From the initial design phase to jobsite installation, we are all about providing inventive, yet practical and hands-on know-how to help you think outside the box—or to help you just get it done.

ClarkDietrich Engineering Services is a full-service consulting firm that believes strongly in value engineering and customer input. Our engineering fees and lead times are competitive, and our customer service exceeds the industry standard with consistent point-of-contact through our regional project managers.

We offer Building Information Modeling (BIM) services that include specialty engineering collaborative design. We support the BIM movement by offering add-on tools that allow our products, and the rich data attached to them, to quickly be imported into digital designs. Our team is also comprised of LEED®-accredited professionals to consult on sustainable building design.

- Electronically sealed shop drawings and calculations
- · Preliminary sizing and pre-bid engineering pricing
- · Reference plan on large projects
- Detailed wall sections, full elevation opening design and C-stud truss design

Our technical services team provides immediate response to questions ranging from general installation to detailed specification requirements, and can deliver one-day turnaround on technical sizing. We are experts on industry standards such as AISI, ASTM and SFIA. Our team also supports our online product submittal system, SubmittalPro, and our design/engineering software is available as a free download from www.clarkdietrich.com.

- · Product support and typical member sizing
- Framing detail recommendations
- Compliance and industry standards, such as AISI, ASTM and SFIA
- Engineering software and product submittal support
- LEED requirements support





ClarkDietrich Engineering Services


Toll-Free Phone: 877.832.3206
Toll-Free Fax: 877.832.3208
Technical Services: 888.437.3244
Email: engineering@clarkdietrich.com

CENTRAL Crown Point, IN
NORTHEAST Bristol, CT

SOUTHEAST McDonough, GA

WEST Carlsbad, CA

Product Detail

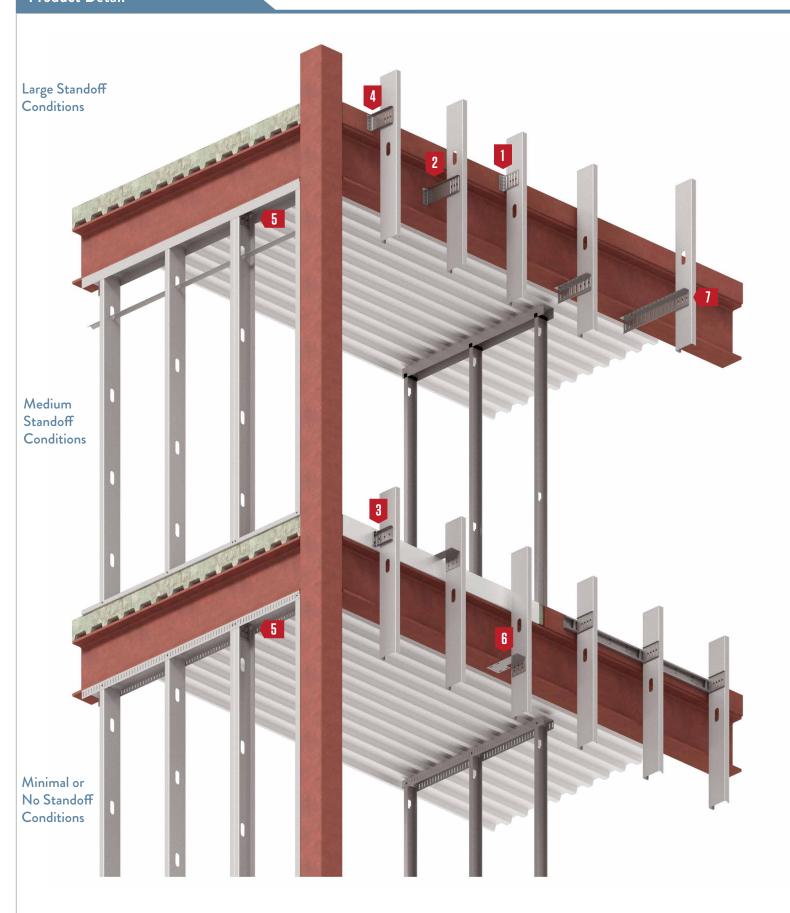

FastClip™ Slide Clip
pages 14–16





6 Flat Tail Slide Clip™ pages 31-39





2 Extended FastClip™ Slide Clip
pages 17-19





7 Fast Strut[™] pages 40–41





FastClip Slide Clip™-HD
pages 20-21





Fixed Universal Slip Clip pages 42-43





4 Universal Bypass Clip





Fast Top™ Clip
pages 28–30





FastClip™ Slide Clip

Curtain Wall/Bypass

Vertical building movement up to 3."

Clark Dietrich FCSC deflection clips are used to attach exterior curtain wall studs to the building structure and provide for vertical building movement independent of the cold-formed steel framing.

A Clark Dietrich Fast Clip™ deflection clip installs quickly with screws or powder-actuated fasteners, and provides adjustable standoff to ensure a plumb wall plane. Proprietary Deflection Screws are provided with each clip to ensure friction-free sliding. Each clip is also embossed with fastening patterns to ensure accurate placement of fasteners.

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Gauge: 12 gauge (97mils)

Design Thickness: 0.1017 inches

Coating: G90

Yield Strength: 50ksi ASTM: A653/A653M

PRODUCT DIMENSIONS

3-1/2" FastClip: 1-1/2" x 3-1/2" x 4-1/2" 5-1/2" FastClip: 1-1/2" x 5-1/2" x 4-1/2"


ALTERNATIVE PRODUCTS


Fast Strut™
Flat Tail™
FastClip™ HD
Universal Bypass Clip

INSTALLATION

Connections to the building can be made with screws, powder-actuated fasteners or drill-in concrete anchors. Mechanical fasteners shall be located on the embossed marks given on the scored line of the 1-1/2" flange. Two or three Proprietary Deflection Screws (based upon clip size) are used to attach the clip to the cold-formed steel framing. Screws shall be driven through the slotted holes and positioned to allow for the appropriate building deflection.







FastClip™ Slide Clips (FCSC)									
Product Code	Produ	ct Thickness	Size	Packaging					
	Mils (Gauge)	Design Thickness (in)	(in)	Pcs./Carton					
FCSC3.5-68	68mils (14ga)	0.0713	1-1/2 x 3-1/2 x 4-1/2	25					
FCSC5.5-68	68mils (14ga)	0.0713	1-1/2 x 5-1/2 x 4-1/2	25					
FCSC5.5-97	97mils (12ga)	0.1017	1-1/2 x 5-1/2 x 4-1/2	25					

3-1/2" FCSC includes 55 Proprietary Deflection Screws per carton.

5-1/2" FCSC includes 80 Proprietary Deflection Screws for 14ga clip and 80 Proprietary HD Deflection Screw for 12ga clip per carton.

Intertek CCRR-0208 U.S. Patent No. 6,688,069





Location Options with (2) Anchors





Location Options with (3) Anchors



(4) Anchors





Location Options with (2) Anchors







(4) Anchors

Location Options with (3) Anchors

3-1/2" FastClip™ Allowable Loads (lbs)

Anchor Type	Stud Thickness / Yield Strength	No. Anchors to Structure	Allowable Load (Ibs)
		2	425
	33mils (20ga) 33ksi	3	425
00		4	425
Buildex#12-24 Tek 5 Self-Drilling Screws to 3/16" Steel		2	852
۾ ٿ	43mils (18ga) 33ksi	3	852
Ste		4	852
16"		2	852
Tet	54mils (16ga) 50ksi	3	852
-24 vs t		4	852
#12 crev		2	852
S S	68mils (14ga) 50ksi	3	852
l j		4	852
		2	852
	97mils (12ga) 50ksi	3	852
		4	852
		2	511
	20ga (33mils) 33ksi	3	587
		4	587
		2	511
*	43mils (18ga) 33ksi	3	767
tee		4	852
PAF to 3/16" Steel*		2	852
3/16	54mils (16ga) 50ksi	3	852
\$		4	852
Ą		2	852
	68mils (14ga) 50ksi	3	852
		4	852
		2	852
	97mils (12ga) 50ksi	3	852
		4	852

5-1/2" FastClip™ Allowable Loads (lbs)

Anchor Type	Stud Thickness / Yield Strength	No. Anchors to Structure	Allowable Load (Ibs)		
		2	689		
Buildex #12-24 Tek 5 Self-Drilling Screws to 3/16" Steel	33mils (20ga) 33ksi	3	689		
		to Structure 2 689 3 689 4 689 4 689 2 852 3 852 4 852 4 852 2 852 3 852 4 852 4 852 2 852 3 852 4 852 4 852 5 852 6 852 6 852 6 852 6 852			
		2	852		
	43mils (18ga) 33ksi	3	852		
		4	852		
		2	852		
Tek	54mils (16ga) 50ksi	to Structure Allowable Load (lbs) 2 689 3 689 4 689 2 852 3 852 4 852 2 852 3 852 4 852 2 852 3 852 4 852 2 510 3 689 4 689 2 510 3 765 4 852 2 852 3 852 4 852 2 852 3 852 4 852 2 852 3 852 4 852 2 852 3 852			
-24 vs to		4	852		
#12.		2	852		
Š	68mils (14ga) 50ksi	3	852		
ij	Ping	4	852		
Δ -		2	852		
	97mils (12ga) 50ksi	3	852		
		4	852		
		2	510		
	33mils (20ga) 33ksi	3	689		
		4	689		
		2	510		
	43mils (18ga) 33ksi	3	765		
e e		4	852		
Š		2	852		
3/16	54mils (16ga) 50ksi	3	852		
\$		4	852		
PAF to 3/16" Steel*		2	852		
	68mils (14ga) 50ksi	3	852		
		4	852		
		2	852		
	97mils (12ga) 50ksi	3	852		
		4	852		

 $^{^*}$ See General Note #6 on page 7 for the definition of PAF, minimum requirements and other additional information.

- 1 The 1/3 stress increase for wind shall not be used.
- 2 Attach building anchors to the structure according to the manufacturer's instructions. Anchors shall be installed through the embossments on the scored line of the clip as shown on the drawings above. In no case shall anchors be installed more than 3/4" from the bend on the short leg of the clip. In cases of discrepancy between this information and the design engineer's details, the design engineer's details shall be followed.
- 3 It is the responsibility of the design professional to detail the project drawings for proper clip installation.
- **4** For connections to concrete, or other technical assistance, contact Clark Dietrich at 888-437-3244.
- 5 Buildex is a registered trademark of Illinois Tool Works, Inc.



5-1/2" FastClip™ Slide Clip

Curtain Wall/Bypass

Anchor Type	Stud Thickness / Yield Strength	No. Anchors to Structure	Allowable Load* (lbs)	Allowable Load# (lbs)
		2	608	608
	33mils (20ga) 33ksi	3	608	608
		4	608	608
0,0	43mils (18ga) 33ksi	2	905	905
<u>≒</u> _		3	905	905
Buildex #12-24 Self-Drilling Screws to 3/16" Steel		4	905	905
Self 16"	54mils (16ga) 50ksi	2	1004	1004
24.5		3	1506	1506
12-: vs to		4	1553	1710
ex#	68mils (14ga) 50ksi	2	1004	1004
PE S		3	1506	1506
ā		4	1553	1710
	97mils (12ga) 50ksi	2	1004	1004
		3	1506	1506
		4	1553	1710
33mils (20ga) 3:		2	608	608
	33mils (20ga) 33ksi	3	608	608
-	Ü	4	608	608
ate ate		2	905	905
Ste	43mils (18ga) 33ksi	3	905	905
r-A /16'		4	905	905
w de		2	1064	1064
.E.	54mils (16ga) 50ksi	3	1553	1596
X-'-C		4	1553	1710
Hilti 0.157" X. U Powder-Actuated Fasteners (PAF) to 3/16" Steel		2	1064	1064
0.15 iten	68mils (14ga) 50ksi	3	1553	1596
. <u>=</u> :	-	4	1553	1710
I		2	1064	1064
	97mils (12ga) 50ksi	3	1553	1596
	ū	4	1553	1710
-	33mils (20ga) 33ksi	n	608	608
ic ers Stee	43mils (18ga) 33ksi	n	905	905
Generic Fasteners 3/16" Steel	54mils (16ga) 50ksi	n	1553	1710
Ge Fas	68mils (14ga) 50ksi	n	1553	1710
_ 5	97mils (12ga) 50ksi	n	1553	1710

Notes:

Ultimate Clip Capacity

- 1 Tabulated allowable loads do not include a 1/3 stress increase for wind.
- 2 * Allowable capacity includes 1/8" service load limit.
- 3 # Allowable capacity does not include 1/8" service load limit.

33mils (20ga) 33ksi

43mils (18ga) 33ksi

54mils (16ga) 50ksi

68mils (14ga) 50ksi 97mils (12ga) 50ksi

- 4 Mechanical fasteners should be attached to the structure in accordance with the manufacturer's instructions. All fasteners were assumed to be installed at a distance of 3/4" from the bend of the structural leg.
- 5 n Number of generic mechanical fasteners required for connection to be determined by a design professional. Capacity should not exceed tabulated allowable loads.
- 6 Generic fastener capacities were calculated by considering clip-stud interaction, behavior of clip in tension and compression only. The design professional has to detail for clip and desired fastener installation.
- 7 Ultimate clip capacities were tabulated for the purpose of blast loads and they do not assume a safety factor.
- 8 Ultimate clip capacities were calculated by assuming that the structural leg of the clip fastened to 3/16" steel using (4) Buildex #12-24 fasteners or (4) Hilti X-U fasteners.
- 9 It is the responsibility of the design professional to detail the project drawings for proper clip and fastener installation.
- 10 Buildex is a registered trademark of Illinois Tool Works, Inc.
- 11 Hilti is a registered trademark of Hilti Aktiengeseilschaft Corporation.

1825

2715

5130

Extended FastClip™ Slide Clip

Curtain Wall/Bypass

Vertical building movement up to 3," and commonly used for large standoff conditions.

ClarkDietrich FCEC deflection clips are used to attach exterior curtain wall studs to the building structure and provide for vertical building movement independent of the cold-formed steel framing. The clips are available in standard lengths of 6," 8," 10" and 12" and are ideal for medium to larger standoff conditions. Extended FastClip™ deflection clips install quickly with screws, welds or powder-actuated fasteners, and provide adjustable standoff to ensure a plumb wall plane. Proprietary Deflection Screws are provided with each clip to ensure friction-free sliding.

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Coating: G90

Yield Strength: 50ksi **ASTM:** A653/A653M

PRODUCT DIMENSIONS

6" Extended FastClip: 1-7/8" x 6" x 4-3/4" 8" Extended FastClip: 1-7/8" x 8" x 4-3/4" 10" Extended FastClip: 1-7/8" x 10" x 4-3/4" 12" Extended FastClip: 1-7/8" x 12" x 4-3/4"


ALTERNATIVE PRODUCTS

Fast Strut™

Universal Bypass Clip

INSTALLATION

Connections to the building can be made with screws, welds, powder-actuated fasteners or drill-in concrete anchors. Mechanical fasteners shall be located on the embossed marks given on the scored line of the 1-7/8" flange. Three Proprietary Deflection Screws are used to attach the clip to the cold-formed steel framing. Screws shall be driven through the slotted holes and positioned to allow for the appropriate building deflection.



Extended FastClip™ Slide Clip (FCEC)

Product Code	Produc	t Thickness	Size (in)	Packaging Pcs./Bucket
Product Code	Mils (Gauge)	Design Thickness (in)	Size (in)	Pcs./Bucket
FCEC6-68	68mils (14ga)	0.0713	1-7/8 x 6 x 4-3/4	25
FCEC8-68	68mils (14ga)	0.0713	1-7/8 x 8 x 4-3/4	25
FCEC10-68	68mils (14ga)	0.0713	1-7/8 x 10 x 4-3/4	25
FCEC12-68	68mils (14ga)	0.0713	1-7/8 x 12 x 4-3/4	25
FCEC8-97	97mils (12ga)	0.1017	1-7/8 x 8 x 4-3/4	25

Includes 80 Proprietary Deflection Screws for 14ga clip and 80 Proprietary HD Deflection Screw for 12ga clip per carton.

Intertek CCRR-0208 U.S. Patent No. 6,688,069



Proprietary **Deflection Screw**

Proprietary HD Deflection Screw (10ga and 12ga Clips Only)


Extended FastClip™ Slide Clip

Curtain Wall/Bypass

Anchor Type	Stud Thickness / Yield Strength	No. Anchors to Structure	Allowable Load (lbs)
		2	689
	33mils (20ga) 33ksi	3	689
0.0		4	689
<u>=</u>		2	852
Ö -	43mils (18ga) 33ksi	3	852
Ste		4	852
Paildex #12-24 Tek 5 Self-Drilling Screws to 3/16" Steel Screws to 3/16" Steel Screws to 3/16" Steel Screws to 3/16" Steel 68mils (14ga) 50ksi 68mils (14ga) 50ksi		2	852
7e,	54mils (16ga) 50ksi	3	852
-24 vs tc	-	4	852
#12. crev		2	852
N ×	68mils (14ga) 50ksi	3	852
e	4	852	
97mils (12ga) 50ksi		2	852
	3	852	
		4	852
		2	689
	33mils (20ga) 33ksi	3	689
	Ŭ	4	689
		2	510
*	43mils (18ga) 33ksi	3	765
ee		4	852
PAF to 3/16" Steel*		2	852
3/16	54mils (16ga) 50ksi	3	852
\$		4	852
ΑF		2	852
	68mils (14ga) 50ksi	3	852
		4	852
		2	852
	97mils (12ga) 50ksi	3	852
		1	952

^{*}See General Note #6 on page 7 for the definition of PAF, minimum requirements and other additional information.

- 1 The 1/3 stress increase for wind shall not be used.
- 2 Attach building anchors to the structure according to the manufacturer's instructions. Anchors shall be installed through the embossments on the scored line of the clip as shown to the right. In no case shall anchors be installed more than 3/4" from the bend on the short leg of the clip. In cases of discrepancy between this information and the design engineer's details, the design engineer's details shall be followed.
- 3 It is the responsibility of the design professional to detail the project drawings for proper clip installation.
- **4** For connections to concrete, or other technical assistance, contact ClarkDietrich at 888-437-3244.
- 5 Buildex is a registered trademark of Illinois Tool Works, Inc.









Location Options with (3) Anchors



8" 97mils Extended FastClip™ Slide Clip

Anchor Type	Stud Thickness / Yield Strength	No. Anchors to Structure	Allowable Load* (lbs)	Allowable Load [#] (lbs)
~ @	33mils (20ga) 33ksi	(3) 1" x 1/16"	608	608
Weld (Fillet/ Flare Groove) E60XX	43mils (18ga) 33ksi	(3) 1" x 1/16"	905	905
	54mils (16ga) 50ksi	(3) 1" x 1/16"	1838	1838
	68mils (14ga) 50ksi	(3) 1" x 1/16"	2180	2180
> LL	97mils (12ga) 50ksi	(3) 1" x 1/16"	2587	2587
		2	608	608
	33mils (20ga) 33ksi	3	608	608
	SSITIIIS (20ga) SSKSI	4	608	608
ಹ		2	905	905
:	43mils (18ga) 33ksi	3	905	905
Ste.		4	905	905
Buildex #12-24 Self-Drilling Screws to 3/16" Steel		2	1004	1004
24.0	54mils (16ga) 50ksi	3	1261	1506
#12- vs to		4	1261	1838
ex ‡		2	1004	1004
Fig S	68mils (14ga) 50ksi	3	1261	1506
Δ .		4	1261	2008
97mils (12ga) 50		2	1004	1004
	97mils (12ga) 50ksi	3	1261	1506
		4	1261	2008
	33mils (20ga) 33ksi	2	608	608
		3	608	608
-0		4	608	608
late eel		2	905	905
St. St.	43mils (18ga) 33ksi	3	905	905
er-/ 3/16		4	905	905
to 3		2	1064	1064
A G	54mils (16ga) 50ksi	3	1261	1596
7 Z		4	1261	1838
57" iers		2	1064	1064
Hilti 0.157" X. U Powder-Actuated Fasteners (PAF) to 3/16" Steel	68mils (14ga) 50ksi	3	1261	1596
₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩		4	1261	2129
_		2	1064	1064
	97mils (12ga) 50ksi	3	1261	1596
		4	1261	2129
<u>-</u>	33mils (20ga) 33ksi	n	608	608
Generic Fasteners to 3/16" Steel	43mils (18ga) 33ksi	n	905	905
Generic asteners 3/16" Ste	54mils (16ga) 50ksi	n	1261	1835
ع آية بح	68mils (14ga) 50ksi	n	1261	2180
¥	97mils (12ga) 50ksi	n	1261	2587
<u>-</u>	33mils (20ga) 33ksi		18	325
Ultimate Clip Capacity	43mils (18ga) 33ksi	_	27	715
timate C Capacity	54mils (16ga) 50ksi		55	514
i <u>‡</u> Ω	68mils (14ga) 50ksi	_	65	541
_	07: - (12) = 0 :		7-	7/2

Notes:

- 1 Tabulated allowable loads do not include a 1/3 stress increase for wind.
- 2 * Allowable capacity includes 1/8" service load limit.

97mils (12ga) 50ksi

- 3 # Allowable capacity does not include 1/8" service load limit.
- $\textbf{4} \ \, \text{Allowable weld capacities were calculated by assuming 3} \times 1" \ long \ welds \ at \ the \ ends \ and \ center \ of \ the \ clip \ bend.$
- ${\bf 5} \ \ Listed \ weld \ capacities \ were \ calculated \ assuming \ an \ E60XX \ electrode.$
- 6 Mechanical fasteners should be attached to the structure in accordance with the manufacturer's instructions. All fasteners were assumed to be installed at a distance of 3/4" from the bend of the structural leg.
- 7 Generic fastener capacities were calculated by considering clip-stud interaction, behavior of clip in tension and compression only. The design professional has to detail for clip and desired fastener installation.
- 8 n Number of generic mechanical fasteners required for connection to be determined by a design professional. Capacity should not exceed tabulated allowable loads.
- 9 Ultimate clip capacities were tabulated for the purpose of blast loads and they do not assume a safety factor.
- 10 Ultimate clip capacities were calculated by assuming $3 \times 1^{\circ}$ long weld at the structural leg of the clip (clip bend) welded to $3/16^{\circ}$ steel.
- 11 It is the responsibility of the design professional to detail the project drawings for proper clip and fastener installation.
- 12 Buildex is a registered trademark of Illinois Tool Works, Inc.
- 13 Hilti is a registered trademark of Hilti Aktiengeseilschaft Corporation.

FastClip™ Slide Clip w/Anchor Holes

Vertical building movement up to 3".

ClarkDietrich FCSC-HD 68mils (14ga) is used to attach exterior curtain-wall studs to the building concrete structure and provide for vertical building movement independent of the cold-formed steel framing. Proprietary Deflection Screws are provided with each clip for attachment to the wall studs and allow for 3" vertical deflection (1-1/2" up and down) to ensure friction-free sliding. A 5/8" hole in the short leg of the clip allows for a 1/2" concrete anchor to be attached to the slab. (2) 3/8" holes allow 1/4" anchors.

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Yield Strength: 50ksi

Coating: G90

ASTM: A653/A1003


PRODUCT DIMENSIONS

FCSC-HD: 1-1/2" x 4-1/4" x 6" long

INSTALLATION

To attach the clip to the cold-formed steel framing stud, three Proprietary Deflection Screws, shall be driven through the slotted holes and positioned to allow for the appropriate building deflection.

Attachment to the structure concrete slab can be made with 1/2" bolt anchors. Anchor connection design and edge distance requirements must be approved by a design professional before installation.

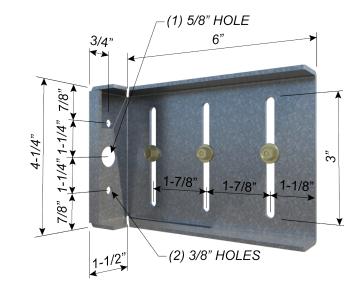

FCSC-HD	Clips			
Product Code	Product	Product Thickness		Packaging
Product Code	Mils (Gauge)	Design Thickness (in)	Size (in)	Pcs./Bucket
FCSC-HD	68mils (14ga)	0.0713	1-1/2 x 6 x 4-1/4	25



Pub. No. CD-ClipExpress 01/24

Includes (80) Proprietary Deflection Screws per carton.

FastClip™ Slide Clip w/Anchor Holes (FCSC-HD)						
	Stud Thickness			ASI	D Allowable Load	ls (lbs)
Product Code	(Mils) Gauge	Yield Strength	Anchors to Structure	F1	F2 w/ (2) screws into stud	F2 w/ (3) screws into stud
	33mils (20ga)	33ksi		50	433	650
FOCO LID	43mils (18ga)	33ksi	(1) 1/2" x 2" Hilti KWIK Bolt ³	95	592	887
FCSC-HD 68mils (14ga)	54mils (16ga)	50ksi		152	1054	1054
oomiis (14ga)	68mils (14ga)	50ksi	KVVIK BOIL	188	1107	1107
	97mils (12ga)	50ksi		188	1107	1107

- 1 Capacities listed in the table represent the capacity of the clip and the screws to the stud. Capacities listed in notes 3 are limits if the specified connector to the structure is used.
- 2 Capacities listed in the table/notes assume that no load reduction are required for spacing or edge distance of anchors.
- 3 Tension capacity is limited to 1069-lbs when using 1/2" x 2" Hilti KWIK Bolt TZ anchor into 3000psi cracked concrete.
- **4** Other anchors may be used to achieve the full clip capacity but must be designed separately.
- **5** Allowable loads have not been increased for wind, seismic, or other factors.
- **6** Hilti is a registered trademark of Hilti Aktiengeseilschaft Corporation.
- 7 It is the responsibility of the designer to properly detail connections on the contract drawings.



Universal Bypass Clip

Provides either a rigid connection or vertical building movement up to 3"

Universal Bypass Clips are used to attach exterior curtain wall studs to the building structure and provide either a rigid connection or deflecting connection for vertical building movement independent of the cold-formed steel framing.

The clips are available in standard lengths of 6", 8", 10" and 12" and are ideal for medium to larger standoff conditions. Universal Bypass Clips install quickly with screws, welds or powder-actuated fasteners, and provide adjustable standoff to ensure a plumb wall plane. For deflection application, proprietary deflection screws are provided with each clip to ensure friction-free sliding.

- Eliminates shims and scabs.
- Provides vertical movement up to 3" (1-1/2" up and 1-1/2" down) when installed as a deflection application.
- Specially designed to simplify welding installation.
- Fast, one-piece universal installation.
 No left or right handed clips.
- Proprietary Deflection Screws provide frictionless slip connections. One bag (80 screws) included.

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Gauge: 12 gauge (97mils)

Design Thickness: 0.1017 inches


Yield Strength: Structural Grade 50 Type H (ST50H), 50ksi (340 MPa)

Coating: G90 (Z275) hot-dipped galvanized coating


ASTM: A653, A1003


ALTERNATIVE PRODUCTS


FastClip[™] Slide Clip Extended FastClip[™] Slide Clip Extended Uni-Clip[™]




Mils (Gauge)	Design thickness (in)	Size (in)	Pcs/Bucket
68mils (14ga)	0.0713	1-7/8 x 6 x 4-7/8	25
68mils (14ga)	0.0713	1-7/8 x 8 x 4-7/8	25
68mils (14ga)	0.0713	1-7/8 x 10 x 4-7/8	25
68mils (14ga)	0.0713	1-7/8 x 12 x 4-7/8	25
97mils (12ga)	0.1017	1-7/8 x 6 x 4-7/8	25
97mils (12ga)	0.1017	1-7/8 x 8 x 4-7/8	25
97mils (12ga)	0.1017	1-7/8 x 10 x 4-7/8	25
97mils (12ga)	0.1017	1-7/8 x 12 x 4-7/8	25
	68mils (14ga) 68mils (14ga) 68mils (14ga) 68mils (14ga) 97mils (12ga) 97mils (12ga) 97mils (12ga)	68mils (14ga) 0.0713 68mils (14ga) 0.0713 68mils (14ga) 0.0713 68mils (14ga) 0.0713 97mils (12ga) 0.1017 97mils (12ga) 0.1017 97mils (12ga) 0.1017	68mils (14ga) 0.0713 1-7/8 x 6 x 4-7/8 68mils (14ga) 0.0713 1-7/8 x 8 x 4-7/8 68mils (14ga) 0.0713 1-7/8 x 10 x 4-7/8 68mils (14ga) 0.0713 1-7/8 x 12 x 4-7/8 97mils (12ga) 0.1017 1-7/8 x 6 x 4-7/8 97mils (12ga) 0.1017 1-7/8 x 8 x 4-7/8 97mils (12ga) 0.1017 1-7/8 x 8 x 4-7/8 97mils (12ga) 0.1017 1-7/8 x 10 x 4-7/8









INSTALLATION

Connections to the building can be made with screws, welds powder-actuated fasteners. Mechanical fasteners shall be located on the embossed marks given on the scored line of the 1-7/8" flange. Attach building anchors to the structure according to the manufacture's instructions. Anchors shall be installed through the embossments on the scored line of the clip as shown on the attached drawings. In no case shall anchors be installed more than 3/4" from the bend on the short leg of the clip. In cases of discrepancy between this information and the Design Engineer's details, the Design Engineer's details shall be followed.

For a Rigid Connection:

Attach the Universal Bypass Clip to cold-formed steel framing members using (6) #10-16 minimum self-drilling screws (not included) for the 14ga clip and (6) #12-14 minimum self-drilling screws (not included) for the 12ga clip, through the clip holes into the steel framing.

For a Deflection Connection:

Attach the Universal Bypass Clip to the cold-formed steel framing using (3) #14 Proprietary Deflection Screws (included) through the (3) slotted holes and positioned to allow for the appropriate building deflection.

Proprietary Deflection Screws:

Many of the ClarkDietrich deflection clips include our proprietary deflection fastener that has been specifically designed to provide friction-free deflection. These fasteners eliminate drag, binding or resistance that can often occur with common fasteners.






Universal Bypass Clip

UBC - 14ga (As a Deflection Connection)

ATTACHMENT TO STRUCTURAL: DESIGNED BY OTHERS

•			AllA	CHMENT TO STRUCT
	C 171:1		ASD Allowable Loads (lbs)	
Product Code	Stud Thickness / Yield Strength	F1 (In-Plane) w/ (3) #14	F2 (Tension) w/ (3) #14	F3 (Compression) w/ (3) #14
	33mils (20ga) 33ksi	110	605	605
11007 70	43mils (18ga) 33ksi	140	905	905
UBC6-68	54mils (16ga) 50ksi	255	1280	1430
68mils (14ga)	68mils (14ga) 50ksi	255	1280	1430
	97mils (12ga) 50ksi	255	1280	1430
	33mils (20ga) 33ksi	110	605	605
	43mils (18ga) 33ksi	140	905	905
UBC8-68	54mils (16ga) 50ksi	190	1235	1340
68mils (14ga)	68mils (14ga) 50ksi	190	1235	1340
	97 mils (12ga) 50ksi	190	1235	1340
	33mils (20ga) 33ksi	110	605	605
	43mils (18ga) 33ksi	140	905	905
UBC10-68	54mils (16ga) 50ksi	150	1185	1325
68mils (14ga)	68mils (14ga) 50ksi	150	1185	1325
	97 mils (12ga) 50ksi	150	1185	1325
	33mils (20ga) 33ksi	90	605	605
110040 40	43mils (18ga) 33ksi	90	905	905
UBC12-68	54mils (16ga) 50ksi	90	1190	1300
68mils (14ga)	68mils (14ga) 50ksi	90	1190	1300
	97 mils (12ga) 50ksi	90	1190	1300



Notes:


- 1 Allowable loads (ASD) listed represent the capacity of the clip to the stud only (framing connection).
- 2 Allowable Loads have not been increased for the wind, seismic, or other factors.
- 3 An 1/8-in service deflection load limit was applied to clips resisting F2 and F3 loads. In accordance with ICC AC 261, service deflection limit was not applied to clips resisting F1 loads.
- 4 For Deflection connection, one #14 shouldered screw (Deflection Screw) shall be installed per slot, placed at the center. #14 Deflection Screws are provided with each Universal Bypass Clip.
- 5 Listed capacities are based on the maximum screw pattern. For maximum screw pattern, fill #14 Deflection screws in each slot for a Deflection Clip.
- 6 It is the responsibility of the design professional to design the attachment of the clips to the structure and verify that their capacity meets the requirements of the intended application.
- 7 Nominal or LRFD loads are available upon request.


UBC - 14ga (As a Deflection Connection)

ATTACHMENT TO STRUCTURAL: WELDED

	Stud Thickness /	ASD Allowable Loads (lbs)		
Product Code	Yield Strength	F1 (In-Plane) w/ (3) #14	F2 (Tension) w/ (3) #14	F3 (Compression) w/ (3) #14
	33mils (20ga) 33ksi	110	605	605
LIDC((0	43mils (18ga) 33ksi	140	905	905
UBC6-68 68mils (14ga)	54mils (16ga) 50ksi	255	1275	1430
Oomins (14ga)	68mils (14ga) 50ksi	255	1275	1430
	97mils (12ga) 50ksi	255	1275	1430
	33mils (20ga) 33ksi	110	605	605
11000 (0	43mils (18ga) 33ksi	140	905	905
UBC8-68 68mils (14ga)	54mils (16ga) 50ksi	190	1275	1340
oomiis (14ga)	68mils (14ga) 50ksi	190	1275	1340
	97mils (12ga) 50ksi	190	1275	1340
	33mils (20ga) 33ksi	110	605	605
LID C10 (0	43mils (18ga) 33ksi	140	905	905
UBC10-68 68mils (14ga)	54mils (16ga) 50ksi	150	1275	1325
oomiis (14ga)	68mils (14ga) 50ksi	150	1275	1325
	97mils (12ga) 50ksi	150	1275	1325
	33mils (20ga) 33ksi	90	605	605
110040 40	43mils (18ga) 33ksi	90	905	905
UBC12-68	54mils (16ga) 50ksi	90	1275	1300
68mils (14ga)	68mils (14ga) 50ksi	90	1275	1300
	97mils (12ga) 50ksi	90	1275	1300

- 1 Allowable Loads (ASD) have not been increased for the wind, seismic, or other factors.
- 2 For Deflection clip, one #14 shouldered screw (UBC Deflection Screw) shall be installed per slot, placed at the center. Clip gauge-specific #14 UBC Deflection Screws are provided with each Universal Bypass Clip.
- 3 Listed capacities are based on the maximum screw pattern. For maximum screw pattern, fill #14 Deflection screws in each slot for a Deflection Clip.
- 4 The Allowable loads listed for welds are based on the following weld lengths:
- (2) Welds 1" along back of short leg clip bend (each weld equally distanced from center of clip)
- **5** Use E70XX (min.) electrodes.
- 6 It is the responsibility of the design professional to verify that the connection design meets the requirements of the intended application.
- 7 Nominal or LRFD loads are available upon request.






(3) #14 Deflection Screw Pattern Shown in a UBC6 Clip

UBC - 14ga (As a Deflection Connection)

ATTACHMENT TO STRUCTURAL: (4) #12-24 FASTENERS

•			Alla	CHMENTIOSIKOC
	C ITILL (ASD Allowable Loads (Ibs)
Product Code	Stud Thickness / Yield Strength	F1 (In-Plane) w/ (3) #14	F2 (Tension) w/ (3) #14	F3 (Compression) w/ (3) #14
	33mils (20ga) 33ksi	110	605	605
11007 70	43mils (18ga) 33ksi	140	905	905
UBC6-68	54mils (16ga) 50ksi	255	1280	1430
68mils (14ga)	68mils (14ga) 50ksi	255	1280	1430
	97mils (12ga) 50ksi	255	1280	1430
	33mils (20ga) 33ksi	110	605	605
	43mils (18ga) 33ksi	140	905	905
UBC8-68	54mils (16ga) 50ksi	190	1235	1340
68mils (14ga)	68mils (14ga) 50ksi	190	1235	1340
	97mils (12ga) 50ksi	190	1235	1340
	33mils (20ga) 33ksi	110	605	605
110010 (0	43mils (18ga) 33ksi	140	905	905
UBC10-68 68mils (14ga)	54mils (16ga) 50ksi	150	1185	1325
oomiis (14ga)	68mils (14ga) 50ksi	150	1185	1325
	97mils (12ga) 50ksi	150	1185	1325
	33mils (20ga) 33ksi	90	605	605
110010 (0	43mils (18ga) 33ksi	90	905	905
UBC12-68 68mils (14ga)	54mils (16ga) 50ksi	90	1190	1300
Joinns (1489)	68mils (14ga) 50ksi	90	1190	1300
	97mils (12ga) 50ksi	90	1190	1300



Notes


- 1 Allowable Loads (ASD) have not been increased for the wind, seismic, or other factors.
- 2 An 1/8-in service deflection load limit was applied to clips resisting F2 and F3 loads. In accordance with ICC AC 261, service deflection limit was not applied to clips resisting F1 loads.
- 3 For Deflection clip, one #14 shouldered screw (UBC Deflection Screw) shall be installed per slot, placed at the center. Clip gauge-specific #14 UBC Deflection Screws are provided with each UBC.
- 4 Listed capacities are based on the maximum screw pattern. For maximum screw pattern, fill #14 Deflection screws in each slot for a Deflection Clip.
- 5 #12-24 Fasteners shall be used for attachment to 3/16" steel structure. (4) Fastener configuration shall be used. Screws should be placed at indentations scribed on the short leg of the UBC clip.
- **6** The minimum edge distance for each fastener type shall comply with the fastener manufacturer's recommendation.
- 7 It is the responsibility of the design professional to verify that the connection design meets the requirements of the intended application.
- 8 Nominal or LRFD loads are available upon request.


UBC - 14ga (As a Deflection Connection)

ATTACHMENT TO STRUCTURAL: (4) 0.157" PAFs

	Stud Thickness /	,	ASD Allowable Loads (Ib	s)
Product Code	Yield Strength	F1 (In-Plane) w/ (3) #14	F2 (Tension) w/ (3) #14	F3 (Compression) w/ (3) #14
	33mils (20ga) 33ksi	110	605	605
LIDG((0	43mils (18ga) 33ksi	140	905	905
UBC6-68 68mils (14ga)	54mils (16ga) 50ksi	255	1280	1430
oonins (14ga)	68mils (14ga) 50ksi	255	1280	1430
	97mils (12ga) 50ksi	255	1280	1430
	33mils (20ga) 33ksi	110	605	605
LIDCO (0	43mils (18ga) 33ksi	140	905	905
UBC8-68 68mils (14ga)	54mils (16ga) 50ksi	190	1235	1340
Oomins (14ga)	68mils (14ga) 50ksi	190	1235	1340
	97mils (12ga) 50ksi	190	1235	1340
	33mils (20ga) 33ksi	110	605	605
LID C10 . C0	43mils (18ga) 33ksi	140	905	905
UBC10-68	54mils (16ga) 50ksi	150	1185	1325
68mils (14ga)	68mils (14ga) 50ksi	150	1185	1325
	97mils (12ga) 50ksi	150	1185	1325
	33mils (20ga) 33ksi	90	605	605
110010 10	43mils (18ga) 33ksi	90	905	905
UBC12-68	54mils (16ga) 50ksi	90	1190	1300
68mils (14ga)	68mils (14ga) 50ksi	90	1190	1300
	97mils (12ga) 50ksi	90	1190	1300

- 1 Allowable Loads (ASD) have not been increased for the wind, seismic, or other factors.
- 2 Capacities considered for Hilti PAFs are based on fastener strengths listed in ICC ESR-2269.
- 3 It is the responsibility of the design professional to verify that the connection design meets the requirements of the intended application.
- 4 Listed capacities are based on the maximum screw pattern. For maximum screw pattern, fill #14 Deflection screws in each slot for a Deflection Clip.
- 5 Nominal or LRFD loads are available upon request.
- 6 An 1/8-in service deflection load limit was applied to clips resisting F2 and F3 loads. In accordance with ICC AC 261, service deflection limit was not applied to clips resisting F1 loads.
- 7 For Deflection clip, one #14 shouldered screw (UBC Deflection Screw) shall be installed per slot, placed at the center. Clip gauge-specific #14 UBC Deflection Screws are provided with each UBC.
- 8 0.157" Hilti X-U PAFs shall be used for attachment to 3/16" steel structure. (4) Fastener configuration shall be used. PAFs should be placed at indentations scribed on the short leg of the UBC clip.






(3) #14 Deflection Screw Pattern Shown in a UBC6 Clip

Universal Bypass Clip

UBC - 12ga (As a Deflection Connection)

ATTACHMENT TO STRUCTURAL: DESIGNED BY OTHERS

• •		ATTACHMENT TOSTROCTO				
	C ITI'I (ASD Allowable Loads (lbs)			
Product Code	Stud Thickness / Yield Strength	F1 (In-Plane) w/ (3) #14	F2 (Tension) w/ (3) #14	F3 (Compression) w/ (3) #14		
	33mils (20ga) 33ksi	110	605	605		
11004.07	43mils (18ga) 33ksi	140	905	905		
UBC6-97	54mils (16ga) 50ksi	260	1535	1680		
97mils (12ga)	68mils (14ga) 50ksi	280	1535	1680		
	97mils (12ga) 50ksi	280	1535	1680		
	33mils (20ga) 33ksi	110	605	605		
	43mils (18ga) 33ksi	140	905	905		
UBC8-97	54mils (16ga) 50ksi	225	1525	1685		
97mils (12ga)	68mils (14ga) 50ksi	225	1525	1685		
	97mils (12ga) 50ksi	225	1525	1685		
	33mils (20ga) 33ksi	110	605	605		
	43mils (18ga) 33ksi	140	905	905		
UBC10-97	54mils (16ga) 50ksi	185	1490	1630		
97mils (12ga)	68mils (14ga) 50ksi	185	1490	1630		
	97mils (12ga) 50ksi	185	1490	1630		
	33mils (20ga) 33ksi	90	605	605		
110010.07	43mils (18ga) 33ksi	90	905	905		
UBC12-97	54mils (16ga) 50ksi	90	1490	1630		
97mils (12ga)	68mils (14ga) 50ksi	90	1490	1630		
	97mils (12ga) 50ksi	90	1490	1630		



Notes:


- 1 Allowable loads (ASD) listed represent the capacity of the clip to the stud only. (Framing connection).
- 2 Allowable Loads have not been increased for the wind, seismic, or other factors.
- 3 An 1/8-in service deflection load limit was applied to clips resisting F2 and F3 loads. In accordance with ICC AC 261, service deflection limit was not applied to clips resisting F1 loads.
- 4 For Deflection connection, one #14 shouldered screw (Deflection Screw) shall be installed per slot, placed at the center. #14 Deflection Screws are provided with each Universal Bypass Clip.
- 5 Listed capacities are based on the maximum screw pattern. For maximum screw pattern, fill #14 Deflection screws in each slot for a Deflection Clip.
- 6 It is the responsibility of the design professional to design the attachment of the clips to the structure and verify that their capacity meets the requirements of the intended application.
- 7 Nominal or LRFD loads are available upon request.


UBC - 12ga (As a Deflection Connection)

ATTACHMENT TO STRUCTURAL: WELDED

	Stud Thickness /	ASD Allowable Loads (lbs)				
Product Code	Yield Strength	F1 (In-Plane) w/ (3) #14	F2 (Tension) w/ (3) #14	F3 (Compression) w/ (3) #14		
	33mils (20ga) 33ksi	110	605	605		
LIDC(07	43mils (18ga) 33ksi	140	905	905		
UBC6-97 97mils (12ga)	54mils (16ga) 50ksi	260	1535	1680		
9711111s (12ga)	68mils (14ga) 50ksi	280	1535	1680		
	97mils (12ga) 50ksi	280	1535	1680		
	33mils (20ga) 33ksi	110	605	605		
11000 07	43mils (18ga) 33ksi	140	905	905		
UBC8-97 97mils (12ga)	54mils (16ga) 50ksi	225	1535	1685		
9711111s (12ga)	68mils (14ga) 50ksi	225	1535	1685		
	97mils (12ga) 50ksi	225	1535	1685		
	33mils (20ga) 33ksi	110	605	605		
LID C10 07	43mils (18ga) 33ksi	140	905	905		
UBC10-97 97mils (12ga)	54mils (16ga) 50ksi	185	1535	1630		
9711111s (12ga)	68mils (14ga) 50ksi	185	1535	1630		
	97mils (12ga) 50ksi	185	1535	1630		
	33mils (20ga) 33ksi	90	605	605		
110010 07	43mils (18ga) 33ksi	90	905	905		
UBC12-97	54mils (16ga) 50ksi	90	1535	1630		
97mils (12ga)	68mils (14ga) 50ksi	90	1535	1630		
	97mils (12ga) 50ksi	90	1535	1630		

- 1 Allowable Loads (ASD) have not been increased for the wind, seismic, or other factors.
- 2 For Deflection clip, one #14 shouldered screw (UBC Deflection Screw) shall be installed per slot, placed at the center. Clip gauge-specific #14 UBC Deflection Screws are provided with each Universal Bypass Clip.
- 3 Listed capacities are based on the maximum screw pattern. For maximum screw pattern, fill #14 Deflection screws in each slot for a Deflection Clip.
- 4 The Allowable loads listed for welds are based on the following weld lengths:
- (2) Welds 1" along back of short leg clip bend (each weld equally distanced from center of clip)
- 5 Use E70XX (min.) electrodes.
- 6 It is the responsibility of the design professional to verify that the connection design meets the requirements of the intended application.
- 7 Nominal or LRFD loads are available upon request.






(3) #14 Deflection Screw Pattern Shown in a UBC6 Clip

UBC - 12ga (As a Deflection Connection)

ATTACHMENT TO STRUCTURAL: (4) #12-24 FASTENERS

•		111 111 111 110 1					
	C ITILL /		ASD Allowable Loads (lbs)				
Product Code	Stud Thickness / Yield Strength	F1 (In-Plane) w/ (3) #14	F2 (Tension) w/ (3) #14	F3 (Compression) w/ (3) #14			
	33mils (20ga) 33ksi	110	605	605			
11004.07	43mils (18ga) 33ksi	140	905	905			
UBC6-97 97mils (12ga)	54mils (16ga) 50ksi	260	1535	1680			
9/mils (i2ga)	68mils (14ga) 50ksi	280	1535	1680			
	97mils (12ga) 50ksi	280	1535	1680			
	33mils (20ga) 33ksi	110	605	605			
	43mils (18ga) 33ksi	140	905	905			
UBC8-97	54mils (16ga) 50ksi	225	1525	1685			
97mils (12ga)	68mils (14ga) 50ksi	225	1525	1685			
	97mils (12ga) 50ksi	225	1525	1685			
	33mils (20ga) 33ksi	110	605	605			
	43mils (18ga) 33ksi	140	905	905			
UBC10-97 97mils (12ga)	54mils (16ga) 50ksi	185	1490	1630			
9711111S (12ga)	68mils (14ga) 50ksi	185	1490	1630			
	97mils (12ga) 50ksi	185	1490	1630			
	33mils (20ga) 33ksi	90	605	605			
LID C42 07	43mils (18ga) 33ksi	90	905	905			
UBC12-97 97mils (12ga)	54mils (16ga) 50ksi	90	1490	1630			
7/IIIIIs (IZga)	68mils (14ga) 50ksi	90	1490	1630			
	97mils (12ga) 50ksi	90	1490	1630			



Notes:


- 1 Allowable Loads (ASD) have not been increased for the wind, seismic, or other factors.
- 2 An 1/8-in service deflection load limit was applied to clips resisting F2 and F3 loads. In accordance with ICC AC 261, service deflection limit was not applied to clips resisting F1 loads.
- 3 For Deflection clip, one #14 shouldered screw (UBC Deflection Screw) shall be installed per slot, placed at the center. Clip gauge-specific #14 UBC Deflection Screws are provided with each UBC.
- 4 Listed capacities are based on the maximum screw pattern. For maximum screw pattern, fill #14 Deflection screws in each slot for a Deflection Clip.
- 5 #12-24 Fasteners shall be used for attachment to 3/16" steel structure. (4) Fastener configuration shall be used. Screws should be placed at indentations scribed on the short leg of the UBC clip.
- 6 The minimum edge distance for each fastener type shall comply with the fastener manufacturer's recommendation.
- 7 It is the responsibility of the design professional to verify that the connection design meets the requirements of the intended application.
- 8 Nominal or LRFD loads are available upon request.


UBC - 12ga (As a Deflection Connection)

ATTACHMENT TO STRUCTURAL: (4) 0.157" PAFs

	Stud Thickness /	ASD Allowable Loads (lbs)				
Product Code	Yield Strength	F1 (In-Plane) w/ (3) #14	F2 (Tension) w/ (3) #14	F3 (Compression) w/ (3) #14		
	33mils (20ga) 33ksi	110	605	605		
11004 07	43mils (18ga) 33ksi	140	905	905		
UBC6-97 97mils (12ga)	54mils (16ga) 50ksi	260	1535	1680		
7711111S (12ga)	68mils (14ga) 50ksi	280	1535	1680		
	97mils (12ga) 50ksi	280	1535	1680		
	33mils (20ga) 33ksi	110	605	605		
11000 07	43mils (18ga) 33ksi	140	905	905		
UBC8-97 97mils (12ga)	54mils (16ga) 50ksi	225	1525	1685		
9711111S (12ga)	68mils (14ga) 50ksi	225	1525	1685		
	97mils (12ga) 50ksi	225	1525	1685		
	33mils (20ga) 33ksi	110	605	605		
LID C10, 07	43mils (18ga) 33ksi	140	905	905		
UBC10-97 97mils (12ga)	54mils (16ga) 50ksi	185	1490	1630		
9711111S (12ga)	68mils (14ga) 50ksi	185	1490	1630		
	97mils (12ga) 50ksi	185	1490	1630		
	33mils (20ga) 33ksi	90	605	605		
110040.07	43mils (18ga) 33ksi	90	905	905		
UBC12-97	54mils (16ga) 50ksi	90	1490	1630		
97mils (12ga)	68mils (14ga) 50ksi	90	1490	1630		
	97mils (12ga) 50ksi	90	1490	1630		

- 1 Allowable Loads (ASD) have not been increased for the wind, seismic, or other factors.
- 2 Capacities considered for Hilti PAFs are based on fastener strengths listed in ICC ESR-2269.
- 3 It is the responsibility of the design professional to verify that the connection design meets the requirements of the intended application.
- 4 Listed capacities are based on the maximum screw pattern. For maximum screw pattern, fill #14 Deflection screws in each slot for a Deflection Clip.
- 5 Nominal or LRFD loads are available upon request.
- 6 An 1/8-in service deflection load limit was applied to clips resisting F2 and F3 loads. In accordance with ICC AC 261, service deflection limit was not applied to clips resisting F1 loads.
- 7 For Deflection clip, one #14 shouldered screw (UBC Deflection Screw) shall be installed per slot, placed at the center. Clip gauge-specific #14 UBC Deflection Screws are provided with each UBC.
- 8 0.157" Hilti X-U PAFs shall be used for attachment to 3/16" steel structure. (4) Fastener configuration shall be used. PAFs should be placed at indentations scribed on the short leg of the UBC clip.





(3) #14 Deflection Screw Pattern Shown in a UBC6 Clip

Fast Top™ Clip

Head-of-wall connection

Head-of-wall deflection conditions for exterior curtain wall and interior, nonload-bearing walls.

ClarkDietrich Fast Top™ Clips are used in head-of-wall deflection conditions for in-fill curtain wall assemblies and/ or interior nonload-bearing partitions to provide for vertical movement. These clips are used in place of, or in combination with, deflection track. They also make a positive attachment and eliminate the need to install bridging continuously throughout the upper-most punchouts. The Fast Top clip connectors can be attached to the underside of structural members, concrete decks or floor assemblies. Studs must be cut less than full height to enable vertical movement up to 2-1/2" (1-1/4" up and down). Fast Top clips install quickly with welds, screws or powder-actuated fasteners. Proprietary Deflection Screws are used to attach the clip to the coldformed framing and to ensure frictionless deflection. These clips are also embossed with fastening patterns to ensure accurate placement

INSTALLATION

Connections to the building can be made with screws, powder-actuated fasteners, drill-in concrete anchors or welding. Mechanical fasteners shall be equally spaced along the scored line of the 1-1/2" flange. When using the tabulated allowable loads in the tables on the opposite page, connections to the building structure must be made according to the notes. Proprietary Deflection Screws are used to attach the clip to the cold-formed steel framing. Screws shall be driven through the slotted holes and positioned to allow for the appropriate building deflection. Two deflection screws are required with the FTC3, three deflection screws are required with the FTC5, and four deflection screws are required with the FTC5, TC10, FTC12.


MATERIAL SPECIFICATIONS


Gauge: 14 gauge (68mils)


Design Thickness: 0.0713 inches

Coating: G90 Yield Strength: 50ksi ASTM: A653/A653M

of fasteners.








ALTERNATIVE PRODUCTS


MaxTrak® Slotted Deflection Track

FTC3 FTC5 FTC8

Fast Top™ Clip (FTC) **Product Thickness** Packaging Product Code Design Thickness (in) Pcs./Bucket Mils (Gauge) 68mils (14ga) 0.0713 1-1/2 x 4 x 3-1/4 FTC3 25 FTC5 68mils (14ga) 0.0713 1-1/2 x 4 x 4-3/4 30 FTC8 68mils (14ga) 0.0713 1-1/2 x 4 x 7-3/4 25 68mils (14ga) FTC10 0.0713 1-1/2 x 4 x 9-3/4 FTC12 68mils (14ga) 0.0713 1-1/2 x 4 x 11-3/4 25

FTC3 includes 55 Proprietary Deflection Screws per carton. FTC5 includes 110 Proprietary Deflection Screws per carton. FTC8 includes 110 Proprietary Deflection Screws per carton. FTC10 includes 110 Proprietary Deflection Screws per carton. FTC12 includes 110 Proprietary Deflection Screws per carton.





FTC10

FTC12

Proprietary Deflection Screw

U.S. Patent No. 6,688,069

FTC3 Allowable Loads (lbs)

			Mechanically Anchored					
Stud Thickness / Yield Strength	Slip Allowance (in)	Welded direct to structural steel	Number of Anchors	PAF in steel (FS=5)	PAF in steel (FS=10)	Buildex #12-24 screws in steel	Hilti 1/4" x 1-3/4" Kwik-Cons in concrete	
	0.75	259	2	259	252	259	241	
20 (22: -) 22 :		259	3	259	259	259	_	
20ga (33mils) 33ksi	1.25	259	2	259	219	259	206	
		259	3	259	241	259	-	
	0.75	471	2	471	252	471	241	
10 (42: -) 22 :		471	3	471	286	471	_	
18ga (43mils) 33ksi		471	2	437	219	471	206	
	1.25	471	3	471	241	471	_	
	0.75	551	2	504	252	551	241	
16 (E 4: -) 22 :		551	3	551	286	551	_	
16ga (54mils) 33ksi	1.25	551	2	437	219	551	206	
	1.25	551	3	477	241	551	_	



FTC5 Allowable Loads (lbs)


			Mechanically Anchored				
Stud Thickness / Yield Strength	Slip Allowance (in)	Welded direct to structural steel	Number of Anchors	PAF in steel (FS=5)	PAF in steel (FS=10)	Buildex #12-24 screws in steel	Hilti 1/4" x 1-3/4" Kwik-Cons in concrete
		386	2	386	317	386	386
	0.75	386	3	386	386	386	386
20 (22:1-) 221:		386	4	386	386	386	_
20ga (33mils) 33ksi		386	2	386	286	386	386
	1.25	386	3	386	338	386	386
		386	4	386	371	386	_
		505	2	505	317	505	469
	0.75	505	3	505	389	505	466
10 (42 :17.22) :		505	4	505	440	505	_
18ga (43mils) 33ksi	1.25	505	2	505	286	505	411
		505	3	505	338	505	399
		505	4	505	371	505	_
	0.75	638	2	634	317	638	469
		638	3	638	389	638	466
16 (E4 :17.22) :		638	4	638	440	638	_
16ga (54mils) 33ksi		638	2	571	286	638	411
	1.25	638	3	638	338	638	399
		638	4	638	371	638	
		1061	2	634	317	852	469
	0.75	1061	3	779	389	1061	466
(F4 :1) FO! :		1061	4	879	440	1061	_
16ga (54mils) 50ksi		1061	2	571	286	789	411
	1.25	1061	3	676	338	922	399
		1061	4	738	371	922	_


Notes:

- 1 For the FTC3, tabulated values for welds are based on 3-1/4" of weld along each edge of the 1-1/2" clip leg.
- 2 For the FTC3, tabulated values for the PAFs and Buildex screws are based on the following: the outermost anchors are placed 1/2" (min.) away from the clip edge and/or bearing edge, anchors are spaced at 2-1/4" (min.) when using two anchors, and 1-1/8" (min.) when using three anchors.
- 3 For the FTC3, tabulated values for Hilti Kwik-Cons are based on the following: anchors are spaced at 2-1/4" o.c. (min.); anchors are placed 3/4" (min.) away from edge of building structure, and 1/2" (min.) away from edge of the Fast Top Clip. The tabulated values are based on 3000psi normal weight concrete.
- 4 For the FTC5, tabulated values for welds are based on 4-1/2" of weld along each edge of the 1-1/2" clip leg.
- 5 For the FTC5, tabulated values for the PAFs and Buildex screws are based on the following: the outermost anchors are placed 1/2" (min.) away from the clip edge and/or bearing edge; anchors are spaced at 3-3/4" (min.) when using two anchors, 1-7/8" (min.) when using three anchors, and 1-1/4" when using four anchors.

- 6 For the FTC5, tabulated values for Hilti Kwik-Cons are based on the following: anchors are spaced at 3-3/4" (min.) when using two anchors, and 1-7/8" when using three anchors; anchors are placed 3/4" (min.) away from edge of building structure and 1/2" (min.) away from edge of the Fast Top Clip. The tabulated values are based on 3000psi normal weight concrete.
- 7 Capacities listed for PAFs are based on minimum PAF requirements listed in General Note #6 on page 9.
- 8 #12-24 screws shall have ultimate shear and tension capacities equal to or greater than those listed on page 6.
- **9** It is the responsibility of the design professional to detail the project drawings for proper clip attachment.
- **10** Contact ClarkDietrich at 888-437-3244 for technical assistance.
- 11 Hilti is a registered trademark of Hilti Aktiengeseilschaft Corporation.
- 12 Buildex is a registered trademark of Illinois Tool Works, Inc.

TYPICAL CONSTRUCTION DETAILS





Visit our CAD Library at cad.clarkdietrich.com to view or download construction details in .dwg, .dxf, and .pdf formats.


Fast Top™ Clip


Head-of-wall connection


FTC8/FTC10/FTC12 Allowable Loads (lbs)


			Mechanically Anchored				
Stud Thickness / Yield strength	Number of screws to CFS framing	Weld capacity (5-in weld) F2 Load	Number of anchors	(0.157" XU) PAFs (3/16") steel	(0.145" XU15) PAFs (3/16") steel	#12-24 screws (3/16") steel	
			3	450	320	450	
33mils (20ga) 33ksi	4	450	4	450	410	450	
			5	450	450	450	
	4	890	3	850	320	890	
43mils (18ga) 33ksi			4	890	410	890	
			5	890	490	890	
	4	1300	3	850	320	1300	
54mils (16ga) 50ksi			4	1070	410	1300	
			5	1290	490	1300	
			3	850	320	1380	
68mils (14ga) 50ksi	4	1670	4	1070	410	1670	
			5	1290	490	1670	
			3	850	320	1380	
97mils (12ga) 50ksi	4	2230	4	1070	410	1750	
			5	1290	490	2100	

- 1 Tabulated capacities are for end reaction load directed parallel with the axis of the clip bend, F2 as shown in right image.
- 2 The tabulated values for weld capacities are based on a minimum weld length of 5" centered along the clip bend. E70xx weld assumed to a minimum 3/16" thick A36 structural steel component.
- 3 The tabulated values for #12-24 screws and Hilti PAFs assume a connection centered on a minimum 3/16" thick x 6" wide ASTM A36 structural steel component. These fasteners are to be placed in a single line 3/4" from the 90° bend in the clip.
- 4 Minimum fastener spacing assumed to vary with the number of mechanical fasteners used:
 - a) Three anchors assumed to be spaced 2.5" on-center;
 - b) Four anchors assumed to be spaced 1.67" on-center;
 - c) Five anchors assumed to be spaced 1.25" on-center.
- 5 The minimum edge distance for each fastener type shall comply with the fastener manufacturer's recommendation.
- 6 Capacities listed for #12-24 screws are based on screw strengths listed in CFSEI Tech Note F701-12.
- 7 Capacities listed for Hilti PAFs are based on fastener strengths listed in ICC ESR-2269.
- 8 The FTC shall be connected to the steel framing using ClarkDietrich Proprietary screws (included) installed in all slots of the FTC clip leg; Listed capacities are for the ClarkDietrich Proprietary screws centered in the slotted openings.
- 9 It is the responsibility of the design professional to detail the attachment of the clips and verify that their capacity meets the requirements of the intended application.

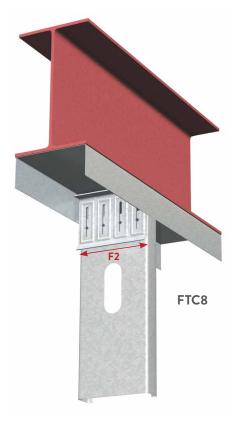







Flat Tail™ Slide Clip

Curtain Wall/Bypass

Allows for vertical building movement and provides a horizontal standoff.

ClarkDietrich's Flat Tail™ Slide Clip is used to attach exterior curtain wall studs to the building structure and provide for 2-1/4" vertical building movement independent of the cold-formed steel framing. A Flat Tail Slide Clip provides variable standoff and eliminates the need for shims or additional framing components. The clip easily fastens to the floor/ceiling beam and is secured to the stud with ClarkDietrich Proprietary HD Deflection Screws. The clip restricts lateral movement, but enables vertical movement.

INSTALLATION

Connection to the building can be made with screws, powder-actuated fasteners (PAFs), or by welding.

Mechanical fasteners shall be located in the pilot holes.

(2) Proprietary HD Deflection Screws are required in each slot to attach the clip to the cold-formed steel framing. Screws shall be placed in the slot with 1" center-to-center spacing using guide lines as a reference.

CLIP THICKNESS

Gauge: 12 gauge (97mils)


Gauge: 10 gauge (118mils)


Design Thickness: 0.1017 inches


Design Thickness: 0.1242 inches


MATERIAL SPECIFICATIONS

Coatings: G90 Yield Strength: 50ksi ASTM: A653/A1003









Flat Tail™ Slide Clip (FTSC)

Pro	Product Code Product Thickness		Size (in)	De de die a Des /Berdes	
	Froduct code	Mils (Gauge)	Design thickness (in)) Size (in)	Packaging Pcs./Bucket
	FTSC3-97	97mils (12ga)	0.1017	4-1/2" x 9-1/2" x 4-1/4"	25
	FTSC3-118	118mils (10ga)	0.1242	4-1/2" x 9-1/2" x 4-1/4"	25

D 1 . 1	Product '	Thickness	S: (:)	Packaging Pcs./Bucket	
Product code	Mils (Gauge)	Design thickness (in)	Size (in)		
FTSC6-97	97mils (12ga)	0.1017	4-1/2" x 11-1/2" x 4-1/4"	25	
FTSC6-118	118mils (10ga)	0.1242	4-1/2" x 11-1/2" x 4-1/4"	25	

Notes:

- Clips: 25 clips per bucket.
- Includes 110 Proprietary HD Deflection Screws for FTSC3 per bucket.
- Includes 160 Proprietary HD Deflection Screws for FTSC6 per bucket.

PROPRIETARY DEFLECTION SCREWS

Many of the Clark Dietrich deflection clips include our Proprietary Deflection Screw that has been specifically designed to provide friction-free deflection. These fasteners eliminate drag, binding or resistance that can often occur with common fasteners.






Proprietary HD Deflection Screw (10ga and 12ga Clips Only)

Flat Tail™ Slide Clip

ATTACHMENT TO STRUCTURE: DESIGNED BY OTHERS


3-5/8" Flat Tail™ Slide Clip (FTSC3)

	Stud Thickness /		ASD A	Allowable Loa	ds (lbs)
Product code	Yield Strength	Attachment to Structure	F1 Load	F2 Load	F3 Load
	33mils (20ga) 33ksi		110	416	388
	43mils (18ga) 33ksi	(0) 5	144	548	397
	54mils (16ga) 50ksi	(2) Fasteners to be designed by others	261	759	596
	68mils (14ga) 50ksi	designed by others	268	766	673
FTSC3-97	97mils (12ga) 50ksi		468	909	699
F15C3-97	33mils (20ga) 33ksi		110	506	428
	43mils (18ga) 33ksi	(4) Fasteners to be designed by others	144	660	397
	54mils (16ga) 50ksi		261	759	596
	68mils (14ga) 50ksi		268	766	673
	97mils (12ga) 50ksi		468	909	769
	33mils (20ga) 33ksi		110	607	406
	43mils (18ga) 33ksi	(0) 5	144	816	603
	54mils (16ga) 50ksi	(2) Fasteners to be designed by others	261	816	774
	68mils (14ga) 50ksi	designed by others	328	924	834
FTSC3-118	97mils (12ga) 50ksi		468	924	924
F13C3-118	33mils (20ga) 33ksi		110	607	445
	43mils (18ga) 33ksi		144	816	603
	54mils (16ga) 50ksi	(4) Fasteners to be designed by others	261	816	789
	68mils (14ga) 50ksi	designed by others	328	924	860
	97mils (12ga) 50ksi		468	924	924



6" Flat Tail™ Slide Clip (FTSC6)


	Stud Thickness /		ASD Allowable Loads (lbs)			
Product code	Yield Strength	Attachment to Structure	F1 Load	F2 Load	F3 Load	
	33mils (20ga) 33ksi		165	845	551	
	43mils (18ga) 33ksi	(0) =	216	946	724	
	54mils (16ga) 50ksi	(2) Fasteners to be designed by others	316	1057	914	
	68mils (14ga) 50ksi	designed by others	444	1163	962	
FTSC6-97	97mils (12ga) 50ksi		444	1383	1063	
F13C6-97	33mils (20ga) 33ksi		165	869	594	
	43mils (18ga) 33ksi	(4) 5	216	959	755	
	54mils (16ga) 50ksi	(4) Fasteners to be designed by others	392	1057	930	
	68mils (14ga) 50ksi		476	1220	1055	
	97mils (12ga) 50ksi		650	1558	1314	
	33mils (20ga) 33ksi		165	861	594	
	43mils (18ga) 33ksi	(0) =	216	1173	874	
	54mils (16ga) 50ksi	(2) Fasteners to be designed by others	337	1515	1181	
	68mils (14ga) 50ksi	designed by others	492	1682	1265	
FTSC6-118	97mils (12ga) 50ksi		492	2026	1439	
F13C0-110	33mils (20ga) 33ksi		165	953	594	
	43mils (18ga) 33ksi	(4) =	216	1221	891	
	54mils (16ga) 50ksi	(4) Fasteners to be designed by others	392	1515	1215	
	68mils (14ga) 50ksi	designed by others	492	1682	1439	
	97mils (12ga) 50ksi		702	2026	1523	



- 1 Allowable loads (ASD) listed represent the capacity of the clip to the stud only (framing connection).
- 2 Allowable loads have not been increased for wind, seismic, or other factors.
- 3 (2) #14 Shouldered screws (Proprietary HD Deflection Screws) shall be used per slot, placed with 1-in center-to-center spacing.
 - (4) total screws for the FTSC3 (3-5/8" Clip)
 - (6) total screws for the FTSC6 (6" Clip)
 - #14 Proprietary HD Deflection Screws are provided with each Flat Tail Slide Clip
- **4** It is the responsibility of the design professional to detail the attachment of the clips and verify that their capacity meets the requirements of the intended application.

3-5/8" Flat Tail™ Slide Clip (FTSC3)

	Stud Thickness /		ASD A	llowable Load	ds (lbs)
Product code	Yield Strength	Attachment to Structure	F1 Load	F2 Load	F3 Load
	33mils (20ga) 33ksi		110	506	428
FTSC3-97	43mils (18ga) 33ksi	(2) Welds - min. 2" length each on either ends	144	660	397
	54mils (16ga) 50ksi		261	759	596
	68mils (14ga) 50ksi		268	766	673
	97mils (12ga) 50ksi		468	909	769
	33mils (20ga) 33ksi		110	607	445
	43mils (18ga) 33ksi	(2) Welds - min. 2"	144	816	603
FTSC3-118	54mils (16ga) 50ksi	length each on	261	816	789
	68mils (14ga) 50ksi	either ends	328	924	860
	97mils (12ga) 50ksi		468	924	924




6" Flat Tail™ Slide Clip (FTSC6)

B 1	Stud Thickness /		ASD Allowable Loads (lbs)			
Product code	Yield Strength	Attachment to Structure	F1 Load	F2 Load	F3 Load	
	33mils (20ga) 33ksi		165	869	594	
FTSC6-97	43mils (18ga) 33ksi	(2) Welds - min. 2-3/4" length each on either ends	216	959	755	
	54mils (16ga) 50ksi		392	1057	930	
	68mils (14ga) 50ksi		476	1220	1055	
	97mils (12ga) 50ksi		650	1558	1314	
	33mils (20ga) 33ksi		165	953	594	
	43mils (18ga) 33ksi	(2) Welds - min. 2-3/4"	216	1221	891	
FTSC6-118	54mils (16ga) 50ksi	length each	392	1515	1215	
	68mils (14ga) 50ksi	on either ends	492	1682	1316	
	97mils (12ga) 50ksi		702	2026	1523	




- 1 Allowable loads have not been increased for wind, seismic, or other factors.
- 2 (2) #14 Shouldered screws (Proprietary HD Deflection Screws) shall be used per slot placed with 1-in center-to-center spacing.
- (4) total screws for the FTSC3 (3-5/8" Clip)
 (6) total screws for the FTSC6 (6" Clip)
- #14 Proprietary HD Deflection Screws are provided with each Flat Tail Slide Clip
- 3 The tabulated values for welds are based on the following weld lengths:
- For FTSC3 (3-5/8" Clip) use (2) 2" of weld along parallel edges of the Flat Tail structural attachment leg. (As shown)
- For FTSC6 (6" Clip) use (2) 2-3/4" of weld along parallel edges of the Flat Tail structural attachment leg. (As shown)
- 4 Use E70XX (min.) electrodes.
- 5 It is the responsibility of the design professional to detail the attachment of the clips and verify that their capacity meets the requirements of the intended application.



ATTACHMENT TO STRUCTURE: 1/4-28 FASTENERS INTO STEEL


3-5/8" Flat Tail™ Slide Clip (FTSC3)

	Stud Thickness /	•	ASD Allowable Loads (lbs)			
Product code	Yield Strength	Attachment to Structure	F1 Load	F2 Load	F3 Load	
	33mils (20ga) 33ksi		110	416	388	
	43mils (18ga) 33ksi	(2) (1) (2) [144	548	397	
	54mils (16ga) 50ksi	(2) 1/4-28 Fasteners to 3/16" Steel	261	759	596	
	68mils (14ga) 50ksi	to 3/10 Steel	268	766	673	
FTCC2 07	97mils (12ga) 50ksi		305	847	699	
FTSC3-97	33mils (20ga) 33ksi		110	506	428	
	43mils (18ga) 33ksi		144	660	397	
	54mils (16ga) 50ksi	(4) 1/4-28 Fasteners to 3/16" Steel	261	759	596	
	68mils (14ga) 50ksi		268	766	673	
	97mils (12ga) 50ksi		468	909	769	
	33mils (20ga) 33ksi		110	607	406	
	43mils (18ga) 33ksi	(0) 4/4 00 5	144	816	603	
	54mils (16ga) 50ksi	(2) 1/4-28 Fasteners to 3/16" Steel	261	816	774	
	68mils (14ga) 50ksi	to 3/10 Steel	328	924	834	
FTSC3-118	97mils (12ga) 50ksi		337	924	924	
F13C3-118	33mils (20ga) 33ksi		110	607	445	
	43mils (18ga) 33ksi	(4) 4/4 00 5	144	816	603	
	54mils (16ga) 50ksi	(4) 1/4-28 Fasteners to 3/16" Steel	261	816	789	
	68mils (14ga) 50ksi	10 3/10 Steel	328	924	860	
	97mils (12ga) 50ksi		468	924	924	



6" Flat Tail™ Slide Clip (FTSC6)

B 1 . 1	Stud Thickness /	A I C	ASD A	ASD Allowable Loads (Ibs)			
Product code	Yield Strength	Attachment to Structure	F1 Load	F2 Load	F3 Load		
	33mils (20ga) 33ksi		165	845	551		
	43mils (18ga) 33ksi	l	216	847	724		
	54mils (16ga) 50ksi	(2) 1/4-28 Fasteners to 3/16" Steel	283	847	847		
	68mils (14ga) 50ksi	to 3/10 Steel	283	847	847		
FTSC6-97	97mils (12ga) 50ksi		283	847	847		
F13C0-97	33mils (20ga) 33ksi		165	869	594		
	43mils (18ga) 33ksi	(4) 4/4 20 5	216	959	755		
	54mils (16ga) 50ksi	(4) 1/4-28 Fasteners to 3/16" Steel	392	1057	930		
	68mils (14ga) 50ksi	to 3/10 Steel	476	1220	1055		
	97mils (12ga) 50ksi		639	1288	1288		
	33mils (20ga) 33ksi		165	861	594		
	43mils (18ga) 33ksi	(2) 4/4 20 F	216	931	874		
	54mils (16ga) 50ksi	(2) 1/4-28 Fasteners to 3/16" Steel	314	931	931		
	68mils (14ga) 50ksi	to 3/10 Steel	314	931	931		
FTSC6-118	97mils (12ga) 50ksi		314	931	931		
F13C0-116	33mils (20ga) 33ksi		165	953	594		
	43mils (18ga) 33ksi	(4) 4/4 20 5	216	1221	891		
	54mils (16ga) 50ksi	(4) 1/4-28 Fasteners to 3/16" Steel	392	1375	1215		
	68mils (14ga) 50ksi	to 3/10 Steel	492	1375	1316		
	97mils (12ga) 50ksi		702	1375	1375		




- 1 Allowable loads have not been increased for wind, seismic, or other factors.
- 2 (2) #14 Shouldered screws (Proprietary HD Deflection Screws) shall be used per slot placed with 1-in center-to-center spacing.
 - (4) total screws for the FTSC3 (3-5/8" Clip)
 - (6) total screws for the FTSC6 (6" Clip)
 - #14 Proprietary HD Deflection Screws are provided with each Flat Tail Slide Clip
- 3 1/4-28 Fasteners shall be used for attachment to steel structure. (2) Fastener condition shall be used when a larger offset is required between the structure and the stud. In all other conditions (4) Fastener condition shall be used. Screws to be placed through 5/s2" pilot holes in FTSC.
- 4 The minimum edge distance for each fastener type shall comply with the fastener manufacturer's recommendation.
- 5 Capacities listed for 1/4-28 Fasteners are based on screw strengths listed in ICC ESR-1976.
- **6** It is the responsibility of the design professional to detail the attachment of the clips and verify that their capacity meets the requirements of the intended application.

ATTACHMENT TO STRUCTURE: 12-24 FASTENERS INTO STEEL


3-5/8" Flat Tail™ Slide Clip (FTSC3)

	Stud Thickness /	•	ASD A	Allowable Load	ds (lbs)
Product code	Yield Strength	Attachment to Structure	F1 Load	F2 Load	F3 Load
	33mils (20ga) 33ksi		110	416	388
	43mils (18ga) 33ksi	(0) 10 0 1 5	144	548	397
	54mils (16ga) 50ksi	(2) 12-24 Fasteners to 3/16" Steel	258	716	596
	68mils (14ga) 50ksi	to 3/10 Steel	258	716	673
ETC C 2 0.7	97mils (12ga) 50ksi		258	716	699
FTSC3-97	33mils (20ga) 33ksi		110	506	428
	43mils (18ga) 33ksi	(4) 40 04 5	144	660	397
	54mils (16ga) 50ksi	(4) 12-24 Fasteners to 3/16" Steel	261	759	596
	68mils (14ga) 50ksi		268	766	673
	97mils (12ga) 50ksi		468	909	769
	33mils (20ga) 33ksi		110	607	406
	43mils (18ga) 33ksi	(0) 40 0 4 5	144	763	603
	54mils (16ga) 50ksi	(2) 12-24 Fasteners to 3/16" Steel	261	763	763
	68mils (14ga) 50ksi	to 3/10 Steel	276	763	763
FTSC3-118	97mils (12ga) 50ksi		276	763	763
F13C3-II0	33mils (20ga) 33ksi		110	607	445
	43mils (18ga) 33ksi	(4) 42 24 5	144	816	603
	54mils (16ga) 50ksi	(4) 12-24 Fasteners to 3/16" Steel	261	816	789
	68mils (14ga) 50ksi	10 3/10 31661	328	924	860
	97mils (12ga) 50ksi		468	924	924



6" Flat Tail™ Slide Clip (FTSC6)

	Stud Thickness /		ASD A	ASD Allowable Loads (lbs)			
Product code	Yield Strength	Attachment to Structure	F1 Load	F2 Load	F3 Load		
	33mils (20ga) 33ksi		165	716	551		
	43mils (18ga) 33ksi	(0) 10 0 1 5	216	716	716		
	54mils (16ga) 50ksi	(2) 12-24 Fasteners to 3/16" Steel	239	716	716		
	68mils (14ga) 50ksi	to 3/10 Steel	239	716	716		
FTSC6-97	97mils (12ga) 50ksi		239	716	716		
F13C0-97	33mils (20ga) 33ksi		165	869	594		
	43mils (18ga) 33ksi		216	959	755		
	54mils (16ga) 50ksi	(4) 12-24 Fasteners to 3/16" Steel	392	1057	930		
	68mils (14ga) 50ksi		476	1096	1055		
	97mils (12ga) 50ksi		541	1096	1096		
	33mils (20ga) 33ksi		165	763	594		
	43mils (18ga) 33ksi	(0) 10 0 1 5	216	763	763		
	54mils (16ga) 50ksi	(2) 12-24 Fasteners to 3/16" Steel	256	763	763		
	68mils (14ga) 50ksi	to 3/10 Steel	256	763	763		
ETC.C/_ 110	97mils (12ga) 50ksi		256	763	763		
FTSC6-118	33mils (20ga) 33ksi		165	953	594		
	43mils (18ga) 33ksi	(4) 40 0 4 5	216	1145	891		
	54mils (16ga) 50ksi	(4) 12-24 Fasteners to 3/16" Steel	392	1145	1145		
	68mils (14ga) 50ksi	to 3/10 Steel	492	1145	1145		
	97mils (12ga) 50ksi		576	1145	1145		




- 1 Allowable loads have not been increased for wind, seismic, or other factors.
- 2 (2) #14 Shouldered screws (Proprietary HD Deflection Screws) shall be used per slot placed with 1-in center-to-center spacing.
- (4) total screws for the FTSC3 (3-5/8" Clip)
- (6) total screws for the FTSC6 (6" Clip)
- #14 Proprietary HD Deflection Screws are provided with each Flat Tail Slide Clip
- 3 #12-24 Fasteners shall be used for attachment to steel structure. (2) Fastener condition shall be used when a larger offset is required between the structure and the stud. In all other conditions (4) Fastener condition shall be used. Screws to be placed through 5/12" pilot holes in FTSC.
- 4 The minimum edge distance for each fastener type shall comply with the fastener manufacturer's recommendation.
- **5** Capacities listed for 12-24 Fasteners are based on screw strengths listed in ICC ESR-1976.
- **6** It is the responsibility of the design professional to detail the attachment of the clips and verify that their capacity meets the requirements of the intended application.

ATTACHMENT TO STRUCTURE: PAF's INTO STEEL


3-5/8" Flat Tail™ Slide Clip (FTSC3)

		•			
	Stud Thickness /		ASD A	Allowable Load	ds (lbs)
Product code	Yield Strength	Attachment to Structure	F1 Load	F2 Load	F3 Load
	33mils (20ga) 33ksi		110	416	388
	43mils (18ga) 33ksi	(0) 0 45711 D.4.5	144	548	397
	54mils (16ga) 50ksi	(2) 0.157" PAFs in 3/16" Steel	230	641	596
	68mils (14ga) 50ksi	III 3/10 Steel	230	641	641
FTSC3-97	97mils (12ga) 50ksi		230	641	641
F13C3-97	33mils (20ga) 33ksi	ů .	506	428	
	43mils (18ga) 33ksi	(4) 0 45711 D.4.5	144	660	397
	54mils (16ga) 50ksi	(4) 0.157" PAFs in 3/16" Steel	261	759	596
	68mils (14ga) 50ksi		268	766	673
	97mils (12ga) 50ksi		468	909	769
	33mils (20ga) 33ksi		110	607	406
	43mils (18ga) 33ksi	(2) 0 457" DA 5	144	641	603
	54mils (16ga) 50ksi	(2) 0.157" PAFs in 3/16" Steel	230	641	641
	68mils (14ga) 50ksi	III 3/10 Steel	230	641	641
FTSC3-118	97mils (12ga) 50ksi		230	641	641
F13C3-110	33mils (20ga) 33ksi		110	607	445
	43mils (18ga) 33ksi	(4) 0 457" DA 5	144	816	603
	54mils (16ga) 50ksi	(4) 0.157" PAFs in 3/16" Steel	261	816	789
	68mils (14ga) 50ksi	111 3/10 36661	328	924	860
	97mils (12ga) 50ksi		468	924	924



6" Flat Tail™ Slide Clip (FTSC6)

	Stud Thickness /		ASD A	llowable Load	ds (lbs)
Product code	Yield Strength	Attachment to Structure	F1 Load	F2 Load	F3 Load
	33mils (20ga) 33ksi		165	641	551
	43mils (18ga) 33ksi	(0) 0 4551 5 4 5	211	641	641
	54mils (16ga) 50ksi	(2) 0.157" PAFs in 3/16" Steel	211	641	641
	68mils (14ga) 50ksi	iii 3/10 Steel	211	641	641
ETC.C/ 07	97mils (12ga) 50ksi		211	641	641
FTSC6-97	33mils (20ga) 33ksi		165	869	594
	43mils (18ga) 33ksi		216	959	755
	54mils (16ga) 50ksi	(4) 0.157" PAFs in 3/16" Steel	392	1025	930
	68mils (14ga) 50ksi		476	1025	1025
	97mils (12ga) 50ksi		484	1025	1025
	33mils (20ga) 33ksi		165	641	594
	43mils (18ga) 33ksi	(0) 0 4551 5 4 5	211	641	641
	43mils (18ga) 33ksi 54mils (16ga) 50ks 68mils (14ga) 50ks 97mils (12ga) 50ksi 33mils (20ga) 33ks 43mils (18ga) 33ksi 54mils (16ga) 50ks 97mils (12ga) 50ksi 33mils (20ga) 33ksi 43mils (18ga) 33ksi 54mils (16ga) 50ksi 68mils (14ga) 50ksi 97mils (12ga) 50ksi 33mils (20ga) 33ksi 43mils (18ga) 33ksi 54mils (16ga) 50ksi 33mils (20ga) 33ksi 43mils (18ga) 33ksi 54mils (16ga) 50ksi 68mils (14ga) 50ksi 68mils (14ga) 50ksi	(2) 0.157" PAFs in 3/16" Steel	211	641	641
	68mils (14ga) 50ksi	III 3/10 Steel	211	641	641
FTCC/ 440	97mils (12ga) 50ksi		211	641 641 641 641 869 959 1025 1025 1025 641 641	641
FTSC6-118	33mils (20ga) 33ksi		165	953	594
	43mils (18ga) 33ksi	(4) 0 45711 DA 5	216	1025	891
	54mils (16ga) 50ksi	(4) 0.157" PAFs in 3/16" Steel	392	1025	1025
	68mils (14ga) 50ksi	III 3/10 Steel	484	1025	1025
	97mils (12ga) 50ksi		484	1025	1025



Notes:


 ${\bf 1}$ Allowable loads have not been increased for wind, seismic, or other factors.

- 2 (2) #14 Shouldered screws (Proprietary HD Deflection Screws) shall be used per slot placed with 1-in center-to-center spacing.
 - (4) total screws for the FTSC3 (3-5/8" Clip)
 - (6) total screws for the FTSC6 (6" Clip)
 - #14 Proprietary HD Deflection Screws are provided with each Flat Tail Slide Clip
- 3 0.157" Hilti XU PAF's shall be used for attachment to steel structure. (2) Fastener condition shall be used when a larger offset is required between the structure and the stud. In all other conditions (4) Fastener condition shall be used. PAF's should be located at cross intersections scribed on the FTSC clip.
- 4 The minimum edge distance for each fastener type shall comply with the fastener manufacturer's recommendation.
- 5 Capacities listed for Hilti PAFs are based on fastener strengths listed in ICC ESR-2269.
- **6** It is the responsibility of the design professional to detail the attachment of the clips and verify that their capacity meets the requirements of the intended application.

ATTACHMENT TO STRUCTURE HILTI KWIK IN CONCRETE


3-5/8" Flat Tail™ Slide Clip (FTSC3)

	Stud Thickness /		ASD A	Allowable Loads (lbs)		
Product code	Yield Strength	Attachment to Structure	F1 Load	F2 Load	F3 Load	
	33mils (20ga) 33ksi	(2) 1/4" Hilti KWIK	110	416	388	
FTSC3-97	43mils (18ga) 33ksi	HUS-EZ	144	548	397	
	54mils (16ga) 50ksi	(2-1/2" Embedment into 3000 psi	261	759	596	
	68mils (14ga) 50ksi		268	766	673	
	97mils (12ga) 50ksi	uncracked concrete)	303	847	699	
	33mils (20ga) 33ksi	(2) 1/4" Hilti KWIK	110	607	406	
	43mils (18ga) 33ksi	HUS-EZ	144	816	603	
FTSC3-118	54mils (16ga) 50ksi	(2-1/2" Embedment	261	816	774	
	68mils (14ga) 50ksi	into 3000 psi	303	847	834	
	97mils (12ga) 50ksi	uncracked concrete)	303	847	847	



6" Flat Tail™ Slide Clip (FTSC6)


	Stud Thickness /		ASD A	llowable Load	ds (lbs)
Product code	Yield Strength	Attachment to Structure	F1 Load	F2 Load	F3 Load
	33mils (20ga) 33ksi	(2) 1/4" Hilti KWIK	165	845	551
FTSC6-97	43mils (18ga) 33ksi	HUS-EZ	216	847	724
	54mils (16ga) 50ksi	(2-1/2" Embedment into 3000 psi	277	847	847
	68mils (14ga) 50ksi		277	847	847
	97mils (12ga) 50ksi	uncracked concrete)	277	847	847
	33mils (20ga) 33ksi	(2) 1/4" Hilti KWIK	165	847	594
	43mils (18ga) 33ksi	HUS-EZ	216	847	847
FTSC6-118	54mils (16ga) 50ksi	into 3000 psi	277	847	847
	68mils (14ga) 50ksi		277	847	847
	97mils (12ga) 50ksi	uncracked concrete)	277	847	847



- 1 Allowable loads have not been increased for wind, seismic, or other factors.
- 2 (2) #14 Shouldered screws (Proprietary HD Deflection Screws) shall be used per slot placed with 1-in center-to-center spacing.
 - (4) total screws for the FTSC3 (3-5/8" Clip)
 - (6) total screws for the FTSC6 (6" Clip)
 - #14 Proprietary HD Deflection Screws are provided with each Flat Tail Slide Clip
- 3 1/4" Hilti KWIK HUS-EZ Anchors shall be used for attachment to concrete structure. Anchors shall only be placed in 3/8" diameter holes.
- 4 Capacities listed in the table/notes consider a 3" minimum edge distance for 1/4" Hilti KWIK HUS-EZ anchors embedded 2-1/2" deep into 3000 psi uncracked concrete.
- 5 The load adjustment for 3-1/2" spacing between concrete anchors has been accounted in the tabulated values.
- 6 The minimum concrete thickness (7" thick for 2-1/2" embedment) shall comply with the fastener manufacturer's recommendation.
- 7 It is the responsibility of the design professional to detail the attachment of the clips and verify that their capacity meets the requirements of the intended application.

3-5/8" Flat Tail™ Slide Clip (FTSC3)

	C ITI'I (Mechanically		A	SD Allowab	le Loads (Ib	s)		
Product code Yield Strength	Stud Thickness /	SS / Anchorod to	Concentric				Eccentric		
	Tield Strength	Structure	F1 Load	F2 Load	F3 Load	F1 Load	F2 Load	F3Load	
FTSC3-97	97mils (12ga) 50ksi	(2) Fasteners to be designed by others	468	909	699	468	918	647	
FTSC3-118	118mils (10ga) 50ksi		468	924	924	468	866	822	



3-5/8" Flat Tail™ Slide Clip (FTSC3)

	C. ITI. /	Mechanically		A	SD Allowab	le Loads (Ib	os)		
Product code Stud Thick Yield Stre	Stud Thickness /	Anchored to		Concentric			Eccentric		
	Tield Strength	Structure	F1 Load	F2 Load	F3 Load	F1 Load	F2 Load	F3Load	
FTSC3-97	97mils (12ga) 50ksi	(2) 1/4-28 Fasteners in 3/16" steel	305	847	699	251	689	647	
FTSC3-118	118mils (10ga) 50ksi		337	924	924	272	744	744	

3-5/8" Flat Tail™ Slide Clip (FTSC3)

	C. ITI: I	ASD Allowable Loads (lbs)						
Product code	Stud Thickness / Yield Strength	Anchored to		Concentric		Eccentric		
	Tield Strength	Structure	F1 Load	F2 Load	F3 Load	F1 Load	F2 Load	F3Load
FTSC3-97	97mils (12ga) 50ksi	(2) 12-24 Fasteners in 3/16" steel	258	716	699	213	585	585
FTSC3-118	118mils (10ga) 50ksi		276	763	763	225	616	616

3-5/8" Flat Tail™ Slide Clip (FTSC3)


	C. ITI'I /	Mechanically		SD Allowable Loads (lbs)				
Product code	Stud Thickness / Yield Strength	Anchored to	Concentric			Eccentric		
	Tield Strength	Structure	F1 Load	F2 Load	F3 Load	F1 Load	F2 Load	F3Load
FTSC3-97	97mils (12ga) 50ksi	(2) 0.157" PAFs in 3/16" steel	230	641	641	195	538	538
FTSC3-118	118mils (10ga) 50ksi		230	641	641	195	538	538

3-5/8" Flat Tail™ Slide Clip (FTSC3)

	C. ITI. /	Mechanically	Mechanically ASD Allowable Loads (lbs)						
Product code	Stud Thickness / Yield Strength	Anchored to	Concentric			Eccentric			
	Tield Strength	Structure	F1 Load	F2 Load	F3 Load	F1 Load	F2 Load	F3Load	
FTSC3-97	97mils (12ga) 50ksi	(2) 1/4" Hilti Kwik HUS-EZ 2-1/2"	303	847	699	259	717	647	
FTSC3-118	118mils (10ga) 50ksi	Embedment in to 3000psi uncracked	303	847	847	259	717	717	

- FTSC3 loads based on (4) Proprietary HD Deflection Screws
- FTSC6 loads based on (6) Proprietary HD Deflection Screws

6" Flat Tail™ Slide Clip (FTSC6) Mechanically Anchored to Structure ASD Allowable Loads (lbs) Stud Thickness / Yield Strength Product code Concentric Eccentric F1 Load F2 Load F3 Load F1 Load F2 Load F3Load FTSC6-97 97mils (12ga) 50ksi 444 1383 1063 407 1051 (2) Fasteners to be designed by others 118mils (10ga) 50ksi FTSC6-118 492 2026 1439 622 1962 1629



6" FI	at Tail™	Slide C	lip (F	FTSC6)

	C. ITI: I	Mechanically	ASD Allowable Loads (lbs)						
Product code	Product code Stud Thickness / Yield Strength	Anchored to Structure	Concentric			Eccentric			
	Tield Strength		F1 Load	F2 Load	F3 Load	F1 Load	F2 Load	F3Load	
FTSC6-97	97mils (12ga) 50ksi	(2) 1/4-28 Fasteners in 3/16" steel	283	847	847	236	689	689	
FTSC6-118	118mils (10ga) 50ksi		314	931	931	257	744	744	

	. T 'IT	v CI: I	CIL	(FTCC()
6 Fla	t laıl"	" Slide	Clip	(FTSC6)

		Mechanically		AS	D Allowab	le Loads (I	bs)	
Product code	Stud Thickness / Yield Strength	Anchored to	Concentric			Eccentric		
	Tield Strength	Structure	F1 Load	F2 Load	F3 Load	F1 Load	F2 Load	F3Load
FTSC6-97	97mils (12ga) 50ksi	(2) 12-24 Fasteners	239	716	716	200	585	585
FTSC6-118	118mils (10ga) 50ksi	in 3/16" steel	256	763	763	212	616	616

6" Flat Tail™ Slide Clip (FTSC6)

	·							
		Mechanically		AS	D Allowab	le Loads (I	bs)	
Product code	Stud Thickness / Yield Strength	Anchored to	Concentric			Eccentric		
	Tield Strength	Structure	F1 Load	F2 Load	F3 Load	F1 Load	F2 Load	F3Load
FTSC6-97	97mils (12ga) 50ksi	(2) 0.157" PAFs	211	641	641	181	538	538
FTSC6-118	118mils (10ga) 50ksi	in 3/16" steel	211	641	641	181	538	538

6" Flat Tail™ Slide Clip (FTSC6)

	C. ITI'I /	Mechanically	ASD Allowable Loads (lbs)						
Product code	Stud Thickness / Yield Strength	Anchored to		Concentri	:	Eccentric			
	Tield Strength	Structure	F1 Load	F2 Load	F3 Load	F1 Load	F2 Load	F3Load	
FTSC6-97	97mils (12ga) 50ksi	(2) 1/4" Hilti Kwik HUS-EZ 2-1/2"	277	847	847	240	717	717	
FTSC6-118	118mils (10ga) 50ksi	Embedment in to 3000psi uncracked	277	847	847	240	717	717	

- FTSC3 loads based on (4) Proprietary HD Deflection Screws
- FTSC6 loads based on (6) Proprietary HD Deflection Screws

Fast Strut™

Curtain Wall/Bypass

Commonly used for large standoff conditions.

The ClarkDietrich Fast Strut™ curtain wall connector employs the FastClip™ technology for curtain wall stud attachment and is commonly used when large standoff conditions exist. Fast Strut products are available in standard lengths of 12-1/4" and 15-1/4" and custom lengths of 18," 20," 22" and 24" long to allow framing attachment well beyond the perimeter of the structural steel—or when the spandrel beams are set back from the edge of the structure. Fast Struts are attached to the underside of structural members with screws, welds or powder-actuated fasteners. Studs are plumbed and secured with propriety screws for friction-free deflection. Each clip is also embossed with fastening patterns to ensure accurate placement of fasteners.

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Coating: G90

Yield Strength: 50ksi ASTM: A653/A653M

PRODUCT DIMENSIONS

FS12: 4" × 1-1/2" × 12-1/4" **FS15**: 4" × 1-1/2" × 15-1/4"


Extended Lengths: 4" x 1-1/2" x 18," 20," 22" and 24"


ALTERNATIVE PRODUCTS

FastClip™ Slide Clip

INSTALLATION

Connections to the building can be made with screws, powder-actuated fasteners, drill-in concrete anchors or welding. Mechanical fasteners shall be equally spaced along the scored line of the 1-1/2" flange. The Fast Strut must engage the building structure a minimum of 4." When using the tabulated allowable loads indicated in the table on the opposite page, connections to the building structure must be made according to the notes. Three Proprietary Deflection Screws are used to attach the Fast Strut to the cold-formed steel framing. Screws shall be driven through the slotted holes and positioned to allow for the appropriate building deflection.





Fast Strut™ (FS12, FS15, FS18, FS20, FS22, FS24)

Product code	Thio	kness	S: (;)	Packaging
Product code	Mils (Gauge)	Design thickness (in)	Size (in)	Pcs./Carton
FS12	68mils (14ga)	0.0713	4 x 1-1/2 x 12-1/4	10
FS15	68mils (14ga)	0.0713	4 x 1-1/2 x 15-1/4	10
FS18	68mils (14ga)	0.0713	4 x 1-1/2 x 18	10
FS20	68mils (14ga)	0.0713	4 x 1-1/2 x 20	10
FS22	68mils (14ga)	0.0713	4 x 1-1/2 x 22	10
FS24	68mils (14ga)	0.0713	4 x 1-1/2 x 24	10
Custom lengths	68mils (14ga)	0.0713	per customer specs	10

Includes 55 deflection screws per carton.



U.S. Patent No. 6,688,069


Fast Strut™ FS12, FS15 and FS24 Allowable Loads (lbs)

					Me	chanically And	hored	
Stud thickness	Yield strength	Slip allowance (in)	Welded direct to structural steel	Number of anchors	PAF in steel (FS=5)	PAF in steel (FS=10)	Buildex #12-24 screws in steel	Hilti 1/4"x 1-3/4" Kwik-Cons in concrete
		0.75	546	2	546	290	546	269
22 :1 (20)	33ksi	0./5	546	3	546	343	546	_
33mils (20ga)	33KSI	1.25	546	2	513	257	546	232
		1.25	546	3	546	294	546	_
		0.75	1522	2	579	290	789	269
42 1 (10)	221 .	0.75	1522	3	686	343	963	_
43mils (18ga)	33ksi	1.25	1522	2	513	257	720	232
		1.25	1522	3	587	294	760	_
		0.75	1612	2	579	290	789	269
E 4 11 (44)	221 :	0.75	1612	3	686	343	963	_
54mils (16ga)	33ksı	33ksi	1612	2	513	257	720	232
	1.25	1612	3	587	294	760	_	
		0.75	1705	2	579	290	789	269
E 4 11 (44)	F.01 :	0.75	1705	3	686	343	963	_
54mils (16ga)	50ksi	4.05	1705	2	513	257	720	232
		1.25	1705	3	587	294	760	_
		0.75	1792	2	579	290	789	269
(0 1 (14)	221 :	0.75	1792	3	686	343	963	_
68mils (14ga)	33ksi	4.05	1792	2	513	257	720	232
		1.25	1792	3	587	294	760	_
		0.75	1978	2	579	290	789	269
	F.01 :	0.75	1978	3	686	343	963	_
68mils (14ga)	50ksi	4.05	1978	2	513	257	720	232
		1.25	1978	3	587	294	760	_
		0.75	2481	2	579	290	789	269
07 1 (10)	221 :	0.75	2481	3	686	343	963	_
97mils (12ga)	33ksi	4.05	2481	2	513	257	720	232
		1.25	2481	3	587	294	760	_
		0.75	2997	2	579	290	789	269
		0.75	2997	3	686	343	963	_
97mils (12ga)	50ksi	4.05	2997	2	513	257	720	232
		1.25	2997	3	587	294	760	_


Notes:

- 1 Except when welding, tabulated values require a minimum of 4" of structure engagement. For other conditions or technical assistance, contact ClarkDietrich at 888-437-3244.
- 2 The tabulated values for welds are based on the following weld lengths: use 4-1/2" of weld along each edge of the 1-1/2" FastStrut leg for 20, and 18 gauge, use 5-1/2" along each edge for 16 and 14 gauge, use 6-1/2" along each edge for 12 gauge. Use E70XX (min.) electrodes. (Note that the welded values may require more than 4" of structure engagement.)
- 3 Tabulated values for PAFs and Buildex screws are based on the following: fasteners are spaced at 3" o.c. (min.) when using two anchors, and 1-1/2" o.c. (min.) when using three anchors; anchors are placed 1/2" (min.) away from the edge of the building structure, and 1/2" (min.) away from edge of the Fast Strut.
- 4 Tabulated values for Hilti Kwik-Cons are based on the following: anchors are spaced at 2-3/4" o.c. (min.), anchors are placed 3/4" (min.) away from edge of building structure and 1/2" (min.) away from edge of Fast Strut. The tabulated values are based on 3000psi normal weight concrete.
- 5 For 3/4" deflection, center the propriety screws along the topmost hash mark. For 1-1/4" deflection, center the screws along the center hash mark.
- 6 Capacities listed for PAFs are based on minimum PAF requirements listed in General Note #6 on page 9.
- 7 It is the responsibility of the design professional to detail the project drawings for proper clip attachment.
- 8 Buildex is a registered trademark of Illinois Tool Works, Inc.
- 9 Hilti is a registered trademark of Hilti Aktiengeseilschaft Corporation.

TYPICAL CONSTRUCTION DETAILS







Visit our CAD Library at clarkdietrich.com to view or download construction details in .dwg, .dxf, and .pdf formats.

Fixed Universal Slip Clip

10 and 12 gauge fixed universal slip clip.

The clips are available in standard lengths of 6" and 8" in 12 and 10 gauge. They are ideal for medium to larger standoff conditions. FUS clips install quickly and provide adjustable standoff to ensure a plumb wall plane. For deflection application, proprietary heavy duty deflection screws are provided with each clip to ensure friction-free sliding.

- Eliminates shims and scabs.
- Provides vertical movement up to 1" when installed as a deflection application
- Fast, one-piece universal installation.
 No left- or right-handed clips.
- Can be used in applications where significantly higher capacities are required.
- Proprietary heavy duty deflection screws provide frictionless slip connections.

PRODUCT DIMENSIONS

Lengths: 6" or 8"

MATERIAL SPECIFICATIONS

Gauge: 12 gauge (97mils)

Design Thickness: 0.1017 inches

Gauge: 10 gauge (118mils)


Design Thickness: 0.1242 inches


Coating: G90 (Z275 hot-dipped galvanized coating)
Material: Structural Grade 50 Type H (ST50H), 50ksi

ASTM: A653/A653M, ASTM A1003

Fixed Universal Slip Clip (FUS6, FUS8)

	Thic	kness		
Product code	Mils (Gauge)	Design thickness (in)	Clip length (in)	Packaging Pcs./Box
FUS6-97	07 1 (12)	0.1017	6	10
FUS8-97	97mils (12ga)	0.1017	8	10
FUS6-118	110: - (10)	0.1242	6	10
FUS8-118	118mils (10ga)	0.1242	8	10







INSTALLATION

Connections to the building can be made with screws, welds powder-actuated fasteners. Mechanical fasteners shall be located on the embossed marks given on the scored line of the 2" flange. Attach building anchors to the structure according to the manufacturer's instructions. Anchors shall be installed through the embossments on the scored line of the clip as shown on the attached drawings. In no case shall anchors be installed more than 3/4" from the bend on the short leg of the clip. In cases of discrepancy between this information and the Design Engineer's details, the Design Engineer's details shall be followed.

For a Deflection Connection:

Attach the FUS clip to cold-formed steel framing members using proprietary #14 heavy duty deflection screws (included) through the slotted holes and position for the appropriate building deflection. For the FUS6 clip all slotted holes shall have a screw. For the FUS8 clip the (2) outer slotted holes and the (2) stacked slotted holes must have screws. For a deflection connection, screws should not be installed in any unslotted holes.

Proprietary HD Deflection Screws:

Many of the ClarkDietrich deflection clips include our proprietary heavy duty deflection fasteners that have been specifically designed to provide friction-free deflection. These fasteners eliminate drag, binding or resistance that can often occur with common fasteners. For the FUS clip, we supply a heavy duty version of the deflection screw. ClarkDietrich's Proprietary HD screws are utilized on the FUS clip only when used for a deflection condition.

Fixed	Universal :	Sli _P Cli	Capacities	DEFLECTION CONNECTIONS			
	Clip thickness	Clip length	No. of #14	Stud thickness		Capacities ((lbs)
Product code	Mils (Gauge)	(in)	screws to framing	Mils (Gauge)	In-Plane	Tension	Compression
			rraming		F1	F2	F3
				33mils (20ga)	115	922	1030
				43mils (18ga)	194	1288	1429
FUS6-97	97mils (12ga)	6	4	54mils (16ga)	280	1689	1866 2339 3318
				68mils (14ga)	443	1928	
				97mils (12ga)	780	2423	3318
				33mils (20ga)	115	922	1030
				43mils (18ga)	206	1288	1347
FUS8-97	97mils (12ga)	8	4	54mils (16ga)	306	1689	1693
				68mils (14ga)	457	1947	2283
				97mils (12ga)	769	2482	3503
				33mils (20ga)	137	1134	998
				43mils (18ga)	211	1550	1607
FUS6-118	118mils (10ga)	6	4	54mils (16ga)	291	2006	2275
				68mils (14ga)	450	2458	2812
				97mils (12ga)	779	3392	3923

33mils (20ga)

43mils (18ga)

54mils (16ga)

68mils (14ga)

97mils (12ga)



Proprietary HD Deflection Screws



Notes:

FUS8-118

- 1 Tabulated loads are based on maximum stud standoff distance of 1" from base structure.
- 2 FUS clip was tested in compliance with ICC-ES AC-261 (2019).

118 mils (10 ga)

- 3 #14 shouldered screws (proprietary) were used to attach clips to framing members.
- 4 The ultimate screw shear strength and screw tension strength for #14 screws shall be at least 3048-lbs, and 3201-lbs respectively.
- 5 The screw strength capacities are based of CFSEI Tech Note (F701-12).
- 6 Allowable loads have not been increased for seismic or wind.

998

1581

2221

2797

3987

137

240

354

536

913

1134

1550

2006

2458

3392

Product Detail









2 Drift Head-of-Wall Clip pages 50-53





3 Drift Rail and Clip Drift Headed Rail & Clip pages 54-71





Drift FastClip™ Slide Clip - 68mils (14ga)

Curtain Wall/Bypass with Drift & Vertical Deflection

Vertical and lateral building movement up to 2".

ClarkDietrich Drift FastClip™ Slide Clip 68mils (14ga) is used to attach exterior curtain-wall studs to the building structure and provide for both vertical and lateral movement. Proprietary Deflection Screws are provided with each clip for attachment to the wall studs and allow for 2" vertical deflection (1" up and down) to ensure friction-free sliding. Step bushings are provided for the connection to the structure and allow for 2" lateral deflection (1" left and right).

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Yield Strength: 50ksi

Coating: G90

ASTM: A653/A1003

PRODUCT DIMENSIONS

D-FCSC3.5: 3-3/4" x 4" x 3-1/2" long D-FCSC6: 3-3/4" x 4" x 6" long D-FCSC8: 3-3/4" x 4" x 8" long



Drift Rail and Clip




D-FCSC3.5

(2) Bushings per Clip (2) Slots & Deflection Screws per Clip



D-FCSC6

(2) Bushings per Clip (3) Slots & Deflection Screws per Clip



D-FCSC8

(2) Bushings per Clip (4) Slots & Deflection Screws per Clip

Drift FastClip™ Slide Clip (D-FCSC)

		Thic	kness		Packaging
	Product code	Mils (Gauge)	Design thickness (in)	Size (in)	Pcs./Bucket
	D-FCSC3.5-68	68mils (14ga)	0.0713	3-3/4 x 4 x 3-1/2	25
	D-FCSC6-68	68mils (14ga)	0.0713	3-3/4 x 4 x 6	25
	D-FCSC8-68	68mils (14ga)	0.0713	3-3/4 x 4 x 7-3/4	25

Packaging: D-FCSC3.5 includes (55) Proprietary Deflection Screws & (50) Bushings

D-FCSC6 includes (80) Proprietary Deflection Screws & (50) Bushings

D-FCSC8 includes (110) Proprietary Deflection Screws & (50) Bushings



Copper Bushing for 14ga Clips




Proprietary Deflection Screws (For Stud Connection)


INSTALLATION

To attach the clip to the cold-formed steel framing, two, three or four Proprietary Deflection Screws (based upon clip size), shall be driven through the slotted holes and positioned to allow for the appropriate building deflection.

Attachment to the primary structure can be made with screws, or bolt anchors. Structure attachments shall be driven through the drift bushings and the Drift FastClip TM - centered in the drift slots.



STRUCTURE CENTER CONNECTIONDrift Bushings centered in slots



STRUCTURE OFFSET CONNECTION² Drift Bushings at far end of slots

Drift FastClip™ Slide Clip (D-FCSC) Allowable Loads

ATTACHED TO MIN. 3/16" STRUCTURAL STEEL WITH (2) 1/4"-20 SCREWS

			SILLE WITH (2) 174 ZOSCKEWS				
Clin	Stud thickness	Fast	eners	Te	nsion or Compres	ssion Load Capac	ity
Clip designation	Mils (ga)			ASD		LRFD	
acsignation	(84)	to Framing	to Structure	Center (lbs)*	Offset (lbs)**	Center (lbs)*	Offset (lbs)**
	33mils (20ga) 33ksi			395	383	632	613
D-FCSC3.5 68mils (14ga)	43mils (18ga) 33ksi	(2) Proprietary Deflection Screws	(0) ((1)	579	487	926	779
	54mils (16ga) 50ksi		(2) 1/4" - 20 with Drift Bushing	612	526	979	841
	68mils (14ga) 50ksi			612	548	979	876
	97mils (12ga) 50ksi			648	548	1037	876
	33mils (20ga) 33ksi		(2) 1/4" - 20	627	509	1003	815
	43mils (18ga) 33ksi			640	534	1024	855
D-FCSC6 68mils (14ga)	54mils (16ga) 50ksi	(3) Proprietary Deflection Screws		640	541	1024	866
Oomins (14ga)	68mils (14ga) 50ksi	Deflection Screws	with Drift Bushing	667	559	1067	895
	97mils (12ga) 50ksi			667	559	1067	895
	43mils (18ga) 33ksi			597	499	955	798
D-FCSC8	54mils (16ga) 50ksi	(4) Proprietary	(2) 1/4" - 20	636	566	1018	906
68mils (14ga)	68mils (14ga) 50ksi	Deflection Screws	with Drift Bushing	671	574	1074	918
	97mils (12ga) 50ksi			671	645	1074	1032

- * Proprietary Deflection Screws centered in slots, Drift bushings centered in slots.
- ** Proprietary Deflection Screws centered in slots, Drift bushings at end of slots.
- ${\bf 1}\,$ Load capacities have not been increased for wind, seismic, or other factors.
- 2 Load Capacities include 1/8" service load limitation.
- 3 Load Capacities calculated considering (2) 1/4"-20 screws for structure connection to 3/16" steel.
- 4 Refer to ICC-ESR-3332 for allowable loads using 1/4"-20 screw fasteners with various plate connection thickness.
- 5 Proprietary Deflection Screws for framing connection and step bushings for structure connection are provided with D-FCSC clip.



Drift FastClip™ Slide Clip - 97mils (12ga)

Curtain Wall/Bypass with Drift & Vertical Deflection

Vertical and lateral building movement up to 2".

ClarkDietrich Drift FastClip™ Slide Clip 97mils (12ga) is used to attach exterior curtain-wall studs to the building structure and provide for both vertical and lateral movement. Proprietary HD Deflection Screws are provided with each clip for attachment to the wall studs and allow for 2" vertical deflection (1" up and down) to ensure friction-free sliding. Step bushings are provided for the connection to the structure and allow for 2" lateral deflection (1" left and right).



Gauge: 12 gauge (97mils)

Design Thickness: 0.1017 inches

Yield Strength: 50ksi

Coating: G90

ASTM: A653/A1003

PRODUCT DIMENSIONS

D-FCSC3.5: 3-3/4" x 4" x 3-1/2" long D-FCSC6: 3-3/4" x 4" x 6" long D-FCSC8: 3-3/4" x 4" x 8" long

ALTERNATIVE PRODUCTS

Drift Rail and Clip









D-FCSC8

Drift FastClip™ Slide Clip (D-FCSC)

			La La Carte de				
	Product code	Thic	kness		N	No. of Slots & Deflection Screws per Clip	
		Mils (Gauge)	Design thickness (in)	Size (in)	No. of Bushings per Clip		
	D-FCSC3.5-97	97mils (12ga)	0.1017	3-1/2"	2	2	
	D-FCSC6-97	97mils (12ga)	0.1017	6"	2	3	
	D-FCSC8-97	97mils (12ga)	0.1017	7-3/4"	2	4	

Packaging: 25 Clips per Bucket

D-FCSC3.5 includes (55) Proprietary HD Deflection Screws & (50) Bushings D-FCSC6 includes (80) Proprietary HD Deflection Screws & (50) Bushings D-FCSC8 includes (110) Proprietary HD Deflection Screws & (50) Bushings



Silver Bushing for 12ga Clips



Proprietary HD Deflection Screws (10ga and 12ga clips only)




INSTALLATION

To attach the clip to the cold-formed steel framing, two, three or four Proprietary HD Deflection Screws (based upon clip size), shall be driven through the slotted holes and positioned to allow for the appropriate building deflection.

Attachment to the primary structure can be made with screws, or bolt anchors. Structure attachments shall be driven through the drift bushings and the Drift FastClip $^{\text{TM}}$ - centered in the drift slots.



STRUCTURE CENTER CONNECTIONDrift Bushings centered in slots




STRUCTURE OFFSET CONNECTION² Drift Bushings at far end of slots

Drift FastClip™ Slide Clip (D-FCSC) Allowable Loads

ATTACHED TO MIN. 3/16" STRUCTURAL STEEL WITH (2) 1/4"-20 SCREWS

		•		WITH (2) 1/4 -20 SCREWS				
CI	Stud thickness	Fast	eners	Te	ension or Compre	ssion Load Capac	ity	
Clip designation	Mils (Gauge)		. c	Α	ASD		LRFD	
designation	mis (eduge)	to Framing	to Structure	Center (lbs)*	Offset (lbs)**	Center (lbs)*	Offset (lbs)**	
	33mils (20ga) 33ksi		(2) 1/4" - 20 with Drift Bushing	488	443	781	709	
D-FCSC3.5 97mils (12ga)	43mils (18ga) 33ksi	(2) Proprietary HD Deflection Screws		740	499	1183	798	
	54mils (16ga) 50ksi			877	877	1402	1402	
	68mils (14ga) 50ksi	Deflection screws		877	877	1402	1402	
	97mils (12ga) 50ksi			877	877	1402	1402	
	33mils (20ga) 33ksi		(2) 1/4" - 20 with Drift Bushing	777	592	1243	948	
	43mils (18ga) 33ksi			934	934	1494	1494	
D-FCSC6 97mils (12ga)	54mils (16ga) 50ksi	(3) Proprietary HD Deflection Screws		978	967	1564	1548	
atinis (12ga)	68mils (14ga) 50ksi	Deflection screws	With Drift Bushing	978	967	1564	1548	
	97mils (12ga) 50ksi			978	967	1564	1548	
	43mils (18ga) 33ksi			822	822	1316	1316	
D-FCSC8	54mils (16ga) 50ksi	(4) Proprietary HD	(2) 1/4" - 20	845	845	1353	1353	
97mils (12ga)	68mils (14ga) 50ksi	Deflection Screws	with Drift Bushing	845	845	1353	1353	
	97mils (12ga) 50ksi		_	845	845	1353	1353	

- * Proprietary HD Deflection Screws centered in slots, Drift bushings centered in slots.
- ** Proprietary HD Deflection Screws centered in slots, Drift bushings at end of slots.
- 1 Load capacities have not been increased for wind, seismic, or other factors.
- 2 Load capacities include 1/8" service load limitation.
- 3 Load capacities calculated considering (2) 1/4"-20 screws for structure connection to 3/16" steel.
- 4 Refer to ICC-ESR-3332 for allowable loads using 1/4"-20 screw fasteners with various plate connection thickness.
- 5 Proprietary HD Deflection Screws for framing connection and step bushings for structure connection are provided with D-FCSC clip.



Head-of-wall drift and deflection connection

Drift Head-of-Wall

Head-of-wall drift and deflection for exterior curtain wall and interior nonload-bearing walls

ClarkDietrich's Drift Head-of-wall Clips are used in deflection conditions for in-fill curtain wall assemblies and/or interior nonload-bearing partitions to provide for both vertical (deflection) and lateral (drift) movement. These clips are used in place of, or in combination with, deflection track.


The Drift Head-of-wall Clips can be attached to the underside of structural members, concrete decks or floor assemblies. Structural attachments are positioned in the center of the slot to allow building drift. The "C" shaped end of the clip is slid inside of the structural stud and not fastened allowing for vertical deflection. Studs must be cut less than full height to enable vertical movement up to 2" (1" up and down).

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils) **Design Thickness**: 0.0713 inches


Yield Strength: 50ksi

Coating: G90

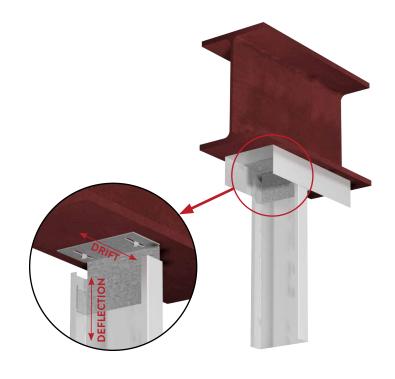

ASTM: A653/A653M For attaching 20ga (33mils), 18ga (43mils), DHOW-LG Systems or 16ga (54mils) structural studs Thickness Product code Design thickness Size (in) Packaging pcs./bucket Mils (Gauge) DHOW3-LG 3-1/2" DHOW6-LG 68mils (14ga) 0.0713 5-7/8" 25 DHOW8-LG 7-7/8"

DHOW-HO	G Systems	structural studs				
Product code	Thickness Mils (Gauge)	Design thickness	Size (in)	Packaging pcs./bucket		
DHOW3-HG			3-5/16"	25		
DHOW6-HG	68mils (14ga)	0.0713	5-11/16"			
DHOW8-HG			7-11/16"			




Patent Pending

INSTALLATION

The Drift HOW clips come in two designs. The DHOW-LG (light gauge) is designed to be installed in structural stud gauges 20ga (33mils), 18ga (43mils) or 16ga (54mils). The DHOW-HG (heavy gauge) is designed to be installed in structural stud gauges 14ga (68mils) and 12ga (97mils). Attachment to the primary structure can be made with 1/4-14 screws, or concrete anchors and shall be driven through the slotted holes and positioned in the center of the slot to allow building drift. To ensure slip, back-out the fasteners about 1/2" turn. The "C" shaped end of the clip is slid inside of the structural stud and is not fastened, which allows for vertical deflection. Drywall screws (in the stud) shall be placed no closer than 4" from the slotted leg of the clip.

Drift H	ead-of-Wa	all (DF	IOW3)	ALLOWABLE LOADS		
S.I.		Yield		ASD Allowal	ole Loads (lbs)	
Clip designation	Stud thickness Mils (Gauge)	strength	Anchors to structure	Vertical Displacement		
designation	Milis (Gauge)	(ksi)	tostructure	Center (± 1")	Offset (+2" / -0")	
	33mils (20ga)	33ksi	Anchors to be designed by others	120	90	
DHOW3-LG	43mils (18ga)	33ksi		210	130	
	54mils (16ga)	50ksi		360	210	
DHOW3-HG	68mils (14ga)	50ksi		510	260	
DHOW3-HG	97mils (12ga)	50ksi		590	360	

Drift Head-of-Wall (DHOW3) w/Fasteners ALLOWABLE LOADS ASD Allowable Loads (lbs) Yield Stud thickness Clip Anchors Vertical Displacement strength Mils (Gauge) designation to structure (ksi) Center (± 1") Offset (+2" / -0") 33mils (20ga) 33ksi 120 DHOW3-LG 43mils (18ga) 33ksi 210 130 (2) 1/4-14 Fasteners 54mils (16ga) 50ksi 360 210 in 3/16" Steel 510 68mils (14ga) 50ksi 260 DHOW3-HG 97mils (12ga) 50ksi 590 360 33mils (20ga) 33ksi 120 90 DHOW3-LG 43mils (18ga) 33ksi 210 130 (2) 1/4" Hilti Kwik HUS-EZ 54mils (16ga) 50ksi (2-1/2" Embedment in to 360 210 3000 psi cracked concrete) 68mils (14ga) 50ksi 510 260 DHOW3-HG 590 97mils (12ga) 50ksi 360





Anchors centered for

in-plane Drift



Anchors offset for in-plane Drift


- 1 Table 1 capacities represent the capacity of the clip and the stud connection.
- 2 Table 2 considers capacities when the specified connectors to the structure described in notes 3 and 4 are used.
- 3 (2) 1/4-14 Fasteners shall be used for attachment to steel structure.
- 4 (2) 1/4 Hilti Kwik HUS-EZ Anchors shall be used for attachment to concrete structure.
- 5 Capacities listed in the table/notes do not consider load adjustment for edge distance of concrete anchors. For no reduction in the listed capacities of 1/4" Hilti KWIK HUS-EZ anchors embedded 2-1/2" deep into 3000psi concrete, the following minimum edge distance shall be met:
- a 4-1/2" for uncracked concrete
- **b** 4-1/2" for cracked concrete
- **6** To minimize the torsional effects of the stud, place stud bridging 12" from the end of the stud.
- 7 Drywall screw (in stud) shall be placed no closer than 4" from the slotted leg of the clip.
- 8 Allowable loads have not been increased for wind, seismic, or other factors.
- 9 Head-of-Wall Drift clip allows up to $(\pm 1")$ of vertical displacement, and $(\pm 1")$ of drift in the plane of the wall.
 - a "Center" capacity is for the center configuration of both Drift and Vertical Displacement.
 - ${\bf b}$ "Offset" capacity is for the offset configuration of both Drift and Vertical Displacement.
 - ${f c}$ If a deflection track is used, use a 2-1/2" (min) leg track so the stud does not disengage the track.
- 10 To ensure slip
 - a Concrete fasteners shall not be driven completely flush against the connector.
 - ${\bf b}$ Structural steel fasteners -once tightened, back-out the fasteners in steel about 1/2 turn.

Head-of-wall drift and deflection connection

Drift Head-of-Wall

Drift Head-of-Wall (DHOW6) ALLOWABLE LOADS ASD Allowable Loads (lbs) Clip Stud thickness Anchors Vertical Displacement strength Mils (Gauge) designation to structure Center (± 1") Offset (+2" / -0") 33mils (20ga) 33ksi 220 196 DHOW6-LG 43mils (18ga) 33ksi 340 248 54mils (16ga) 50ksi Anchors to be designed by others 68mils (14ga) 50ksi 515 275 DHOW6-HG 97mils (12ga) 340 50ksi 625


Drift Head-of-Wall (DHOW6) w/Fasteners ALLOWABLE LOADS ASD Allowable Loads (lbs) Yield Stud thickness Clip Vertical Displacement strength designation Mils (Gauge) to structure (ksi) Offset (+2" / -0") Center (± 1") 33mils (20ga) 33ksi 220 196 DHOW6-LG 43mils (18ga) 248 33ksi 340 (2) 1/4-14 Fasteners 54mils (16ga) 50ksi 515 261 in 3/16" Steel 68mils (14ga) 50ksi 515 275 DHOW6-HG 97mils (12ga) 50ksi 625 340 33mils (20ga) 33ksi 220 196 DHOW6-LG 43mils (18ga) (2) 1/4" Hilti Kwik HUS-EZ 340 33ksi 248 54mils (16ga) (2-1/2" Embedment in to 50ksi 515 261 68mils (14ga) 50ksi 3000 psi cracked concrete) 515 275 DHOW6-HG 97mils (12ga) 625 340 50ksi

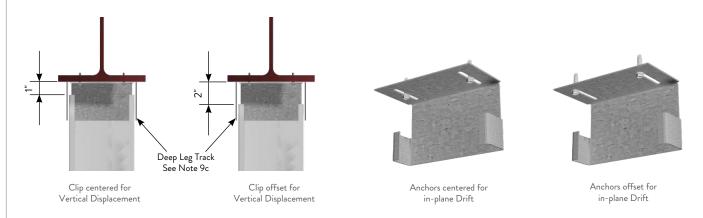

- 1 Table 1 capacities represent the capacity of the clip and the stud connection.
- 2 Table 2 considers capacities when the specified connectors to the structure described in notes 3 and 4 are used.
- 3 (2) 1/4-14 Fasteners shall be used for attachment to steel structure.
- 4 (2) 1/4 Hilti Kwik HUS-EZ Anchors shall be used for attachment to concrete structure.
- 5 Capacities listed in the table/notes do not consider load adjustment for edge distance of concrete anchors. For no reduction in the listed capacities of 1/4" Hilti KWIK HUS-EZ anchors embedded 2-1/2" deep into 3000psi concrete, the following minimum edge distance shall be met:
- a 4-1/2" for uncracked concrete
- b 4-1/2" for cracked concrete
- **6** To minimize the torsional effects of the stud, place stud bridging 12" from the end of the stud.
- 7 Drywall screw (in stud) shall be placed no closer than 4" from the slotted leg of the clip.
- 8 Allowable loads have not been increased for wind, seismic, or other factors.
- 9 Head-of-Wall Drift clip allows up to (±1") of vertical displacement, and (±1") of drift in the plane of the wall.
 - a "Center" capacity is for the center configuration of both Drift and Vertical Displacement.
 - **b** "Offset" capacity is for the offset configuration of both Drift and Vertical Displacement.
 - \boldsymbol{c} If a deflection track is used, use a 2-1/2" (min) leg track so the stud does not disengage the track.
- 10 To ensure slip,
 - a Concrete fasteners shall not be driven completely flush against the connector.
 - b Structural steel fasteners -once tightened, back-out the fasteners in steel about 1/2 turn.

Drift H	ead-of-Wa	ALLOWABLE LOADS				
		Yield		ASD Allowal	ole Loads (lbs)	
Clip designation	Stud thickness Mils (Gauge) streng	strength	Anchors to structure	Vertical Displacement		
designation		(ksi)	to structure	Center (± 1")	Offset (+2" / -0")	
	33mils (20ga)	33ksi		_	-	
DHOW8-LG	43mils (18ga)	33ksi		120	110	
	54mils (16ga)	50ksi	Anchors to be designed by others	200	160	
DHOW8-HG	68mils (14ga)	50ksi	Ŭ,	260	190	
DUOM8-HG	97mils (12ga)	50ksi		420	280	

Drift Head-of-Wall (DHOW8) w/Fasteners ALLOWABLE LOADS ASD Allowable Loads (lbs) Yield Clip designation Stud thickness Anchors Vertical Displacement strength Mils (Gauge) to structure (ksi) Center (± 1") Offset (+2" / -0") 33mils (20ga) 33ksi DHOW8-LG 43mils (18ga) 120 110 33ksi (2) 1/4-14 Fasteners 54mils (16ga) 50ksi 200 160 in 3/16" Steel 68mils (14ga) 50ksi 260 190 DHOW8-HG 97mils (12ga) 50ksi 420 280 33mils (20ga) 33ksi DHOW8-LG 43mils (18ga) 33ksi (2) 1/4" Hilti Kwik HUS-EZ 120 110 54mils (16ga) (2-1/2" Embedment in to 50ksi 200 160 68mils (14ga) 50ksi 3000 psi cracked concrete) 260 190 DHOW8-HG 97mils (12ga) 420 280 50ksi

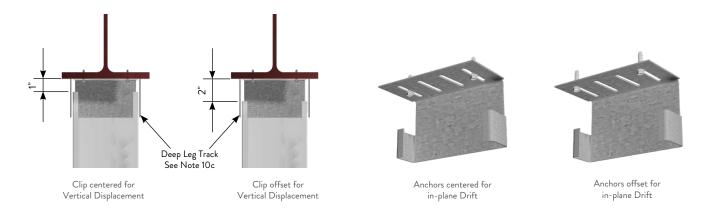

- 1 Table 1 capacities represent the capacity of the clip and the stud connection.
- 2 Table 2 considers capacities when the specified connectors to the structure described in notes 3 and 4 are used.
- 3 (2) 1/4-14 Fasteners shall be used for attachment to steel structure.
- 4 (2) 1/4 Hilti Kwik HUS-EZ Anchors shall be used for attachment to concrete structure.
- 5 For the (2) fasteners attached to the structure, each fastener shall be installed in the any two slots of the clip leg.
- 6 Capacities listed in the table/notes do not consider load adjustment for edge distance of concrete anchors. For no reduction in the listed capacities of 1/4" Hilti KWIK HUS-EZ anchors embedded 2-1/2" deep into 3000psi concrete, the following minimum edge distance shall be met:
- a 4-1/2" for uncracked concrete
- b 4-1/2" for cracked concrete
- 7 To minimize the torsional effects of the stud, place stud bridging 12" from the end of the stud.
- 8 Drywall screw (in stud) shall be placed no closer than 4" from the slotted leg of the clip.
- 9 Allowable loads have not been increased for wind, seismic, or other factors.
- 10 Head-of-Wall Drift clip allows up to (±1") of vertical displacement, and (±1") of drift in the plane of the wall.
 - a "Center" capacity is for the center configuration of both Drift and Vertical Displacement.
- $\begin{tabular}{ll} \bf b \end{tabular} \begin{tabular}{ll} \bf b \end{tabular} \begin{tabular}{ll} \bf Offset \end{tabular} \begin{tabular}{ll} \bf capacity \end{tabular} is for the offset configuration of both Drift and Vertical Displacement. \end{tabular}$
- ${f c}$ If a deflection track is used, use a 2-1/2" (min) leg track so the stud does not disengage the track.
- 11 To ensure slip,
 - a Concrete fasteners shall not be driven completely flush against the connector.
 - b Structural steel fasteners -once tightened, back-out the fasteners in steel about 1/2 turn.

Curtain Wall/Bypass with Drift and Vertical Deflection

Drift Rail and Clip

Vertical and lateral building movement

Clark Dietrich Drift Rail (DR) or Drift Headed Rail (DHR) with Drift Rail Clip (DRC), is a uniquely designed two-piece system that is used to attach curtain-wall studs to the building structure and allows for vertical and lateral movement or to be rigidly attached. The system utilizes a C-Shaped Drift Rail and distinctively designed Drift Rail Clips that rotate into position for easy installation. The multifaceted Drift Rail Clips use Proprietary Deflection Screws for attachment to the wall studs and allows for 3" vertical deflection (1-1/2" up and down) and is also designed with 1/8" holes to rigidly attach wall studs.

MATERIAL SPECIFICATIONS

Yield Strength: 50ksi

Coating: G90

ASTM: A653 / A1003

DRIFT RAIL (S)

Gauge: 12ga (97mils)

Design Thickness: 0.1017"

Min. Thickness: 0.0966"

HEADED STUD MATERIAL SPECIFICATIONS

Yield Strength: Grade 1010 through 1020, 51ksi

ASTM: A29/A108

AWS: D1.1

Dimensions: 3/8" dia. x 3" long with 3/4" head dia.

DRIFT RAIL CLIP

Gauge: 12ga (97mils)

Design Thickness: 0.1017"

Min. Thickness: 0.0966"

Gauge: 14ga (68mils)

Design Thickness: 0.0713"

Min. Thickness: 0.0677"

ALTERNATIVE PRODUCTS

Drift FastClip™ Slide Clip



Drift Rail (DR) Installation



Drift Headed Rail (DHR) Installation

DRC - 12ga Clip / 12ga Rail

Product code	Thickness Mils (Gauge)	Size (in)	No. of slots per Clip	No. of holes per clip	Drift Clips per box	Prop. Screws per box
DRC3-97	97mils (12ga)	3.3875"	2	4	25	55 or 80
DRC6-97		5.875"	4	8	25	55 or 80
DRC8-97		7.325"	4	8	25	55 or 80

DRC - 14ga Clip / 12ga Rail

Product code	Thickness Mils (Gauge)	Size (in)	No. of slots per Clip	No. of holes per clip	Drift Clips per box	Prop. Screws per box
DRC3-68	68mils (14ga)	3.3875"	2	4	25	55 or 80
DRC6-68		5.875"	4	8	25	55 or 80
DRC8-68		7.325"	4	8	25	55 or 80


Note: 12' Drift Rail(s) are individually packaged.











Drift Rail and Clip

INSTALLATION

Install the Drift Rail to minimum 3/16-in thick steel support structure using:

- Welds
- PAF fasteners
- · Self-drilling screws


Install the Drift Rail to concrete support structure using:

- Expansion anchors
- Screw anchors
- Cast In Place / Embedded (Drift Headed Rail only)

Pilot holes are provided along the length of the Drift Rail web at a spacing of 6-in on-center. (DR rail only)

Design load capacities for commonly used fasteners are tabulated in the product Design Guide and include:

- Hilti X-U Universal Knurled Shank Fasteners
- #12-24 HWH Fasteners
- Hilti 1/4" KWIK HUS-EZ anchor



With the Drift Rail or Drift Headed Rail installed on the structure, the Drift Clips can be positioned as required:

- The framing stud web must contact the flat face of the long leg of the Drift Clip.
- Note that one of the four slots in the channel portion of the Drift Clip is longer than the others.
- Tilt the Drift Clip and position it so that the longer slot initially engages one leg of the Drift Rail.
- Rotate the Drift Clip to the vertical position, engaging all four slots with the Drift Rail legs.

Connection between the Drift Clip and Framing Studs:

For bypass connections, Proprietary Deflection Screws are placed through each slotted hole of the long leg, of the
Drift Clip to the web of the stud. The required number and location of the slotted holes used to secure the stud is
determined by the required design load capacity.

• For rigid connections, self-drilling screws are placed through the pilot holes around the perimeter of the long leg of the Drift Clip to the web of the stud.

To restrict clip lateral movement (Drift) along the Drift Rail, install one of two types of stops:

- Drift Locking Angle (DRLA) is an L-shaped clip.
 - The long leg is inserted into the channel of the Drift Rail Clip,
 - The short leg is secured to the flange of the Drift Rail with a #10 self-drilling screw
- Drift Locking Clip (DRLC) is a C-shaped clip
 - The DRLC sits within the channel of the Drift Clip, and straddles the flanges of the Drift Rail.
 - The two outside legs of the DRLC are secured to each flange of the Drift Rail with a #10 self-drilling screw.



Drift Locking Angle (DRLA)



Drift Locking Clip
(DRLC)


Drift Rail and Clip - Structural Attachment Designed by Others

ATTACHMENT TO STRUCTURAL: DESIGNED BY OTHERS ATTACHMENT TO STUD: AS A DEFLECTION CONNECTION

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A DEFLECTION CONNECTION


	Stud	Framing (Connection	ASD Allowable Loads (lbs)		
Product code	Mils (Gauge)	Screw Pattern	No. of Screws	F2 (Tension)	F3 (Compression)	
	33mils (20ga)		(2) x #14	560	600	
DRC3-97	43mils (18ga)		(2) x #14	655	670	
	54mils (16ga)	See Figure	(2) x #14	1000	970	
	68mils (14ga)		(2) x #14	1085	1325	
	97mils (12ga)		(2) x #14	1085	2040	
	33mils (20ga)		(3) x #14	560	600	
	43mils (18ga)		(3) x #14	655	670	
DRC6-97	54mils (16ga)	See Figure	(3) x #14	1000	970	
	68mils (14ga)		(3) x #14	1085	1325	
	97mils (12ga)		(3) x #14	1085	2040	
	33mils (20ga)		(3) x #14	560	620	
	43mils (18ga)		(3) x #14	655	730	
DRC8-97	54mils (16ga)	See Figure	(3) x #14	1000	1060	
	68mils (14ga)		(3) x #14	1085	1340	
	97mils (12ga)		(3) x #14	1085	1965	



Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A DEFLECTION CONNECTION

	Stud	Framing (Connection	ASD Allowable Loads (lbs)		
Product code	Mils (Gauge)	Screw Pattern	No. of Screws	F2 (Tension)	F3 (Compression)	
	33mils (20ga)		(2) x #14	490	440	
DRC3-68	43mils (18ga)		(2) x #14	540	520	
	54mils (16ga)	See Figure	(2) x #14	850	870	
	68mils (14ga)		(2) x #14	850	1170	
	97mils (12ga)		(2) x #14	850	1600	
	33mils (20ga)		(3) x #14	490	440	
	43mils (18ga)		(3) x #14	540	520	
DRC6-68	54mils (16ga)	See Figure	(3) x #14	850	870	
	68mils (14ga)		(3) x #14	850	1170	
	97mils (12ga)		(3) x #14	850	1600	
	33mils (20ga)		(3) x #14	490	485	
	43mils (18ga)		(3) x #14	540	620	
DRC8-68	54mils (16ga)	See Figure	(3) x #14	850	900	
	68mils (14ga)		(3) x #14	850	1105	
	97mils (12ga)		(3) x #14	850	1710	



(3) #14 Deflection Screw Pattern Shown in a DRC6 Clip

- 1 Allowable loads (ASD) listed are for Drift Rail Clip to stud only (framing connection).
- 2 Drift Rail attachment to structure designed by others. Drift Rail attachment to the structure should occur at every 6" o.c., and each connection capacity should satisfy the design load requirement of the project. Listed Drift Rail clip load capacities must be evaluated along with clip-to-structure connection capacity to establish the governing load capacity of the assembly.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Minimum (2) x #14 shouldered screws (for DRC3) and (3) x #14 shouldered screws (for DRC6 and DRC8) must be used to secure the Drift Rail Clip for attachment to stud (#14 shouldered screws provided with each Drift Rail Clip).
- 5 It is the responsibility of the designer to properly detail connections on the contract drawings.


Drift Rail and Clip - Structural Attachment Designed by Others

ATTACHMENT TO STRUCTURAL: DESIGNED BY OTHERS ATTACHMENT TO STUD: FIXED CONNECTION W/(4)#10-16

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION


	Stud	Framing C	Connection	ASD Allowable Loads (lbs)					
Product code	Mils (Gauge)	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)		
	33mils (20ga)		(4) x #10	155	560	600	280		
	43mils (18ga)		(4) x #10	155	655	670	415		
DRC3-97	54mils (16ga)	See Figure	(4) x #10	155	1000	970	840		
	68mils (14ga)		(4) x #10	155	1085	1325	865		
	97mils (12ga)		(4) x #10	155	1085	2040	865		
	33mils (20ga)		(4) x #10	155	560	600	235		
	43mils (18ga)	See Figure	(4) x #10	155	655	670	345		
DRC6-97	54mils (16ga)		(4) x #10	155	1000	970	705		
	68mils (14ga)		(4) x #10	155	1085	1325	725		
	97mils (12ga)		(4) x #10	155	1085	2040	725		
	33mils (20ga)		(4) x #10	140	560	620	240		
	43mils (18ga)		(4) x #10	140	655	730	360		
DRC8-97	54mils (16ga)	See Figure	(4) x #10	140	1000	1060	725		
	68mils (14ga)		(4) x #10	140	1085	1340	745		
	97mils (12ga)		(4) x #10	140	1085	1965	745		



Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION

	Stud	Framing C	Connection	ASD Allowable Loads (lbs)					
Product code	Mils (Gauge)	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)		
	33mils (20ga)		(4) x #10	115	490	440	280		
	43mils (18ga)		(4) x #10	115	540	520	415		
DRC3-68	54mils (16ga)	See Figure	(4) x #10	115	850	870	740		
	68mils (14ga)		(4) x #10	115	850	1170	740		
	97mils (12ga)		(4) x #10	115	850	1600	805		
	33mils (20ga)		(4) x #10	115	490	440	235		
	43mils (18ga)		(4) x #10	115	540	520	345		
DRC6-68	54mils (16ga)	See Figure	(4) x #10	115	850	870	705		
	68mils (14ga)		(4) x #10	115	850	1170	725		
	97mils (12ga)		(4) x #10	115	850	1600	725		
	33mils (20ga)		(4) x #10	120	490	485	240		
	43mils (18ga)		(4) x #10	120	540	620	360		
DRC8-68	54mils (16ga)	See Figure	(4) x #10	120	850	900	725		
	68mils (14ga)	1	(4) x #10	120	850	1105	745		
	97mils (12ga)		(4) x #10	120	850	1710	745		



(4) #10 Screw Pattern Shown in a DRC6 Clip

- 1 Allowable loads (ASD) listed are for Drift Rail Clip to stud only (framing connection).
- 2 Drift Rail attachment to structure designed by others. Drift Rail attachment to the structure should occur at every 6" o.c., and each connection capacity should satisfy the design load requirement of the project. Listed Drift Rail clip load capacities must be evaluated along with clip-to-structure connection capacity to establish the governing load capacity of the assembly.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Minimum (4) x #10-16 screws must be used to secure the Drift Rail Clip for attachment to stud.
- 5 It is the responsibility of the designer to properly detail connections on the contract drawings.
- 6 F1 (In-Plane) loads are based on using a Drift Locking Clip (DRLC) or Drift Locking Angle (DRLA) restricting Drift Clip lateral movement.


Drift Rail and Clip - Structural Attachment Designed by Others

ATTACHMENT TO STRUCTURAL: DESIGNED BY OTHERS ATTACHMENT TO STUD: FIXED CONNECTION W/(8)#10-16

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION


Clip	Stud	Framing C	Connection	ASD Allowable Loads (lbs)					
designation	Mils (Gauge)	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)		
	20ga (33mils)		(8) x #10	155	560	600	395		
	18ga (43mils)		(8) x #10	155	655	670	585		
DRC6-97	16ga (54mils)	See Figure	(8) x #10	155	1000	970	875		
	14ga (68mils)		(8) x #10	155	1085	1325	920		
	12ga (97mils)		(8) x #10	155	1085	2040	920		
	20ga (33mils)		(8) x #10	140	560	620	375		
	18ga (43mils)		(8) x #10	140	655	730	555		
DRC8-97	16ga (54mils)	See Figure	(8) x #10	140	1000	1060	910		
	14ga (68mils)		(8) x #10	140	1085	1340	910		
	12ga (97mils)		(8) x #10	140	1085	1965	910		



Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION

Clip	Stud	Framing Connection		ASD Allowable Loads (lbs)					
designation	Mils (Gauge)	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)		
	20ga (33mils)		(8) x #10	115	490	440	395		
	18ga (43mils)		(8) x #10	115	540	520	585		
DRC6-68	16ga (54mils)	See Figure	(8) x #10	115	850	870	740		
	14ga (68mils)		(8) x #10	115	850	1170	740		
	12ga (97mils)		(8) x #10	115	850	1600	805		
	20ga (33mils)		(8) x #10	120	490	485	375		
	18ga (43mils)		(8) x #10	120	540	620	555		
DRC8-68	16ga (54mils)	See Figure	(8) x #10	120	850	900	800		
	14ga (68mils)	1	(8) x #10	120	850	1105	800		
	12ga (97mils)		(8) x #10	120	850	1710	865		



- 1 Allowable loads (ASD) listed are for Drift Rail Clip to stud only (framing connection).
- 2 Drift Rail attachment to structure designed by others. Drift Rail attachment to the structure should occur at every 6" o.c., and each connection capacity should satisfy the design load requirement of the project. Listed Drift Rail clip load capacities must be evaluated along with clip-to-structure connection capacity to establish the governing load capacity of the assembly.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- ${f 4}$ Minimum (4) x #10-16 screws must be used to secure the Drift Rail Clip for attachment to stud.
- 5 It is the responsibility of the designer to properly detail connections on the contract drawings.
- 6 F1 (In-Plane) loads are based on using a Drift Locking Clip (DRLC) or Drift Locking Angle (DRLA) restricting Drift Clip lateral movement.

(8) #10 Screw Pattern Shown in a DRC6 Clip


Drift Rail and Clip - Attachment Using (2) #12-24 Fasteners

ATTACHMENT TO STRUCTURAL STEEL: #12-24 FASTENERS ATTACHMENT TO STUD: AS A DEFLECTION CONNECTION

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A DEFLECTION CONNECTION


Clip	Stud		Framing	Connection	ASD Allov	vable Loads (lbs)
designation	Mils (Gauge)	Anchor to structure	Screw Pattern	No. of Screws	F2 (Tension)	F3 (Compression)
	33mils (20ga)			(2) x #14	560	600
	43mils (18ga)	(3) #13 341114/115 :		(2) x #14	655	670
DRC3-97	54mils (16ga)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(2) x #14	1000	970
	68mils (14ga)	to 3/10 ASTM ASO Steel		(2) x #14	1030	1325
	97mils (12ga)			(2) x #14	1030	2040
	33mils (20ga)		See Figure	(3) x #14	560	600
	43mils (18ga)	(2) #12 24 IM/I F .		(3) x #14	655	670
DRC6-97	54mils (16ga)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel		(3) x #14	1000	970
	68mils (14ga)	to 3/10 ASTM ASO Steel		(3) x #14	1030	1325
	97mils (12ga)			(3) x #14	1030	2040
	33mils (20ga)			(3) x #14	560	620
	43mils (18ga)	(2) #12 24 HWH F+		(3) x #14	655	730
DRC8-97	54mils (16ga)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(3) x #14	1000	1060
	68mils (14ga)	to 3/10 ASTM ASO Steel	_	(3) x #14	1030	1340
	97mils (12ga)			(3) x #14	1030	1965



Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A DEFLECTION CONNECTION

				OBIN	0 0211 115 1	I DEI LECTION
Clip	Stud		Framing	Connection	ASD Allov	vable Loads (lbs)
designation	Mils (Gauge)	Anchor to structure	Screw Pattern	No. of Screws	F2 (Tension)	F3 (Compression)
	33mils (20ga)			(2) x #14	490	440
	43mils (18ga)	(2) x #12-24 HWH Fasteners		(2) x #14	540	520
DRC3-68	54mils (16ga)	to 3/16" ASTM A36 Steel	See Figure	(2) x #14	850	870
	68mils (14ga)	to 3/10 ASTM A30 Steel		(2) x #14	850	1170
	97mils (12ga)			(2) x #14	850	1600
	33mils (20ga)		See Figure	(3) x #14	490	440
	43mils (18ga)	(2) #12 24 [WILE .		(3) x #14	540	520
DRC6-68	54mils (16ga)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel		(3) x #14	850	870
	68mils (14ga)	to 3/10 ASTM A30 Steel		(3) x #14	850	1170
	97mils (12ga)			(3) x #14	850	1600
	33mils (20ga)			(3) x #14	490	485
	43mils (18ga)	(2) x #12-24 HWH Fasteners		(3) x #14	540	620
DRC8-68	54mils (16ga)	to 3/16" ASTM A36 Steel	See Figure	(3) x #14	850	900
	68mils (14ga)	10 3/10 ASTM ASO Steel		(3) x #14	850	1105
	97mils (12ga)			(3) x #14	850	1710



(3) #14 Deflection Screw Pattern Shown in a DRC6 Clip

- 1 Allowable loads (ASD) listed are for Drift Rail Clip where Drift Rail is attached to 3/16" thick ASTM A36 steel using (2) x #12-24 HWH fasteners spaced 2" apart at 6" on center spacing.
- 2 (2) x #12-24 HWH fasteners must be fastened at every 6" o.c. for Drift Rail attachment to 3/16" ASTM A36 steel structure. Other fasteners may be used to achieve full clip capacity but must be designed separately.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Minimum (2) x #14 shouldered screws (for DRC3) and (3) x #14 shouldered screws (for DRC6 and DRC8) must be used to secure the Drift Rail Clip for attachment to stud (#14 shouldered screws provided with each Drift Rail Clip).
- 5 It is the responsibility of the designer to properly detail connections on the contract drawings.


Drift Rail and Clip - Attachment Using (2) #12-24 Fasteners

ATTACHMENT TO STRUCTURAL STEEL: #12-24 FASTENERS ATTACHMENT TO STUD: FIXED CONNECTION W/(4)#10-16

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION


· · · · · · · · · · · · · · · · · · ·								
Clip	Stud	A 1	Framing C	Connection		ASD Allow	able Loads (lbs)	
designation	Mils (Gauge)	Anchor to structure	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)
	33mils (20ga)			(4) x #10	155	560	600	280
DRC3-97	43mils (18ga)	(2) x #12-24 HWH		(4) x #10	155	655	670	415
	54mils (16ga)	Fasteners to 3/16"	See Figure	(4) x #10	155	1000	970	840
	68mils (14ga)	ASTM A36 Steel		(4) x #10	155	1030	1325	865
	97mils (12ga)			(4) x #10	155	1030	2040	865
	33mils (20ga)	(2) x #12-24 HWH		(4) x #10	155	560	600	235
	43mils (18ga)		See Figure	(4) x #10	155	655	670	345
DRC6-97	54mils (16ga)	Fasteners to 3/16"		(4) x #10	155	1000	970	705
	68mils (14ga)	ASTM A36 Steel		(4) x #10	155	1030	1325	725
	97mils (12ga)			(4) x #10	155	1030	2040	725
	33mils (20ga)			(4) x #10	140	560	620	240
	43mils (18ga)	(2) x #12-24 HWH		(4) x #10	140	655	730	360
DRC8-97	54mils (16ga)	Fasteners to 3/16" ASTM A36 Steel	See Figure	(4) x #10	140	1000	1060	725
	68mils (14ga)			(4) x #10	140	1030	1340	745
	97mils (12ga)			(4) x #10	140	1030	1965	745



Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION

Clip	Stud	A 1	Framing C	Framing Connection		ASD Allowable Loads (lbs)			
designation	Mils (Gauge)	Anchor to structure	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)	
	33mils (20ga)			(4) x #10	115	490	440	280	
	43mils (18ga)	(2) x #12-24 HWH		(4) x #10	115	540	520	415	
DRC3-68	54mils (16ga)	Fasteners to 3/16"	See Figure	(4) x #10	115	850	870	740	
6	68mils (14ga)	ASTM A36 Steel		(4) x #10	115	850	1170	740	
	97mils (12ga)			(4) x #10	115	850	1600	805	
	33mils (20ga)	(2) x #12-24 HWH	See Figure	(4) x #10	115	490	440	235	
	43mils (18ga)			(4) x #10	115	540	520	345	
DRC6-68	54mils (16ga)			(4) x #10	115	850	870	705	
	68mils (14ga)	ASTM A36 Steel		(4) x #10	115	850	1170	725	
	97mils (12ga)			(4) x #10	115	850	1600	725	
	33mils (20ga)			(4) x #10	120	490	485	240	
	43mils (18ga)	(2) x #12-24 HWH		(4) x #10	120	540	620	360	
DRC8-68	54mils (16ga)		See Figure	(4) x #10	120	850	900	725	
	68mils (14ga)			(4) x #10	120	850	1105	745	
	97mils (12ga)			(4) x #10	120	850	1710	745	



(4) #10 Screw Pattern Shown in a DRC6 Clip

- 1 Allowable loads (ASD) listed are for Drift Rail Clip where Drift Rail is attached to 3/16" thick ASTM A36 steel using (2) x #12-24 HWH fasteners spaced 2" apart at 6" on center spacing.
- 2 (2) x #12-24 HWH fasteners must be fastened at every 6" o.c. for Drift Rail attachment to 3/16" ASTM A36 steel structure. Other fasteners may be used to achieve full clip capacity but must be designed separately.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Where fasteners are loaded simultaneously, load interaction must be considered following fastener manufacturer guidelines.
- 5 Use linear load interaction for combined loading conditions.
- 6 Minimum (4) x #10-16 screws must be used to secure the Drift Rail Clip for attachment to stud.
- 7 It is the responsibility of the designer to properly detail connections on the contract drawings.
- 8 F1 (In-Plane) loads are based on using a Drift Locking Clip (DRLC) or Drift Locking Angle (DRLA) restricting Drift Clip lateral movement.


Drift Rail and Clip - Attachment Using (2) #12-24 Fasteners

ATTACHMENT TO STRUCTURAL STEEL: #12-24 FASTENERS
ATTACHMENT TO STUD: FIXED CONNECTION W/(8)#10-16

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION


Clip	Stud			Connection		ASD Allowable Loads (lbs)			
designation	Mils (Gauge)	Anchor to structure	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)	
	33mils (20ga) 43mils (18ga)			(8) x #10	155	560	600	395	
		(2) x #12-24 HWH		(8) x #10	155	655	670	585	
	54mils (16ga)	Fasteners to 3/16"	See Figure	(8) x #10	155	1000	970	875	
	68mils (14ga)	ASTM A36 Steel		(8) x #10	155	1030	1325	920	
	97mils (12ga)			(8) x #10	155	1030	2040	920	
	33mils (20ga)			(8) x #10	140	560	620	375	
	43mils (18ga)	(2) x #12-24 HWH		(8) x #10	140	655	730	555	
DRC8-97	54mils (16ga)	Fasteners to 3/16"	See Figure	(8) x #10	140	1000	1060	910	
	68mils (14ga)	ASTM A36 Steel		(8) x #10	140	1030	1340	910	
	97mils (12ga)			(8) x #10	140	1030	1965	910	



Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION

Clip	Stud			Framing Connection		ASD Allowable Loads (lbs)			
designation	Mils (Gauge)	Anchor to structure	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)	
	33mils (20ga)			(8) x #10	115	490	440	395	
DRC6-68	43mils (18ga)	(2) x #12-24 HWH		(8) x #10	115	540	520	585	
	54mils (16ga)		See Figure	(8) x #10	115	850	870	740	
	68mils (14ga)			(8) x #10	115	850	1170	740	
	97mils (12ga)			(8) x #10	115	850	1600	805	
	33mils (20ga)			(8) x #10	120	490	485	375	
	43mils (18ga)	(2) x #12-24 HWH		(8) x #10	120	540	620	555	
DRC8-68	54mils (16ga)	Fasteners to 3/16"	See Figure	(8) x #10	120	850	900	800	
	68mils (14ga)	ASTM A36 Steel		(8) x #10	120	850	1105	800	
	97mils (12ga)			(8) x #10	120	850	1710	865	



(8) #10 Screw Pattern Shown in a DRC6 Clip

- 1 Allowable loads (ASD) listed are for Drift Rail Clip where Drift Rail is attached to 3/16" thick ASTM A36 steel using (2) x #12-24 HWH fasteners spaced 2" apart at 6" on center spacing.
- 2 (2) x #12-24 HWH fasteners must be fastened at every 6" o.c. for Drift Rail attachment to 3/16" ASTM A36 steel structure. Other fasteners may be used to achieve full clip capacity but must be designed separately.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Where fasteners are loaded simultaneously, load interaction must be considered following fastener manufacturer guidelines.
- 5 Use linear load interaction for combined loading conditions.
- 6 Minimum (8) x #10-16 screws must be used to secure the Drift Rail Clip for attachment to stud.
- 7 It is the responsibility of the designer to properly detail connections on the contract drawings.
- 8 F1 (In-Plane) loads are based on using a Drift Locking Clip (DRLC) or Drift Locking Angle (DRLA) restricting Drift Clip lateral movement.


Drift Rail and Clip - Attachment Using (2) Hilti X-U Fasteners

ATTACHMENT TO STRUCT. STEEL: HILTI X-U FASTENERS ATTACHMENT TO STUD: AS A DEFLECTION CONNECTION

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A DEFLECTION CONNECTION


Clip	Stud	A 1	Framing	g Connection	ASD Allowal	ole Loads (lbs)
designation	Mils (Gauge)	Anchor to structure	Screw Pattern	No. of Screws	F2 (Tension)	F3 (Compression)
	33mils (20ga)			(2) x #14	560	600
DRC3-97 5	43mils (18ga)	(2) x Hilti X-U Universal Knurled		(2) x #14	655	670
	54mils (16ga)	Shank Fasteners	See Figure	(2) x #14	1000	970
	68mils (14ga)	to 3/16" ASTM A36 Steel		(2) x #14	1070	1325
	97mils (12ga)			(2) x #14	1070	2040
	33mils (20ga)		See Figure	(3) x #14	560	600
	43mils (18ga)	(2) x Hilti X-U Universal Knurled		(3) x #14	655	670
DRC6-97	54mils (16ga)			(3) x #14	1000	970
	68mils (14ga)	to 3/16" ASTM A36 Steel		(3) x #14	1070	1325
	97mils (12ga)			(3) x #14	1070	2040
	33mils (20ga)			(3) x #14	560	620
	43mils (18ga)	(2) x Hilti X-U Universal Knurled		(3) x #14	655	730
DRC8-97	54mils (16ga)	Shank Fasteners to 3/16" ASTM A36 Steel	See Figure	(3) x #14	1000	1060
	68mils (14ga)			(3) x #14	1070	1340
	97mils (12ga)			(3) x #14	1070	1965



Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A DEFLECTION CONNECTION

Clip	Stud		Framing	Connection	ASD Allowal	ole Loads (lbs)
designation	Mils (Gauge)	Anchor to structure	Screw Pattern	No. of Screws	F2 (Tension)	F3 (Compression)
	33mils (20ga)			(2) x #14	490	440
	43mils (18ga)	(2) x Hilti X-U Universal Knurled		(2) x #14	540	520
DRC3-68	54mils (16ga)	Shank Fasteners	See Figure	(2) x #14	850	870
	68mils (14ga)	to 3/16" ASTM A36 Steel		(2) x #14	850	1170
	97mils (12ga)			(2) x #14	850	1600
	33mils (20ga)		See Figure	(3) x #14	490	440
	43mils (18ga)			(3) x #14	540	520
DRC6-68	54mils (16ga)			(3) x #14	850	870
	68mils (14ga)	to 3/16" ASTM A36 Steel		(3) x #14	850	1170
	97mils (12ga)			(3) x #14	850	1600
	33mils (20ga)			(3) x #14	490	485
	43mils (18ga)	(2) x Hilti X-U Universal Knurled		(3) x #14	540	620
DRC8-68	54mils (16ga)		See Figure	(3) x #14	850	900
	68mils (14ga)			(3) x #14	850	1105
	97mils (12ga)			(3) x #14	850	1710



(3) #14 Deflection Screw Pattern Shown in a DRC6 Clip

- 1 Allowable loads (ASD) listed are for Drift Rail Clip where Drift Rail is attached to 3/16" thick ASTM A36 steel using (2) x Hilti X-U Universal Knurled Shank fasteners spaced 2" apart at 6" on center spacing.
- 2 (2) x Hilti X-U Universal Knurled Shank fasteners must be fastened at every 6" o.c. for Drift Rail attachment to 3/16" ASTM A36 steel structure. Other fasteners may be used to achieve full clip capacity but must be designed separately.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Minimum (2) x #14 shouldered screws (for DRC3) and (3) x #14 shouldered screws (for DRC6 and DRC8) must be used to secure the Drift Rail Clip for attachment to stud (#14 shouldered screws provided with each Drift Rail Clip).
- 5 It is the responsibility of the designer to properly detail connections on the contract drawings.


Drift Rail and Clip - Attachment Using (2) Hilti X-U Fasteners

ATTACHMENT TO STRUCT. STEEL: HILTI X-U FASTENERS ATTACHMENT TO STUD: FIXED CONNECTION W/(4)#10-16

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION


					03.	OSING CEIL AS ATTALD COMMECTION			
Clip	Stud		Framing C	Connection	ASD Allowable Loads (lbs)				
designation	Mils (Gauge)	Anchor to structure	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)	
	33mils (20ga)	(2) x Hilti X-U	See Figure	(4) x #10	155	560	600	280	
	43mils (18ga)	Universal Knurled		(4) x #10	155	655	670	415	
DRC3-97	54mils (16ga)	Shank Fasteners		(4) x #10	155	1000	970	840	
	68mils (14ga)	to 3/16" ASTM	_	(4) x #10	155	1070	1325	865	
	97mils (12ga)	A36 Steel		(4) x #10	155	1070	2040	865	
	33mils (20ga)	(2) x Hilti X-U	See Figure	(4) x #10	155	560	600	235	
	43mils (18ga)	Universal Knurled		(4) x #10	155	655	670	345	
DRC6-97	54mils (16ga)	Shank Fasteners		(4) x #10	155	1000	970	705	
	68mils (14ga)	to 3/16" ASTM		(4) x #10	155	1070	1325	725	
	97mils (12ga)	A36 Steel		(4) x #10	155	1070	2040	725	
	33mils (20ga)	(2) x Hilti X-U		(4) x #10	140	560	620	240	
	43mils (18ga)	Universal Knurled		(4) x #10	140	655	730	360	
DRC8-97	54mils (16ga)	Shank Fasteners	See Figure	(4) x #10	140	1000	1060	725	
	68mils (14ga)	to 3/16" ASTM		(4) x #10	140	1070	1340	745	
	97mils (12ga)	A36 Steel		(4) x #10	140	1070	1965	745	



Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION

	. tuil ullu		USING CLIP AS A FIXED CONNECTION					
Clip	Stud		Framing C	Connection		ASD Allow	able Loads (lbs)	
designation	Mils (Gauge)	Anchor to structure	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)
	33mils (20ga)	(2) x Hilti X-U		(4) x #10	115	490	440	280
	43mils (18ga)	Universal Knurled		(4) x #10	115	540	520	415
DRC3-68	54mils (16ga)	Shank Fasteners	See Figure	(4) x #10	115	850	870	740
	68mils (14ga)	to 3/16" ASTM		(4) x #10	115	850	1170	740
	97mils (12ga)	A36 Steel		(4) x #10	115	850	1600	805
	33mils (20ga)	(2) x Hilti X-U	See Figure	(4) x #10	115	490	440	235
	43mils (18ga)	Universal Knurled		(4) x #10	115	540	520	345
DRC6-68	54mils (16ga)	Shank Fasteners		(4) x #10	115	850	870	705
	68mils (14ga)	to 3/16" ASTM	_	(4) x #10	115	850	1170	725
	97mils (12ga)	A36 Steel		(4) x #10	115	850	1600	725
	33mils (20ga)	(2) x Hilti X-U		(4) x #10	120	490	485	240
	43mils (18ga)	Universal Knurled		(4) x #10	120	540	620	360
DRC8-68	54mils (16ga)	Shank Fasteners	See Figure	(4) x #10	120	850	900	725
	68mils (14ga)		0	(4) x #10	120	850	1105	745
	97mils (12ga)	A36 Steel		(4) x #10	120	850	1710	745



(4) #10 Screw Pattern Shown in a DRC6 Clip

- 1 Allowable loads (ASD) listed are for Drift Rail Clip where Drift Rail is attached to 3/16" thick ASTM A36 steel using (2) x Hilti X-U Universal Knurled Shank fasteners spaced 2" apart at 6" on center spacing.
- 2 (2) x Hilti X-U Universal Knurled Shank fasteners must be fastened at every 6" o.c. for Drift Rail attachment to 3/16" ASTM A36 steel structure. Other fasteners may be used to achieve full clip capacity but must be designed separately.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Where fasteners are loaded simultaneously, load interaction must be considered following fastener manufacturer guidelines.
- 5 Use linear load interaction for combined loading conditions.
- 6 Minimum (4) x #10-16 screws must be used to secure the Drift Rail Clip for attachment to stud.
- 7 It is the responsibility of the designer to properly detail connections on the contract drawings.
- 8 F1 (In-Plane) loads are based on using a Drift Locking Clip (DRLC) or Drift Locking Angle (DRLA) restricting Drift Clip lateral movement.


Drift Rail and Clip - Attachment Using (2) Hilti X-U Fasteners

ATTACHMENT TO STRUCT. STEEL: HILTI X-U FASTENERS ATTACHMENT TO STUD: FIXED CONNECTION W/(8)#10-16

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION


Clip	Stud	A L	Framing C	onnection	ASD Allowable Loads (lbs)				
designation	designation Mils (Gauge)	Anchor to structure	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)	
	43mils (18ga) Universal k	(2) x Hilti X-U		(8) x #10	155	560	600	395	
		Universal Knurled		(8) x #10	155	655	670	585	
DRC6-97		Shank Fasteners	See Figure	(8) x #10	155	1000	970	875	
	68mils (14ga)	1010 1		(8) x #10	155	1070	1325	920	
	97mils (12ga)			(8) x #10	155	1070	2040	920	
	33mils (20ga)	(2) x Hilti X-U		(8) x #10	140	560	620	375	
	43mils (18ga)	Universal Knurled		(8) x #10	140	655	730	555	
DRC8-97	54mils (16ga)	Shank Fasteners	See Figure	(8) x #10	140	1000	1060	910	
	68mils (14ga)	to 3/16" ASTM	_	(8) x #10	140	1070	1340	910	
	97mils (12ga)	A36 Steel		(8) x #10	140	1070	1965	910	



Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION

Clip	Stud Mils (Gauge)		Framing Connection		ASD Allowable Loads (lbs)				
designation		Anchor to structure	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)	
	33mils (20ga)	(2) x Hilti X-U	See Figure	(8) x #10	115	490	440	395	
	43mils (18ga)	Universal Knurled		(8) x #10	115	540	520	585	
	54mils (16ga)	to 3/16" ASTM		(8) x #10	115	850	870	740	
	68mils (14ga)			(8) x #10	115	850	1170	740	
	97mils (12ga)			(8) x #10	115	850	1600	805	
	33mils (20ga)	(2) x Hilti X-U		(8) x #10	120	490	485	375	
	43mils (18ga)	Universal Knurled		(8) x #10	120	540	620	555	
DRC8-68	54mils (16ga)	Shank Fasteners	See Figure	(8) x #10	120	850	900	800	
	68mils (14ga)	to 3/16" ASTM		(8) x #10	120	850	1105	800	
	97mils (12ga)	A36 Steel		(8) x #10	120	850	1710	865	



(8) #10 Screw Pattern Shown in a DRC6 Clip

Notes

- 1 Allowable loads (ASD) listed are for Drift Rail Clip where Drift Rail is attached to 3/16" thick ASTM A36 steel using (2) x Hilti X-U Universal Knurled Shank fasteners spaced 2" apart at 6" on center spacing.
- 2 (2) x Hilti X-U Universal Knurled Shank fasteners must be fastened at every 6" o.c. for Drift Rail attachment to 3/16" ASTM A36 steel structure. Other fasteners may be used to achieve full clip capacity but must be designed separately.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Where fasteners are loaded simultaneously, load interaction must be considered following fastener manufacturer guidelines.
- 5 Use linear load interaction for combined loading conditions.
- 6 Minimum (8) x #10-16 screws must be used to secure the Drift Rail Clip for attachment to stud.
- ${f 7}$ It is the responsibility of the designer to properly detail connections on the contract drawings.
- 8 F1 (In-Plane) loads are based on using a Drift Locking Clip (DRLC) or Drift Locking Angle (DRLA) restricting Drift Clip lateral movement.

The technical content of this literature is effective 01/03/24 and supersedes all previous information.


Drift Rail and Clip - Attachment Using (1) 1/4" Hilti KWIK HUS-EZ

ATTACHMENT TO CONCRETE: 1/4" HILTI KWIK HUS-EZ ATTACHMENT TO STUD: AS A DEFLECTION CONNECTION

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A DEFLECTION CONNECTION


Clip	Stud		Framing (Connection	ASD Allowal	le Loads (lbs)
designation	Mils (Gauge)	Anchor to structure	Screw Pattern	No. of Screws	F2 (Tension)	F3 (Compression)
	33mils (20ga)			(2) x #14	560	600
	43mils (18ga)	(1) x 1/4" Hilti KWIK	See Figure	(2) x #14	655	670
DRC3-97	54mils (16ga)	HUS-EZ @ 6" o.c.		(2) x #14	1000	970
	68mils (14ga)	(3000psi uncracked concrete)		(2) x #14	1045	1325
	97mils (12ga)			(2) x #14	1045	2040
	33mils (20ga)		See Figure	(3) x #14	560	600
	43mils (18ga)	(1) x 1/4" Hilti KWIK		(3) x #14	655	670
DRC6-97	54mils (16ga)	HUS-EZ @ 6" o.c.		(3) x #14	1000	970
	68mils (14ga)	(3000psi uncracked concrete)		(3) x #14	1045	1325
	97mils (12ga)			(3) x #14	1045	2040
	33mils (20ga)			(3) x #14	560	620
	43mils (18ga)	(1) x 1/4" Hilti KWIK		(3) x #14	655	730
DRC8-97	54mils (16ga)	HUS-EZ @ 6" o.c.	See Figure	(3) x #14	1000	1060
	68mils (14ga)	(3000psi uncracked concrete)		(3) x #14	1045	1340
	97mils (12ga)			(3) x #14	1045	1965



Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A DEFLECTION CONNECTION

Clip	Stud		Framing C	Connection	ASD Allowal	ble Loads (lbs)
designation	Mils (Gauge)	Anchor to structure	Screw Pattern	No. of Screws	F2 (Tension)	F3 (Compression)
	33mils (20ga)			(2) x #14	490	440
	43mils (18ga)	(1) x 1/4" Hilti KWIK	See Figure	(2) x #14	540	520
DRC3-68	54mils (16ga)	HUS-EZ @ 6" o.c.		(2) x #14	850	870
	68mils (14ga)	(3000psi uncracked concrete)		(2) x #14	850	1170
	97mils (12ga)			(2) x #14	850	1600
	33mils (20ga)		See Figure	(3) x #14	490	440
	43mils (18ga)	(1) x 1/4" Hilti KWIK		(3) x #14	540	520
DRC6-68	54mils (16ga)	HUS-EZ @ 6" o.c.		(3) x #14	850	870
	68mils (14ga)	(3000psi uncracked concrete)		(3) x #14	850	1170
	97mils (12ga)			(3) x #14	850	1600
	33mils (20ga)			(3) x #14	490	485
	43mils (18ga)	(1) x 1/4" Hilti KWIK		(3) x #14	540	620
DRC8-68	54mils (16ga)	HUS-EZ @ 6" o.c.	See Figure	(3) x #14	850	900
	68mils (14ga)	(3000psi uncracked concrete)	Ü	(3) x #14	850	1105
	97mils (12ga)			(3) x #14	850	1710



(3) #14 Deflection Screw Pattern Shown in a DRC6 Clip

- 1 Allowable loads (ASD) listed are for Drift Rail Clip where Drift Rail is attached to 3000psi uncracked concrete using (1) x 1/4" Hilti X KWIK HUS-EZ anchor only.
- 2 (1) x 1/4" Hilti KWIK HUS-EZ anchors (nom. embedment depth of 2-1/2", 3000psi uncracked concrete) should be fastened at every 6" o.c. for Drift Rail attachment to structure. Other anchors may be used to achieve full clip capacity but must be designed separately.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Minimum (2) x #14 shouldered screws (for DRC3) and (3) x #14 shouldered screws (for DRC6 and DRC8) must be used to secure the Drift Rail Clip for attachment to stud (#14 shouldered screws provided with each Drift Rail Clip).
- 5 It is the responsibility of the designer to properly detail connections on the contract drawings.


Drift Rail and Clip - Attachment Using (1) 1/4" Hilti KWIK HUS-EZ

ATTACHMENT TO CONCRETE: 1/4" HILTI KWIK HUS-EZ ATTACHMENT TO STUD: FIXED CONNECTION W/(4)#10-16

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION


			OSING CENT NO HIT INCO CONNECTION						
Clip	Stud	Anchor to structure	Framing C	Connection	ASD Allowable Loads (lbs)				
designation	Mils (Gauge)		Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)	
	33mils (20ga)	(1) x 1/4" Hilti KWIK		(4) x #10	155	560	600	280	
	43mils (18ga)			(4) x #10	155	655	670	415	
DRC3-97	54mils (16ga)	HUS-EZ @ 6" o.c. (3000psi uncracked	See Figure	(4) x #10	155	1000	970	840	
	68mils (14ga)	concrete)		(4) x #10	155	1045	1325	865	
	97mils (12ga)	concrete)		(4) x #10	155	1045	2040	865	
	33mils (20ga)	(1) x 1/4" Hilti KWIK HUS-EZ @ 6" o.c. (3000psi uncracked concrete)	See Figure	(4) x #10	155	560	600	235	
	43mils (18ga)			(4) x #10	155	655	670	345	
DRC6-97	54mils (16ga)			(4) x #10	155	1000	970	705	
	68mils (14ga)			(4) x #10	155	1045	1325	725	
	97mils (12ga)			(4) x #10	155	1045	2040	725	
	33mils (20ga)	(4) 4 / 4 // 1 1:1:1:1 12/4 / 112		(4) x #10	140	560	620	240	
	43mils (18ga)	(1) x 1/4" Hilti KWIK		(4) x #10	140	655	730	360	
DRC8-97	54mils (16ga)	HUS-EZ @ 6" o.c. (3000psi uncracked concrete)	See Figure	(4) x #10	140	1000	1060	725	
	68mils (14ga)			(4) x #10	140	1045	1340	745	
	97mils (12ga)			(4) x #10	140	1045	1965	745	



Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION

Clip	Stud Mils (Gauge)	Anchor to structure	Framing C	Framing Connection		ASD Allowable Loads (lbs)				
designation			Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)		
	33mils (20ga)	(4) 4/4// 12/ 12/4///		(4) x #10	115	490	440	280		
	43mils (18ga)	(1) x 1/4" Hilti KWIK		(4) x #10	115	540	520	415		
DRC3-68 54mils (16ga) 68mils (14ga) 97mils (12ga)	HUS-EZ @ 6" o.c. (3000psi uncracked	See Figure	(4) x #10	115	850	870	740			
	68mils (14ga)	concrete)	_	(4) x #10	115	850	1170	740		
	97mils (12ga)	concrete)		(4) x #10	115	850	1600	805		
	33mils (20ga)	(1) x 1/4" Hilti KWIK HUS-EZ @ 6" o.c. (3000psi uncracked concrete)	See Figure	(4) x #10	115	490	440	235		
	43mils (18ga)			(4) x #10	115	540	520	345		
DRC6-68	54mils (16ga)			(4) x #10	115	850	870	705		
	68mils (14ga)			(4) x #10	115	850	1170	725		
	97mils (12ga)			(4) x #10	115	850	1600	725		
	33mils (20ga)	(4) 4 / 4" 121. 2 1214 / 112		(4) x #10	120	490	485	240		
	43mils (18ga)	(1) x 1/4" Hilti KWIK HUS-EZ @ 6" o.c.		(4) x #10	120	540	620	360		
DRC8-68	54mils (16ga)	(3000psi uncracked concrete)	See Figure	(4) x #10	120	850	900	725		
	68mils (14ga)			(4) x #10	120	850	1105	745		
	97mils (12ga)			(4) x #10	120	850	1710	745		



(4) #10 Screw Pattern Shown in a DRC6 Clip

- 1 Allowable loads (ASD) listed are for Drift Rail Clip where Drift Rail is attached to 3000psi uncracked concrete using (1) x 1/4" Hilti KWIK HUS-EZ anchor only.
- 2 (1) x 1/4" Hilti KWIK HUS-EZ anchors (nom. embedment depth of 2-1/2", 3000psi uncracked concrete) should be fastened at every 6" o.c. for Drift Rail attachment to structure. Other anchors may be used to achieve full clip capacity but must be designed separately.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Where anchors are loaded simultaneously, load interaction must be considered following anchor manufacturer guidelines.
- 5 Use linear load interaction for combined loading conditions.
- 6 Minimum (4) x #10-16 screws must be used to secure the Drift Rail Clip for attachment to stud.
- 7 It is the responsibility of the designer to properly detail connections on the contract drawings.
- 8 F1 (In-Plane) loads are based on using a Drift Locking Clip (DRLC) or Drift Locking Angle (DRLA) restricting Drift Clip lateral movement.


Drift Rail and Clip - Attachment Using (1) 1/4" Hilti KWIK HUS-EZ

ATTACHMENT TO CONCRETE: 1/4" HILTI KWIK HUS-EZ ATTACHMENT TO STUD: FIXED CONNECTION W/(8)#10-16

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION


CI.	6 1		Framing (Connection	051	ASD Allowable Loads (Ibs)			
Clip designation	Stud Mils (Gauge)	Anchor to structure			F1 (In-Plane)		F3 (Compression)	F4 (Shear)	
43mils (18ga) DRC6-97 54mils (16ga)	33mils (20ga)			(8) x #10	155	560	600	395	
	43mils (18ga)	(I) x I/4 Hilti KWIK		(8) x #10	155	655	670	585	
	54mils (16ga)	(2000 psi up assalvad	See Figure	(8) x #10	155	1000	970	875	
	68mils (14ga)			(8) x #10	155	1045	1325	920	
	97mils (12ga)			(8) x #10	155	1045	2040	920	
	33mils (20ga)	(4) 4/4// 12/ 12/4///		(8) x #10	140	560	620	375	
	43mils (18ga)	(I) x I/4 Hilti KWIK		(8) x #10	140	655	730	555	
DRC8-97	54mils (16ga)	HUS-EZ @ 6" o.c. (3000psi uncracked	See Figure	(8) x #10	140	1000	1060	910	
	68mils (14ga)	concrete)		(8) x #10	140	1045	1340	910	
	97mils (12ga)			(8) x #10	140	1045	1965	910	



Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION

Clip	Stud		Framing C	Connection	ASD Allowable Loads (lbs)				
designation Mils (Gauge)	Mils (Gauge)	Anchor to structure	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)	
43mils (18ga DRC6-68 54mils (16ga	33mils (20ga)	(4) 4/4// 12/ 12/4///		(8) x #10	115	490	440	395	
	43mils (18ga)	(I) x I/4 Hilti KWIK	See Figure	(8) x #10	115	540	520	585	
	54mils (16ga)	concrete)		(8) x #10	115	850	870	740	
	68mils (14ga)			(8) x #10	115	850	1170	740	
	97mils (12ga)			(8) x #10	115	850	1600	805	
	33mils (20ga)	(4) 4/4" 121.: 1214/112		(8) x #10	120	490	485	375	
	43mils (18ga)	(1) x 1/4" Hilti KWIK		(8) x #10	120	540	620	555	
DRC8-68	54mils (16ga)	HUS-EZ @ 6" o.c. (3000psi uncracked	See Figure	(8) x #10	120	850	900	800	
	68mils (14ga)	concrete)		(8) x #10	120	850	1105	800	
	97mils (12ga)			(8) x #10	120	850	1710	865	



(8) #10 Screw Pattern Shown in a DRC6 Clip

- 1 Allowable loads (ASD) listed are for Drift Rail Clip where Drift Rail is attached to 3000psi uncracked concrete using (1) x 1/4" Hilti KWIK HUS-EZ anchor only.
- 2 (1) x 1/4" Hilti KWIK HUS-EZ anchors (nom. embedment depth of 2-1/2", 3000psi uncracked concrete) should be fastened at every 6" o.c. for Drift Rail attachment to structure. Other anchors may be used to achieve full clip capacity but must be designed separately.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Where anchors are loaded simultaneously, load interaction must be considered following anchor manufacturer guidelines.
- 5 Use linear load interaction for combined loading conditions.
- 6 Minimum (8) x #10-16 screws must be used to secure the Drift Rail Clip for attachment to stud.
- **7** It is the responsibility of the designer to properly detail connections on the contract drawings.
- 8 F1 (In-Plane) loads are based on using a Drift Locking Clip (DRLC) or Drift Locking Angle (DRLA) restricting Drift Clip lateral movement.


Drift Headed Rail and Clip - Cast In Place

ATTACHMENT TO STRUCTURE: CAST IN PLACE
ATTACHMENT TO STUD: AS A DEFLECTION CONNECTION

Drift Headed Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A DEFLECTION CONNECTION


Clip	Stud	Framing (Connection	ASD Allowable Loads (lbs)			
designation	Mils (Gauge)	Screw Pattern	No. of Screws	F2 (Tension)	F3 (Compression)		
	33mils (20ga)		(2) x #14	560	600		
	43mils (18ga)		(2) x #14	655	670		
DRC3-97	54mils (16ga)	See Figure	(2) x #14	1000	970		
	68mils (14ga)	Ŭ	(2) x #14	1085	1325		
	97mils (12ga)		(2) x #14	1085	2040		
	33mils (20ga)		(3) x #14	560	600		
	43mils (18ga)		(3) x #14	655	670		
DRC6-97	54mils (16ga)	See Figure	(3) x #14	1000	970		
	68mils (14ga)		(3) x #14	1085	1325		
	97mils (12ga)		(3) x #14	1085	2040		
	33mils (20ga)		(3) x #14	560	620		
	43mils (18ga)		(3) x #14	655	730		
DRC8-97	54mils (16ga)	See Figure	(3) x #14	1000	1060		
	68mils (14ga)		(3) x #14	1085	1340		
	97mils (12ga)		(3) x #14	1085	1965		



Drift Headed Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A DEFLECTION CONNECTION

Clip	Stud	Framing (Connection	ASD Allowable Loads (lbs) F2 (Tension) F3 (Compression)				
designation	Mils (Gauge)	Screw Pattern	No. of Screws	F2 (Tension)	F3 (Compression)			
	33mils (20ga)		(2) x #14	490	440			
	43mils (18ga)		(2) x #14	540	520			
DRC3-68	54mils (16ga)	See Figure	(2) x #14	850	870			
	68mils (14ga)		(2) x #14	850	1170			
	97mils (12ga)		(2) x #14	850	1600			
	33mils (20ga)		(3) x #14	490	440			
	43mils (18ga)		(3) x #14	540	520			
DRC6-68	54mils (16ga)	See Figure	(3) x #14	850	870			
	68mils (14ga)		(3) x #14	850	1170			
	97mils (12ga)		(3) x #14	850	1600			
	33mils (20ga)		(3) x #14	490	485			
	43mils (18ga)		(3) x #14	540	620			
DRC8-68	54mils (16ga)	See Figure	(3) x #14	850	900			
	68mils (14ga)		(3) x #14	850	1105			
	97mils (12ga)		(3) x #14	850	1710			



- 1 Allowable loads (ASD) listed are for Drift Rail Clip to stud only (framing connection).
- 2 Maximum tension on DHR-97 anchor should not exceed 1,600 lbs ASD. In tension and shear, the strength of the DHR-97 anchor itself should be considered. The weld does not need to be considered in tension or shear as the load table and 1,600 lbs ASD tension maximum are inclusive of the strength of the welds. Designers must check Drift Headed Rail (DHR-97) tension and shear anchorage capacity in concrete per ACI 318 based on actual edge distance and concrete compressive strength.
- **3** Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Minimum (2) x #14 shouldered screws (for DRC3) and (3) x #14 shouldered screws (for DRC6 and DRC8) must be used to secure the Drift Rail Clip for attachment to stud (#14 shouldered screws provided with each Drift Rail Clip).
- 5 It is the responsibility of the designer to properly detail connections on the contract drawings.


Drift Headed Rail and Clip - Cast In Place

ATTACHMENT TO STRUCTURE: CAST IN PLACE ATTACHMENT TO STUD: FIXED CONNECTION W/(4) #10-16

Drift Headed Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS **USING CLIP AS A FIXED CONNECTION**


Clip	Stud gauge	Framing C	Connection		ASD Allowa	ble Loads (lbs)	
designation	(mils)	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)
	20ga (33mils)		(4) x #10	155	560	600	280
	18ga (43mils)		(4) x #10	155	655	670	415
DRC3-97	16ga (54mils)	See Figure	(4) x #10	155	1000	970	840
	14ga (68mils)		(4) x #10	155	1085	1325	865
	12ga (97mils)		(4) x #10	155	1085	2040	865
	20ga (33mils)		(4) x #10	155	560	600	235
	18ga (43mils)	See Figure	(4) x #10	155	655	670	345
DRC6-97	16ga (54mils)		(4) x #10	155	1000	970	705
	14ga (68mils)		(4) x #10	155	1085	1325	725
	12ga (97mils)		(4) x #10	155	1085	2040	725
	20ga (33mils)		(4) x #10	140	560	620	240
	18ga (43mils)		(4) x #10	140	655	730	360
DRC8-97	16ga (54mils)	See Figure	(4) x #10	140	1000	1060	725
	14ga (68mils)		(4) x #10	140	1085	1340	745
	12ga (97mils)		(4) x #10	140	1085	1965	745



Drift Headed Rail and Clip - 14ga Clip / 12ga Rail ALLOWABLE DRIFT RAIL CLIP LUADS USING CLIP AS A FIXED CONNECTION

ALLOWABLE DRIFT RAIL CLIP LOADS

			•			JOING CLIP AS	A FIXED COL
Clip	Stud gauge	Framing C	Connection		ASD Allowal	ole Loads (lbs)	
designation	(mils)	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)
	20ga (33mils)		(4) x #10	115	490	440	280
	18ga (43mils)		(4) x #10	115	540	520	415
DRC3-68	16ga (54mils)	See Figure	(4) x #10	115	850	870	740
	14ga (68mils)		(4) x #10	115	850	1170	740
	12ga (97mils)		(4) x #10	115	850	1600	805
	20ga (33mils)		(4) x #10	115	490	440	235
	18ga (43mils)		(4) x #10	115	540	520	345
DRC6-68	16ga (54mils)	See Figure	(4) x #10	115	850	870	705
	14ga (68mils)		(4) x #10	115	850	1170	725
	12ga (97mils)		(4) x #10	115	850	1600	725
	20ga (33mils)		(4) x #10	120	490	485	240
	18ga (43mils)		(4) x #10	120	540	620	360
DRC8-68	16ga (54mils)	See Figure	(4) x #10	120	850	900	725
	14ga (68mils)		(4) x #10	120	850	1105	745
	12ga (97mils)		(4) x #10	120	850	1710	745



- 1 Allowable loads (ASD) listed are for Drift Rail Clip to stud only (framing connection).
- 2 Maximum tension on DHR-97 anchor should not exceed 1,600 lbs ASD. In tension and shear, the strength of the DHR-97 anchor itself should be considered. The weld does not need to be considered in tension or shear as the load table and 1,600 lbs ASD tension maximum are inclusive of the strength of the welds. Designers must check Drift Headed Rail (DHR-97) tension and shear anchorage capacity in concrete per ACI 318 based on actual edge distance and concrete compressive strength.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Minimum (4) x #10-16 screws must be used to secure the Drift Rail Clip for attachment to stud.
- 5 It is the responsibility of the designer to properly detail connections on the contract drawings.
- 6 F1 (In-Plane) loads are based on using a Drift Locking Clip (DRLC) or Drift Locking Angle (DRLA) restricting Drift Clip lateral movement.


Drift Headed Rail and Clip - Cast In Place

ATTACHMENT TO STRUCTURE: CAST IN PLACE
ATTACHMENT TO STUD: FIXED CONNECTION W/(8)#10-16

Drift Headed Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION


Clip	Stud gauge	Framing C	Connection		ASD Allowab	ole Loads (Ibs)	
designation	(mils)	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)
	20ga (33mils)		(8) x #10	155	560	600	395
	18ga (43mils)		(8) x #10	155	655	670	585
DRC6-97	16ga (54mils)	See Figure	(8) x #10	155	1000	970	875
	14ga (68mils)		(8) x #10	155	1085	1325	920
	12ga (97mils)		(8) x #10	155	1085	2040	920
	20ga (33mils)		(8) x #10	140	560	620	375
	18ga (43mils)		(8) x #10	140	655	730	555
DRC8-97	16ga (54mils)	See Figure	(8) x #10	140	1000	1060	910
	14ga (68mils)		(8) x #10	140	1085	1340	910
	12ga (97mils)		(8) x #10	140	1085	1965	910



Drift Headed Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS USING CLIP AS A FIXED CONNECTION

Clip	Stud gauge	Framing C	Connection		ASD Allowal	le Loads (lbs)	
designation	(mils)	Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)
	20ga (33mils)		(8) x #10	115	490	440	395
	18ga (43mils)		(8) x #10	115	540	520	585
DRC6-68	16ga (54mils)	See Figure	(8) x #10	115	850	870	740
	14ga (68mils)		(8) x #10	115	850	1170	740
	12ga (97mils)		(8) x #10	115	850	1600	805
	20ga (33mils)		(8) x #10	120	490	485	375
	18ga (43mils)		(8) x #10	120	540	620	555
DRC8-68	16ga (54mils)	See Figure	(8) x #10	120	850	900	800
	14ga (68mils)		(8) x #10	120	850	1105	800
	12ga (97mils)		(8) x #10	120	850	1710	865




(8) #10 Screw Pattern Shown in a DRC6 Clip

- 1 Allowable loads (ASD) listed are for Drift Rail Clip to stud only (framing connection).
- 2 Maximum tension on DHR-97 anchor should not exceed 1,600 lbs ASD. In tension and shear, the strength of the DHR-97 anchor itself should be considered. The weld does not need to be considered in tension or shear as the load table and 1,600 lbs ASD tension maximum are inclusive of the strength of the welds. Designers must check Drift Headed Rail (DHR-97) tension and shear anchorage capacity in concrete per ACI 318 based on actual edge distance and concrete compressive strength.
- **3** Allowable loads have not been increased for wind, seismic, or other factors.
- ${f 4}$ Minimum (4) x #10-16 screws must be used to secure the Drift Rail Clip for attachment to stud.
- 5 It is the responsibility of the designer to properly detail connections on the contract drawings.
- 6 F1 (In-Plane) loads are based on using a Drift Locking Clip (DRLC) or Drift Locking Angle (DRLA) restricting Drift Clip lateral movement.

Product Detail













3 Extended Uni-Clip™ with Anchor Holes pages 78-79





4 Extended SwiftClip™ $\mathsf{LE}\text{-}\mathsf{Series}^{\scriptscriptstyle\mathsf{TM}}$





5 SwiftClip™ L-Series™ Support Clip





6 EasyClip U-Series™ Clip Angle page 89





FastBridge[™] Clip pages 96-97





B H-Series™ Universal Header Hanger pages 98-99



¶ EasyClip S-Series™ Support Clip pages 90-91





10 HDSC Header Bracket

pages 172-175





Header Cripple Stud Clip page 184





EasyClip™ A-Series™ End Clip pages 92-93





13 ClarkDietrich Holdown and Holdown Plate pages 100-107




14 EasyClip D- and T-Series™ **Anchor Clips**

pages 94-95









ClarkDietrich Moment Clip pages 108-109





16 ClarkDietrich Pony Wall (Heavy & Lite)

pages 110-117





17 Universal Bypass Clip pages 80-85





Uni-Clip™ End Clip

For numerous rigid framing connections and conditions, including two-axis loading, shear and tension.

Clark Dietrich's Uni-Clip™ end clip is a universal framing clip used to attach and support numerous rigid framing conditions. The Uni-Clip framing clip has a stiffened corner that provides superior design values. Embossed fastening patterns ensure easy, accurate placement of screws or powder-actuated fasteners. Designed to transfer large horizontal and vertical loads, this clip is ideal for most rigid connections, including shear, tension and two-axis loading.

ALTERNATIVE PRODUCTS

EasyClip[™] D-Series[™] Anchor Clip EasyClip T-Series[™] Tall Anchor Clip EasyClip E-Series[™] Support Clip Universal Bypass Clip

PRODUCT DIMENSIONS

3-1/2" x 1-1/2" x 4-1/2"

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)


Design Thickness: 0.0713 inches

Coating: G90

Yield Strength: 50ksi ASTM: A653/A653M

INSTALLATION


Uni-Clip end clips are attached to cold-formed steel framing members using #10 minimum self-drilling screws driven through the clip holes into the steel framing. Follow the required fastener and anchor placement patterns to achieve the allowable load. Connections to the primary building frame can be made with powder-actuated fasteners, screws or welds per design requirement.

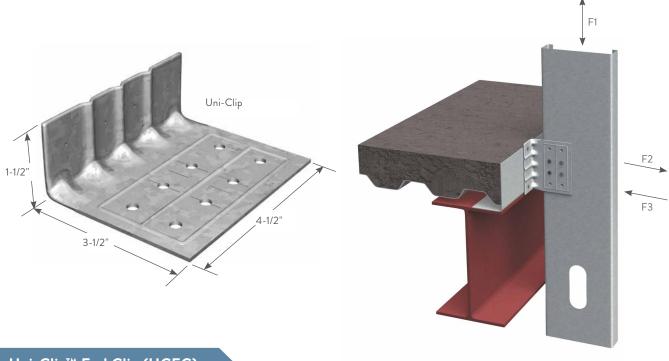

Uni-Clip™ End Clip (UCEC)

	Thi	ickness	Size	Packaging
Product code	Mils (Gauge)	Design thickness (in)	(in)	Pcs./Carton
UCEC	68mils (14ga)	0.0713	3-1/2 x 1-1/2 x 4-1/2	25

U.S. Patent No. 6,688,069

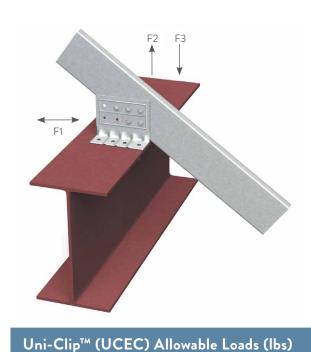

Location Options with (4) Screws







Option A

Option B

Option C






Location Options with (8) Screws

Location Options with (2) Anchors

					Nu	mber/C	Configu	ration o	f Screw	s to Sti	ıd Fram	ning		
Anchor	Stud thickness	No.	8	3 Screw	s	4 Scre	ws (Op	tion A)	4 Scre	ws (Op	tion B)	4 Scre	ws (Op	tion C)
type	and yield strength	structure	F1	F2	F3	F1	F2	F3	F1	F2	F3	F1	F2	F3
20	22 :1 (20)	2	529	1121	1121	192	561	561	177	561	561	272	561	561
elf-Drilling Steel	33mils (20ga) 33ksi	3	529	1121	1121	192	561	561	177	561	561	272	561	561
ہِ ہ	33831	4	529	1121	1121	192	561	561	177	561	561	272	561	561
self-D Steel	42:I- (10)	2	784	1227	1664	285	832	832	263	832	832	4 Screws (Option F1 F2 F2 F2 F61	832	
0) _	43mils (18ga) 33ksi	3	784	1664	1664	285	832	832	263	832	832	404	832	832
Tek 5 3/16	33831	4	784	1664	1664	285	832	832	263	832	832	404	832	832
	54mils (16ga)	2	1105	1227	1889	402	920	1172	371	1172	1172	569	1172	1172
2-2 ws	33ksi	3	1105	1841	1889	402	1172	1172	371	1172	1172	569	1172	1172
Buildex #12-24 Screws to	JJKSI	4	1105	2345	1889	402	1172	1172	371	1172	1172	569	1172	1172
	54mils (16ga)	2	1370	1227	1889	568	920	1417	523	1227	1209	804	Screws (Option C F1 F2 F3 272 561 561 272 561 561 272 561 561 272 561 561 272 561 561 274 832 832 275 875 875 875 875 875 875 875 875 875 8	1655
Ť	50ksi	3	1560	1841	1889	568	1380	1417	523	1655	1209	804		
a	JOKSI	4	1560	2454	1889	568	1655	1417	523	1655	1209		1655	1655
	33mils (20ga)	2	529	511	1121	192	383	561	177	511	561			
	33ksi	3	529	767	1121	192	561	561	177	561	561			
*	33K3i	4	529	1022	1121	192	561	561	177	561	561			
Steel*	43mils (18ga)	2	784	511	1664	285	383	832	263	511	832	-		
, S	33ksi	3	784	767	1664	285	575	832	263	767	832	-		
3/16"		4	784	1022	1664	285	767	832	263	832	832	_	F2 F3 561 561 561 561 561 561 832 832 832 832 1172 1172 1172 1172 1227 1655 1655 1655 1655 1655 561 561 561 561 561 561 561 561 561 561 511 832 767 832 832 832 767 1172 767 1172 767 1172 511 1655 767 1655 767 1655	
to 3	54mils (16ga)	2	1105	511	1889	402	383	1172	371	511	1172			
Ē.	33ksi	3	1105	767	1889	402	575	1172	371	767	1172			
PAF	001131	4	1105	1022	1889	402	767	1172	371	1022	1172		-	
	54mils (16ga)	2	1117	511	1889	568	383	1417	523	511	1209		-	
	50ksi	3	1560	767	1889	568	575	1417	523	767	1209			
		4	1560	1022	1889	568	767	1417	523	1022	1209	804	1022	1655



- 1 The 1/3 stress increase for wind shall not be used.
- 2 Attach the Uni-Clip to the stud framing using Buildex #10-16 (min.) self-drilling screws.
- 3 When using 2 anchors, use the outermost marks on the short leg of the clips for anchor placement.
- 4 Attach building anchors to the structure according to the manufacturer's instructions. Anchors shall be installed through the embossments on the scored line of the 1-1/2" leg of the clip.
- 5 When using #12-24 for clips that have load combinations of F1, F2 and F3, use a linear interaction for combinations of F1 and F3, and a squared interaction for combinations of F1 and F2. When using PAFs, use a linear interaction for combinations of F1 and F3, and for combinations of F1 and F2.
- 6 Capacities listed for PAFs are based on minimum PAF requirements listed in General Note #6 on page 9.
- 7 It is the responsibility of the design professional to detail the project drawings for proper clip installation.
- **8** For connections to concrete, or other technical assistance, contact ClarkDietrich at 888-437-3244.
- 9 Buildex is a registered trademark of Illinois Tool Works Inc.



Location Options with (3) Anchors



Location Options with (3) Anchors



Location Options with (4) Anchors

Extended Uni-Clip™

The Extended Uni-Clip™ connects exterior studs to the primary structure of the building, while resisting horizontal and vertical loads.

Clark Dietrich's Extended Uni-ClipTM rigid framing clip is used to attach exterior wall studs to the structure of the building. Designed to resist horizontal and vertical loads, the extended rigid clips install easily with screws, powder-actuated fasteners, or welds. This clip is ideal for all medium and large standoff conditions.

ALTERNATIVE PRODUCTS

Universal Bypass Clip

PRODUCT DIMENSIONS

6" Extended Uni-Clip: 1-7/8" x 4-7/8" x 6" 8" Extended Uni-Clip: 1-7/8" x 4-7/8" x 8" 10" Extended Uni-Clip: 1-7/8" x 4-7/8" x 10" 12" Extended Uni-Clip: 1-7/8" x 4-7/8" x 12"

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)


Design Thickness: 0.0713 inches

Coating: G90

Yield Strength: 50 ksi **ASTM:** A653/A653M

INSTALLATION


Attach the Extended Uni-Clip rigid clips to coldformed steel framing members using #12 minimum self-drilling screws driven through the clip holes into the steel framing. Follow the required fastener placement patterns to achieve the allowable load. Connections to the primary building frame can also be made with powder-actuated fasteners or welds per design requirement.





Extended Uni-Clip™ (UXRC)


Product	Thic	kness	Size	Packaging
code	Mils (Gauge)	Design thickness (in)	(in)	Pcs./ Bucket
UXRC6	68mils (14ga)	0.0713	1-7/8 x 4-7/8 x 6	25
UXRC8	68mils (14ga)	0.0713	1-7/8 x 4-7/8 x 8	25
UXRC10	68mils (14ga)	0.0713	1-7/8 x 4-7/8 x 10	25
LIXRC12	68mils (1/1ga)	0.0713	1-7/8 - 1-7/8 - 12	25

















8" UXRC Screw Pattern-2" Offset







8" UXRC Screw Pattern—4" Offset

Extended Uni-Clip™ (UXRC) Allowable Loads (KIPS)

		•							0" E	tended Un	: CI:-						
Base	Stud	Stud						2" (o ⊑x)ffset	tenaea On	і-Сіір					4" Offset	
connection	thickness	Fy		F1 Loa	d (kips)				d (kips)			F3 Loa	d (kins)			3 Load (kip	
	gauge (mils)	(ksi)	4 screws		8 screws	10 screws	4 screws			10 screws	4 screws			10 screws			
	33mils (20ga)	33	0.381	0.453	0.453	0.453	0.754	1.131	1.508	1.884	0.310	0.435	0.572	0.686	0.214	0.306	0.363
347.11	43mils (18ga)	33	0.453	0.453	0.453	0.453	1.122	1.683	2.243	2.278	0.462	0.647	0.851	1.022	0.318	0.456	0.540
Weld	54mils (16ga)	33	0.453	0.453	0.453	0.453	1.577	2.278	2.278	2.278	0.649	0.909	1.196	1.436	0.447	0.640	0.759
(Fillet/Flare Groove)	54mils (16ga)	50	0.453	0.453	0.453	0.453	2.278	2.278	2.278	2.278	0.938	1.313	1.728	2.075	0.645	0.925	1.097
Groove	68mils (14ga)	50	0.453	0.453	0.453	0.453	2.278	2.278	2.278	2.278	1.098	1.538	2.022	2.278	0.756	1.083	1.284
	97mils (12ga)	50	0.453	0.453	0.453	0.453	2.278	2.278	2.278	2.278	1.098	1.538	2.022	2.278	0.756	1.083	1.284
	33mils (20ga)	33	0.301	0.301	0.301	0.301	0.754	1.131	1.256	1.256	0.310	0.435	0.572	0.686	0.214	0.306	0.363
	43mils (18ga)	33	0.301	0.301	0.301	0.301	1.122	1.256	1.256	1.256	0.462	0.647	0.851	1.022	0.318	0.456	0.540
(4) #12-24	54mils (16ga)	33	0.301	0.301	0.301	0.301	1.256	1.256	1.256	1.256	0.649	0.909	1.196	1.436	0.447	0.640	0.759
(3/16" steel)	54mils (16ga)	50	0.301	0.301	0.301	0.301	1.256	1.256	1.256	1.256	0.938	1.313	1.728	1.864	0.645	0.925	1.097
	68mils (14ga)	50	0.301	0.301	0.301	0.301	1.256	1.256	1.256	1.256	1.098	1.538	1.864	1.864	0.756	1.083	1.284
	97mils (12ga)	50	0.301	0.301	0.301	0.301	1.256	1.256	1.256	1.256	1.098	1.538	1.864	1.864	0.756	1.083	1.284
	33mils (20ga)	33	0.301	0.301	0.301	0.301	0.754	0.875	0.875	0.875	0.310	0.435	0.572	0.686	0.214	0.306	0.363
	43mils (18ga)	33	0.301	0.301	0.301	0.301	0.875	0.875	0.875	0.875	0.462	0.647	0.851	1.022	0.318	0.456	0.540
(4) Hilti X-U	54mils (16ga)	33	0.301	0.301	0.301	0.301	0.875	0.875	0.875	0.875	0.649	0.909	1.196	1.436	0.447	0.640	0.759
(3/16" steel)	54mils (16ga)	50	0.301	0.301	0.301	0.301	0.875	0.875	0.875	0.875	0.938	1.313	1.728	1.864	0.645	0.925	1.097
	68mils (14ga)	50	0.301	0.301	0.301	0.301	0.875	0.875	0.875	0.875	1.098	1.538	1.864	1.864	0.756	1.083	1.284
	97mils (12ga)	50	0.301	0.301	0.301	0.301	0.875	0.875	0.875	0.875	1.098	1.538	1.864	1.864	0.756	1.083	1.284
	33mils (20ga)	33	0.301	0.301	0.301	0.301	0.360	0.360	0.360	0.360	0.310	0.435	0.572	0.686	0.214	0.306	0.363
(4) Hilti X-U	43mils (18ga)	33	0.301	0.301	0.301	0.301	0.360	0.360	0.360	0.360	0.462	0.647	0.747	0.747	0.318	0.456	0.540
(1" embedment	54mils (16ga)	33	0.301	0.301	0.301	0.301	0.360	0.360	0.360	0.360	0.649	0.747	0.747	0.747	0.447	0.640	0.747
in 3000psi	54mils (16ga)	50	0.301	0.301	0.301	0.301	0.360	0.360	0.360	0.360	0.747	0.747	0.747	0.747	0.645	0.747	0.747
concrete)	68mils (14ga)	50	0.301	0.301	0.301	0.301	0.360	0.360	0.360	0.360	0.747	0.747	0.747	0.747	0.747	0.747	0.747
	97mils (12ga)	50	0.301	0.301	0.301	0.301	0.360	0.360	0.360	0.360	0.747	0.747	0.747	0.747	0.747	0.747	0.747
(2) Kwik-Cons II	33mils (20ga)	33	0.301	0.301	0.301	0.301	0.754	0.922	0.922	0.922	0.310	0.435	0.572	0.686	0.214	0.306	0.363
(1-3/4"	43mils (18ga)	33	0.301	0.301	0.301	0.301	0.922	0.922	0.922	0.922	0.462	0.647	0.851	1.022	0.318	0.456	0.540
embedment	54mils (16ga)	33	0.301	0.301	0.301	0.301	0.922	0.922	0.922	0.922	0.649	0.909	1.160	1.160	0.447	0.640	0.759
in 3000psi	54mils (16ga)	50	0.301	0.301	0.301	0.301	0.922	0.922	0.922	0.922	0.938	1.160	1.160	1.160	0.645	0.925	1.097
concrete)	68mils (14ga)	50	0.301	0.301	0.301	0.301	0.922	0.922	0.922	0.922	1.098	1.160	1.160	1.160	0.756	1.083	1.160
	97mils (12ga)	50	0.301	0.301	0.301	0.301	0.922	0.922	0.922	0.922	1.098	1.160	1.160	1.160	0.756	1.083	1.160

 $6\rlap,"10\rlap,"$ and $12\rlap,"$ tables are available at clark dietrich.com.

- 1 Capacities listed in the table/notes assume that no load reductions are required for spacing or edge distance of Hilti X-U pins in steel, Kwik-Cons, or screws. Load reductions are enforced for spacing or edge distance of Hilti X-U in concrete.
- 2 Weld capacities are calculated for 2" long weld assuming 1" from the edges on the outer radius of the bend.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 The F1 values are calculated based on the moment capacity of the clip cross section.
- 5 Capacities are based on the use of #12 screws to clip-stud interface.
- 6 The embedment depth of Kwik-Cons in 3000psi normal weight concrete is 1-3/4." The embedment depth of Hilti X-U in 3000psi normal weight concrete is 1."
- 7 The Hilti X-U pins and #12-24 screws are embedded in 3/16" structural steel.
- 8 Torsional effects are considered on screw group for F3 allowable loads.
- 9 Use a linear interaction equation for connections involving any combination of F1, F2, and F3.
- 10 Hilti is a registered trademark of the Hilti Akfiengeseilchaft Corporation.
- 11 Hilti X-U PAFs shown in table may not be substituted without prior approval from ClarkDietrich Engineering Services.

Extended Uni-Clip™ w/Anchor Holes

The Extended Uni-Clip™ connects exterior studs to the primary structure of the building, while resisting horizontal and vertical loads.

ClarkDietrich's UXRC6-HD 68mils (14ga) rigid framing clip is used to attach exterior wall studs to the structure of the building. This clip is ideal for all medium and large standoff conditions and designed to resist horizontal and vertical loads. (1) 5/8" hole in the short leg of the clip allows for a 1/2" concrete anchor to be attached to the slab. (2) 3/8" holes allow 1/4" anchors.

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Coating: G90

Yield Strength: 50 ksi ASTM: A653/A653M


INSTALLATION

Attach the Extended Uni-Clip rigid clips to cold-formed steel framing members using #12 minimum self-drilling screws driven through the clip holes into the steel framing. Follow the required fastener placement patterns to achieve the allowable load. Attachement to the structure concrete slab can be made with (1) 1/2" or (2) 1/4" bolt anchors. Anchor connection design and edge distance requirements must be approved by a design professional before installation.




PRODUCT DIMENSIONS

6" Extended Uni-Clip: 1-1/2" x 4-1/4" x 6"

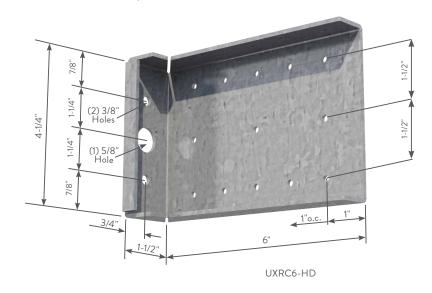

	Extende	d Uni-Clip ^T	M (UXRC6-	HD)				
	Product	Thic	kness	Size	Packaging Pcs./			
Pro	code	Mils (Gauge)	Design thickness (in)	(in)	Pcs./ Bucket			
	UXRC6-HD	68mils (14ga)	0.0713	1-1/2 x 4-1/4 x 6	25			





UXRC6-HD Screw Pattern

Extende	ed Uni-Cl	ip™ (UXRC6-HD) Allow	vable Load	s		ANCHOR DES	IGN BY OTHERS	;	
Product name	Stud thickness			F1 I	ASD Allowable Loads (lb.) F1 Load F2 Load F					
i roddet name	Mils (Gauge)	(ksi)	to Structure	w/4 #12-14	w/6 #12-14	w/4 #12-14	w/6 #12-14	w/4 #12-14	w/6 #12-14	
	33mils (20ga)	33		165	165	754	1131	361	471	
LIVDC(LID	43mils (18ga)	33		232	232	1122	1428*	537	701	
UXRC6-HD	54mils (16ga)	50	Anchors to be	405	405	1428*	1428*	1091	1423	
	68mils (14ga)	50	designed by others	527	527	1568*	1568*	1488	1600	
	97mils (12ga)	50		809	809	1667*	1667*	1488	1908	

^{*} Capacities governed by 1/8" service load criteria.

Extende	ed Uni-Cl	ip™ (UXRC6-HD) Allow	able Load	S		CONSIDERING	ANCHOR CAP	ACITIES	
		Stud				ASD Allowal	ole Loads (lb.)			
Product name	Stud thickness Mils (Gauge)	fy	Mechanically Anchored to Structure	F1 I	Load	F2	F2 Load		F3 Load	
	Milis (Gauge)	(ksi)	Structure	w/4 #12-14	w/6 #12-14	w/4 #12-14	w/6 #12-14	w/4 #12-14	w/6 #12-14	
	33mils (20ga)	33		165	165	754	1131	351	471	
	43mils (18ga)	33	(1) 1/2" Hilti KWIK Bolt TZ ² (3000 psi uncracked concrete)	232	232	1122	1199	502	682	
	54mils (16ga)	50		405	405	1199	1199	983	1280	
	68mils (14ga)	50		527	527	1339	1339	1336	1413	
UXRC6-HD	97mils (12ga)	50		809	809	1339	1339	1488	1628	
14ga (68mils)	33mils (20ga)	33		141	141	754	1131	361	471	
_	43mils (18ga)	33	(2) 1/4" Hilti KWIK HUS-EZ ³	207	207	1122	1403	537	701	
	54mils (16ga)	50		397	397	1403	1403	1091	1423	
	68mils (14ga)	50	(3000 psi uncracked concrete)	484	484	1403	1403	1488	1600	
	97mils (12ga)	50		803	803	1403	1403	1488	1838	

- 1 Table-1 contains the allowable load capacity of the clip and the screw connection to the CFS stud. When the mechanical anchors between the clip and the support structure are designed by others, pull-over shall be included in the evaluation of F2 loads, and bearing shall be included in the evaluation of F3 loads.
- 2 Table-2 considers capacities listed in Notes 3 and 4 (below) when the specified connectors to the structure are used.
- 3 When using 1/2" Hilti KWIK Bolt TZ anchor (nominal embedment depth of 2-3/8") into 3000psi concrete, anchor capacity shall be limited to:
- a Tension capacity/anchor: 1509-lbs (uncracked concrete) and 1069-lbs (cracked concrete)
- **b** Shear capacity/anchor: 1628-lbs (uncracked concrete) and 1153-lbs (cracked concrete)
- 4 When using 1/4" Hillti KWIK HUS-EZ anchor (nominal embedment depth of 2-1/2")into 3000psi concrete, anchor capacity shall be limited to:
- a Tension capacity/anchor: 752-lbs (uncracked concrete) and 374-lbs (cracked concrete)
- **b** Shear capacity/anchor: 919-lbs (uncracked concrete) and 651-lbs (cracked concrete)
- 5 Connector capacities listed in Note 4 utilize load adjustment/reduction (anchor spacing) factors of 0.72 for tension and 0.60 for shear as per 2016 Hilti Anchor Fastening Technical Guide (see Hilti Table 6 and 7 under section 3.3.6.3).
- 6 Where anchors are loaded simultaneously in tension and shear, interaction must be considered following anchor manufacturer guidelines.
- 7 Capacities listed in the table/notes did not consider load adjustment for edge distance of anchors. For no reduction in the listed capacities, the following requirements needed to be met for the concrete surface where the clip attaches:
 - a When using 1/2" Hilti KWIK Bolt TZ anchor embedded 2-3/8" deep into 3000psi concrete, minimum edge distance shall be:
 - i) 5-1/2" for uncracked concrete;
 - ii) 4-1/8" for cracked concrete
- b When using 1/4" Hilti KWIK HUS-EZ anchors embedded 2-1/2" deep into 3000psi concrete, minimum edge distance shall be:
 - i) 4-1/2" for uncracked concrete
 - ii) 4-1/2" for cracked concrete
- 8 Other anchors may be used to achieve the full clip capacity but must be designed separately.
- 9 Allowable loads have not been increased for wind, seismic, or other factors.
- 10 Hilti is a registered trademark of Hilti Aktiengeseilschaft Corporation.
- 11 It is the responsibility of the designer to properly detail connections on the contract drawings.

Universal Bypass Clip

Provides either a rigid connection or vertical building movement up to 3"

Universal Bypass Clips are used to attach exterior curtain wall studs to the building structure and provide either a rigid connection or deflecting connection for vertical building movement independent of the cold-formed steel framing.

The clips are available in standard lengths of 6", 8", 10" and 12" and are ideal for medium to larger standoff conditions. Universal Bypass Clips install quickly with screws, welds or powder-actuated fasteners, and provide adjustable standoff to ensure a plumb wall plane. For deflection application, proprietary deflection screws are provided with each clip to ensure friction-free sliding.

- · Eliminates shims and scabs.
- Provides vertical movement up to 3" (1-1/2" up and 1-1/2"down) when installed as a deflection application.
- · Specially designed to simplify welding installation.
- Fast, one-piece universal installation.
 No left or right handed clips.
- Proprietary deflection screws provide frictionless slip connections. One bag (80 screws) included.

ALTERNATIVE PRODUCTS

FastClip[™] Slide Clip Extended FastClip[™] Slide Clip Extended Uni-Clip[™]

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Gauge: 12 gauge (97mils)


Design Thickness: 0.1017 inches


Yield Strength: Structural Grade 50 Type H (ST50H), 50ksi (340 MPa)


Coating: G90 (Z275) hot-dipped galvanized coating


ASTM: A653, A1003

Product code	Mils (Gauge)	Design thickness	Size (in)	Pcs/Bucket
UBC6-68	68mils (14ga)	0.0713	1-7/8" x 6" x 4-7/8"	25
UBC8-68	68mils (14ga)	0.0713	1-7/8" x 8" x 4-7/8"	25
UBC10-68	68mils (14ga)	0.0713	1-7/8" x 10" x 4-7/8"	25
UBC12-68	68mils (14ga)	0.0713	1-7/8" x 12" x 4-7/8"	25
UBC6-97	97mils (12ga)	0.1017	1-7/8" x 6" x 4-7/8"	25
UBC8-97	97mils (12ga)	0.1017	1-7/8" x 8" x 4-7/8"	25
UBC10-97	97mils (12ga)	0.1017	1-7/8" x 10" x 4-7/8"	25
UBC12-97	97mils (12ga)	0.1017	1-7/8" x 12" x 4-7/8"	25









INSTALLATION

Connections to the building can be made with screws, welds powder-actuated fasteners. Mechanical fasteners shall be located on the embossed marks given on the scored line of the 1-7/8" flange. Attach building anchors to the structure according to the manufacture's instructions. Anchors shall be installed through the embossments on the scored line of the clip as shown on the attached drawings. In no case shall anchors be installed more than 3/4" from the bend on the short leg of the clip. In cases of discrepancy between this information and the Design Engineer's details, the Design Engineer's details shall be followed.

For a Rigid Connection:

Attach the Universal Bypass Clip to cold-formed steel framing members using (6) #10-16 minimum self-drilling screws (not included) for the 14ga clip and (6) #12-14 minimum self-drilling screws (not included) for the 12ga clip, through the clip holes into the steel framing.

For a Deflection Connection:

Attach the Universal Bypass Clip to the cold-formed steel framing using (3) #14 proprietrary deflection screws (included) through the (3) slotted holes and positioned to allow for the appropriate building deflection.

Proprietary Deflection Screws:

Many of the ClarkDietrich deflection clips include our proprietary deflection fastener that has been specifically designed to provide friction-free deflection. These fasteners eliminate drag, binding or resistance that can often occur with common fasteners.






Universal Bypass Clip

UBC - 14ga (As a Rigid Connection w/ (6) screws)

ATTACHMENT TO STRUCTURAL: DESIGNED BY OTHERS

•	· · · · · ·			AllAcille	LIVI IO DIK
	Stud gauge	AS	D Allowable Loads	(lbs)	
Clip designation	(mils) Yield Strength	F1 (In-Plane) w/ (6) #10-16	F2 (Tension) w/ (6) #10-16	F3 (Compression) w/ (6) #10-16	F4 (Shear) w/ (6) #10-16
	33mils (20ga) 33ksi	165	1060	1060	395
LIDC((0	43mils (18ga) 33ksi	215	1450	1575	590
UBC6-68 68mils (14ga)	54mils (16ga) 50ksi	255	1450	1590	1055
oomiis (14ga)	68mils (14ga) 50ksi	255	1450	1590	1055
	97mils (12ga) 50ksi	255	1450	1590	1055
	33mils (20ga) 33ksi	165	1060	1060	290
11000 (0	43mils (18ga) 33ksi	215	1450	1405	430
UBC8-68 68mils (14ga)	54mils (16ga) 50ksi	220	1450	1405	770
oomiis (14ga)	68mils (14ga) 50ksi	220	1450	1405	770
	97mils (12ga) 50ksi	220	1450	1405	770
	33mils (20ga) 33ksi	165	1060	1060	225
LIDC10 (0	43mils (18ga) 33ksi	190	1450	1385	340
UBC10-68 68mils (14ga)	54mils (16ga) 50ksi	190	1450	1385	605
Oomis (14ga)	68mils (14ga) 50ksi	190	1450	1385	605
	97mils (12ga) 50ksi	190	1450	1385	605
	33mils (20ga) 33ksi	160	1060	1060	185
LIDC12 (0	43mils (18ga) 33ksi	160	1430	1285	280
UBC12-68 68mils (14ga)	54mils (16ga) 50ksi	160	1430	1285	495
oonins (14ga)	68mils (14ga) 50ksi	160	1430	1285	495
	97mils (12ga) 50ksi	160	1430	1285	495



Notos


- 1 Allowable loads (ASD) listed represent the capacity of the clip to the stud only. (Framing Connection)
- 2 Allowable Loads have not been increased for the wind, seismic, or other factors.
- 3 An 1/8-in service deflection load limit was applied to clips resisting F2, F3 and F4 loads. In accordance with ICC AC 261, service deflection limit was not applied to clips resisting F1 loads.
- 4 Listed capacities are based on the maximum screw pattern. For maximum screw pattern for a Rigid Clip, fill screws in (6) round holes.
- 5 For 12ga Rigid clip, (6) #12-14 screws shall be installed in the pilot holes. For 14ga Rigid clip, (6) #10-16 screws shall be installed in the pilot holes.
- 6 It is the responsibility of the design professional to design the attachment of the clips to the structure and verify that their capacity meets the requirements of the intended application.
- 7 Nominal or LRFD loads are available upon request.


UBC - 14ga (As a Rigid Connection w/ (6) screws)

ATTACHMENT TO STRUCTURAL: WELDED

	Stud gauge	ASD Allowable Loads (lbs)			
Clip designation	(mils) Yield Strength	F1 (In-Plane) w/ (6) #10-16	F2 (Tension) w/ (6) #10-16	F3 (Compression) w/ (6) #10-16	F4 (Shear) w/ (6) #10-16
	33mils (20ga) 33ksi	165	1060	1060	395
11004 40	43mils (18ga) 33ksi	215	1575	1575	590
UBC6-68	54mils (16ga) 50ksi	255	1755	1590	1055
68mils (14ga)	68mils (14ga) 50ksi	255	1755	1590	1055
	97mils (12ga) 50ksi	255	1755	1590	1055
	33mils (20ga) 33ksi	165	1060	1060	290
LIDCO (0	43mils (18ga) 33ksi	215	1575	1405	430
UBC8-68 68mils (14ga)	54mils (16ga) 50ksi	220	1675	1405	770
oomis (14ga)	68mils (14ga) 50ksi	220	1675	1405	770
	97mils (12ga) 50ksi	220	1675	1405	770
	33mils (20ga) 33ksi	165	1060	1060	225
LID C10 (0	43mils (18ga) 33ksi	190	1575	1385	340
UBC10-68 68mils (14ga)	54mils (16ga) 50ksi	190	1675	1385	605
oomis (14ga)	68mils (14ga) 50ksi	190	1675	1385	605
	97mils (12ga) 50ksi	190	1675	1385	605
	33mils (20ga) 33ksi	160	1060	1060	185
LID C12 (0	43mils (18ga) 33ksi	160	1575	1285	280
UBC12-68 68mils (14ga)	54mils (16ga) 50ksi	160	1675	1285	495
oomiis (14ga)	68mils (14ga) 50ksi	160	1675	1285	495
	97mils (12ga) 50ksi	160	1675	1285	495

- 1 Allowable Loads (ASD) have not been increased for the wind, seismic, or other factors.
- 2 Listed capacities are based on the maximum screw pattern. For maximum screw pattern for a Rigid Clip, fill screws in (6) round holes.
- 3 For 12ga Rigid clip, (6) #12-14 screws shall be installed in the pilot holes. For 14ga Rigid clip, (6) #10-16 screws shall be installed in the pilot holes.
- **4** The Allowable loads listed for welds are based on the following weld lengths:
- (2) Welds 1" along back of short leg clip bend (each weld equally distanced from center of clip).
- 5 Use E70XX (min.) electrodes.
- 6 It is the responsibility of the design professional to verify that the connection design meets the requirements of the intended application.
- 7 Nominal or LRFD loads are available upon request.






12ga Clip: (6) #12-14 Screws 14ga Clip: (6) #10-16 Screws Shown in a UBC6 Clip

UBC - 14ga (As a Rigid Connection w/ (6) screws)

ATTACHMENT TO STRUCTURAL: (4) #12-24 FASTENERS

	Stud gauge	ASD Allowable Loads (lbs)			
Clip designation	(mils) Yield Strength	F1 (In-Plane) w/ (6) #10-16	F2 (Tension) w/ (6) #10-16	F3 (Compression) w/ (6) #10-16	F4 (Shear) w/ (6) #10-16
	33mils (20ga) 33ksi	165	1060	1060	395
LIDC((0	43mils (18ga) 33ksi	215	1450	1575	590
UBC6-68 68mils (14ga)	54mils (16ga) 50ksi	255	1450	1590	1055
Oomins (14ga)	68mils (14ga) 50ksi	255	1450	1590	1055
	97mils (12ga) 50ksi	255	1450	1590	1055
	33mils (20ga) 33ksi	165	1060	1060	290
11000 (0	43mils (18ga) 33ksi	215	1450	1405	430
UBC8-68 68mils (14ga)	54mils (16ga) 50ksi	220	1450	1405	770
Oomins (14ga)	68mils (14ga) 50ksi	220	1450	1405	770
	97mils (12ga) 50ksi	220	1450	1405	770
	33mils (20ga) 33ksi	165	1060	1060	225
110010 10	43mils (18ga) 33ksi	190	1450	1385	340
UBC10-68 68mils (14ga)	54mils (16ga) 50ksi	190	1450	1385	605
Oomins (14ga)	68mils (14ga) 50ksi	190	1450	1385	605
	97mils (12ga) 50ksi	190	1450	1385	605
	33mils (20ga) 33ksi	160	1060	1060	185
LID C12 (0	43mils (18ga) 33ksi	160	1430	1285	280
UBC12-68 68mils (14ga)	54mils (16ga) 50ksi	160	1430	1285	495
Oomins (14ga)	68mils (14ga) 50ksi	160	1430	1285	495
	97mils (12ga) 50ksi	160	1430	1285	495




Notes:


- 1 Allowable Loads (ASD) have not been increased for the wind, seismic, or other factors.
- 2 An 1/8-in service deflection load limit was applied to clips resisting F2, F3 and F4 loads. In accordance with ICC AC 261, service deflection limit was not applied to clips resisting F1 loads.
- 3 Listed capacities are based on the maximum screw pattern. For maximum screw pattern for a Rigid Clip, fill screws in (6) round holes.
- 4 For 12ga Rigid clip, (6) #12-14 screws shall be installed in the pilot holes. For 14ga Rigid clip, (6) #10-16 screws shall be installed in the pilot holes.
- 5 #12-24 Fasteners shall be used for attachment to steel structure. (4) Fastener configuration shall be used. Screws should be placed at indentations scribed on the short leg of the UBC clip.
- 6 The minimum edge distance for each fastener type shall comply with the fastener manufacturer's recommendation.
- 7 It is the responsibility of the design professional to verify that the connection design meets the requirements of the intended application.
- 8 Nominal or LRFD loads are available upon request.

UBC - 14ga (As a Rigid Connection w/ (6) screws)

ATTACHMENT TO STRUCTURAL: (4) 0.157" PAFs

	Stud gauge	ASD Allowable Loads (lbs)			
Clip designation	(mils) Yield Strength	F1 (In-Plane) w/ (6) #10-16	F2 (Tension) w/ (6) #10-16	F3 (Compression) w/ (6) #10-16	F4 (Shear) w/ (6) #10-16
	33mils (20ga) 33ksi	165	1060	1060	395
LIDC((0	43mils (18ga) 33ksi	215	1450	1575	590
UBC6-68 68mils (14ga)	54mils (16ga) 50ksi	255	1450	1590	1055
oomiis (14ga)	68mils (14ga) 50ksi	255	1450	1590	1055
	97mils (12ga) 50ksi	255	1450	1590	1055
	33mils (20ga) 33ksi	165	1060	1060	290
LIDCO (O	43mils (18ga) 33ksi	215	1450	1405	430
UBC8-68 68mils (14ga)	54mils (16ga) 50ksi	220	1450	1405	770
oomis (1-ga)	68mils (14ga) 50ksi	220	1450	1405	770
	97mils (12ga) 50ksi	220	1450	1405	770
	33mils (20ga) 33ksi	165	1060	1060	225
UBC10-68	43mils (18ga) 33ksi	190	1450	1385	340
68mils (14ga)	54mils (16ga) 50ksi	190	1450	1385	605
ooninis (1-ga)	68mils (14ga) 50ksi	190	1450	1385	605
	97mils (12ga) 50ksi	190	1450	1385	605
	33mils (20ga) 33ksi	160	1060	1060	185
LIDC12 40	43mils (18ga) 33ksi	160	1430	1285	280
UBC12-68 68mils (14ga)	54mils (16ga) 50ksi	160	1430	1285	495
Oomins (14ga)	68mils (14ga) 50ksi	160	1430	1285	495
	97mils (12ga) 50ksi	160	1430	1285	495






12ga Clip: (6) #12-14 Screws 14ga Clip: (6) #10-16 Screws Shown in a UBC6 Clip

- 1 Allowable Loads (ASD) have not been increased for the wind, seismic, or other factors.
- 2 Nominal or LRFD loads are available upon request.
- 3 Listed capacities are based on the maximum screw pattern. For maximum screw pattern for a Rigid Clip, fill screws in (6) round holes.
- 4 For 12ga Rigid clip, (6) #12-14 screws shall be installed in the pilot holes. For 14ga Rigid clip, (6) #10-16 screws shall be installed in the pilot holes.
- 5 0.157" Hilti X-U PAFs shall be used for attachment to steel structure. (4) Fastener configuration shall be used. PAFs should be placed at indentations scribed on the short leg of the UBC clip.
- 6 Capacities considered for Hilti PAFs are based on fastener strengths listed in ICC ESR-2269.
- 7 It is the responsibility of the design professional to verify that the connection design meets the requirements of the intended application.
- 8 An 1/8-in service deflection load limit was applied to clips resisting F2, F3 and F4 loads. In accordance with ICC AC 261, service deflection limit was not applied to clips resisting F1 loads.

Universal Bypass Clip

UBC - 12ga (As a Rigid Connection w/ (6) screws) ATTACHMENT TO STRUCTURAL: DESIGNED BY OTHERS

	•				
	Stud gauge	AS	D Allowable Loads ((lbs)	
Clip designation	(mils) Yield Strength	F1 (In-Plane) w/ (6) #12-14	F2 (Tension) w/ (6) #12-14	F3 (Compression) w/ (6) #12-14	F4 (Shear) w/ (6) #12-14
	33mils (20ga) 33ksi	190	1130	1130	425
11004 07	43mils (18ga) 33ksi	245	1680	1680	630
UBC6-97 97mils (12ga)	54mils (16ga) 50ksi	265	2115	2540	1230
7/IIIIs (12ga)	68mils (14ga) 50ksi	265	2115	2540	1230
	97mils (12ga) 50ksi	265	2115	2540	1230
	33mils (20ga) 33ksi	190	1130	1130	310
11000 07	43mils (18ga) 33ksi	240	1680	1680	460
UBC8-97 97mils (12ga)	54mils (16ga) 50ksi	240	2115	2315	885
7/IIIIs (12ga)	68mils (14ga) 50ksi	240	2115	2315	885
	97 mils (12ga) 50ksi	240	2115	2315	885
	33mils (20ga) 33ksi	190	1130	1130	245
LIDC10 07	43mils (18ga) 33ksi	225	1680	1680	360
UBC10-97 97mils (12ga)	54mils (16ga) 50ksi	225	2115	2055	690
77111113 (12ga)	68mils (14ga) 50ksi	225	2115	2055	690
	97 mils (12ga) 50ksi	225	2115	2055	690
	33mils (20ga) 33ksi	190	1130	1130	200
LIDC12 07	43mils (18ga) 33ksi	195	1680	1680	295
UBC12-97 97mils (12ga)	54mils (16ga) 50ksi	195	2115	2055	605
77111113 (12ga)	68mils (14ga) 50ksi	195	2115	2055	630
	97 mils (12ga) 50ksi	195	2115	2055	630



Notes:


- 1 Allowable loads (ASD) listed represent the capacity of the clip to the stud only. (Framing Connection)
- 2 Allowable Loads have not been increased for the wind, seismic, or other factors.
- 3 An 1/8-in service deflection load limit was applied to clips resisting F2, F3 and F4 loads. In accordance with ICC AC 261, service deflection limit was not applied to clips resisting F1 loads.
- 4 Listed capacities are based on the maximum screw pattern. For maximum screw pattern for a Rigid Clip, fill screws in (6) round holes.
- 5 For 12ga Rigid clip, (6) #12-14 screws shall be installed in the pilot holes. For 14ga Rigid clip, (6) #10-16 screws shall be installed in the pilot holes.
- 6 It is the responsibility of the design professional to design the attachment of the clips to the structure and verify that their capacity meets the requirements of the intended application.
- 7 Nominal or LRFD loads are available upon request.


UBC - 12ga (As a Rigid Connection w/ (6) screws)

ATTACHMENT TO STRUCTURAL: WELDED

	Stud gauge	ASD Allowable Loads (lbs)			
Clip designation	(mils) Yield Strength	F1 (In-Plane) w/ (6) #12-14	F2 (Tension) w/ (6) #12-14	F3 (Compression) w/ (6) #12-14	F4 (Shear) w/ (6) #12-14
	33mils (20ga) 33ksi	190	1130	1130	425
LIDC(07	43mils (18ga) 33ksi	245	1680	1680	630
UBC6-97 97mils (12ga)	54mils (16ga) 50ksi	265	2110	2540	1230
77111113 (12ga)	68mils (14ga) 50ksi	265	2110	2540	1230
	97mils (12ga) 50ksi	265	2110	2540	1230
	33mils (20ga) 33ksi	190	1130	1130	310
11000 07	43mils (18ga) 33ksi	240	1680	1680	460
UBC8-97 97mils (12ga)	54mils (16ga) 50ksi	240	2110	2315	885
77111113 (12ga)	68mils (14ga) 50ksi	240	2110	2315	885
	97 mils (12ga) 50ksi	240	2110	2315	885
	33mils (20ga) 33ksi	190	1130	1130	245
LID C10 07	43mils (18ga) 33ksi	225	1680	1680	360
UBC10-97 97mils (12ga)	54mils (16ga) 50ksi	225	2110	2055	690
97111113 (12ga)	68mils (14ga) 50ksi	225	2110	2055	690
	97 mils (12ga) 50ksi	225	2110	2055	690
	33mils (20ga) 33ksi	190	1130	1130	200
LID C12 07	43mils (18ga) 33ksi	195	1680	1680	295
UBC12-97 97mils (12ga)	54mils (16ga) 50ksi	195	2110	2055	605
7/IIIIs (IZga)	68mils (14ga) 50ksi	195	2110	2055	630
	97 mils (12ga) 50ksi	195	2110	2055	630

- 1 Allowable Loads (ASD) have not been increased for the wind, seismic, or other factors.
- 2 Listed capacities are based on the maximum screw pattern. For maximum screw pattern for a Rigid Clip, fill screws in (6) round holes.
- 3 For 12ga Rigid clip, (6) #12-14 screws shall be installed in the pilot holes. For 14ga Rigid clip, (6) #10-16 screws shall be installed in the pilot holes.
- **4** The Allowable loads listed for welds are based on the following weld lengths:
- (2) Welds 1" along back of short leg clip bend (each weld equally distanced from center of clip).
- 5 Use E70XX (min.) electrodes.
- 6 It is the responsibility of the design professional to verify that the connection design meets the requirements of the intended application.
- **7** Nominal or LRFD loads are available upon request.






12ga Clip: (6) #12-14 Screws 14ga Clip: (6) #10-16 Screws Shown in a UBC6 Clip

UBC - 12ga (As a Rigid Connection w/ (6) screws)

ATTACHMENT TO STRUCTURAL: (4) #12-24 FASTENERS

•	· · · · · · · ·			ATTACIIN	LINI IO SINOC
	Stud gauge	AS	D Allowable Loads	(lbs)	
Clip designation	(mils) Yield Strength	F1 (In-Plane) w/ (6) #12-14	F2 (Tension) w/ (6) #12-14	F3 (Compression) w/ (6) #12-14	F4 (Shear) w/ (6) #12-14
	33mils (20ga) 33ksi	190	1130	1130	425
LIDCA 07	43mils (18ga) 33ksi	245	1680	1680	630
UBC6-97 97mils (12ga)	54mils (16ga) 50ksi	265	2115	2540	1230
7711111S (12ga)	68mils (14ga) 50ksi	265	2115	2540	1230
	97mils (12ga) 50ksi	265	2115	2540	1230
	33mils (20ga) 33ksi	190	1130	1130	310
11000 07	43mils (18ga) 33ksi	240	1680	1680	460
UBC8-97 97mils (12ga)	54mils (16ga) 50ksi	240	2115	2315	885
9711111S (12ga)	68mils (14ga) 50ksi	240	2115	2315	885
	97 mils (12ga) 50ksi	240	2115	2315	885
	33mils (20ga) 33ksi	190	1130	1130	245
LID C10 07	43mils (18ga) 33ksi	225	1680	1680	360
UBC10-97 97mils (12ga)	54mils (16ga) 50ksi	225	2115	2055	690
9711111S (12ga)	68mils (14ga) 50ksi	225	2115	2055	690
	97 mils (12ga) 50ksi	225	2115	2055	690
110010 07	33mils (20ga) 33ksi	190	1130	1130	200
	43mils (18ga) 33ksi	195	1680	1680	295
UBC12-97 97mils (12ga)	54mils (16ga) 50ksi	195	2115	2055	605
>, IIIII3 (12 ga)	68mils (14ga) 50ksi	195	2115	2055	630
	97 mils (12ga) 50ksi	195	2115	2055	630




Notes:


- 1 Allowable Loads (ASD) have not been increased for the wind, seismic, or other factors.
- 2 An 1/8-in service deflection load limit was applied to clips resisting F2, F3 and F4 loads. In accordance with ICC AC 261, service deflection limit was not applied to clips resisting F1 loads.
- 3 Listed capacities are based on the maximum screw pattern. For maximum screw pattern for a Rigid Clip, fill screws in (6) round holes.
- 4 For 12ga Rigid clip, (6) #12-14 screws shall be installed in the pilot holes. For 14ga Rigid clip, (6) #10-16 screws shall be installed in the pilot holes.
- 5 #12-24 Fasteners shall be used for attachment to steel structure. (4) Fastener configuration shall be used. Screws should be placed at indentations scribed on the short leg of the UBC clip.
- 6 The minimum edge distance for each fastener type shall comply with the fastener manufacturer's recommendation.
- 7 It is the responsibility of the design professional to verify that the connection design meets the requirements of the intended application.
- 8 Nominal or LRFD loads are available upon request.

UBC - 12ga (As a Rigid Connection w/ (6) screws)

ATTACHMENT TO STRUCTURAL: (4) 0.157" PAFs

	Stud gauge	ASD Allowable Loads (lbs)			
Clip designation	(mils) Yield Strength	F1 (In-Plane) w/ (6) #12-14	F2 (Tension) w/ (6) #12-14	F3 (Compression) w/ (6) #12-14	F4 (Shear) w/ (6) #12-14
	33mils (20ga) 33ksi	190	1130	1130	425
LIDG(07	43mils (18ga) 33ksi	245	1680	1680	630
UBC6-97 97mils (12ga)	54mils (16ga) 50ksi	265	2000	2540	1230
7711111S (12ga)	68mils (14ga) 50ksi	265	2000	2540	1230
	97mils (12ga) 50ksi	265	2000	2540	1230
	33mils (20ga) 33ksi	190	1130	1130	310
11000 07	43mils (18ga) 33ksi	240	1680	1680	460
UBC8-97 97mils (12ga)	54mils (16ga) 50ksi	240	2000	2315	885
9711111S (12ga)	68mils (14ga) 50ksi	240	2000	2315	885
	97mils (12ga) 50ksi	240	2000	2315	885
	33mils (20ga) 33ksi	190	1130	1130	245
LID C10 07	43mils (18ga) 33ksi	225	1680	1680	360
UBC10-97 97mils (12ga)	54mils (16ga) 50ksi	225	2000	2055	690
7711111s (12ga)	68mils (14ga) 50ksi	225	2000	2055	690
	97mils (12ga) 50ksi	225	2000	2055	690
	33mils (20ga) 33ksi	190	1130	1130	200
LID C12 07	43mils (18ga) 33ksi	195	1680	1680	295
UBC12-97 97mils (12ga)	54mils (16ga) 50ksi	195	2000	2055	605
27 IIIIIs (128a)	68mils (14ga) 50ksi	195	2000	2055	630
	97mils (12ga) 50ksi	195	2000	2055	630





12ga Clip: (6) #12-14 Screws 14ga Clip: (6) #10-16 Screws Shown in a UBC6 Clip

- 1 Allowable Loads (ASD) have not been increased for the wind, seismic, or other factors.
- 2 Nominal or LRFD loads are available upon request.
- 3 Listed capacities are based on the maximum screw pattern. For maximum screw pattern for a Rigid Clip, fill screws in (6) round holes.
- 4 For 12ga Rigid clip, (6) #12-14 screws shall be installed in the pilot holes. For 14ga Rigid clip, (6) #10-16 screws shall be installed in the pilot holes.
- 5 0.157" Hilti X-U PAFs shall be used for attachment to steel structure. (4) Fastener configuration shall be used. PAFs should be placed at indentations scribed on the short leg of the UBC clip.
- 6 Capacities considered for Hilti PAFs are based on fastener strengths listed in ICC ESR-2269.
- 7 It is the responsibility of the design professional to verify that the connection design meets the requirements of the intended application.
- 8 An 1/8-in service deflection load limit was applied to clips resisting F2, F3 and F4 loads. In accordance with ICC AC 261, service deflection limit was not applied to clips resisting F1 loads.

SwiftClip™ L-Series™ Support Clip

Support for the most demanding applications.

SwiftClipTM L-SeriesTM support clips are used in multiple construction projects, specifically in conjunction with structural studs and track. The L-shaped clips fit between the stud flanges, so that shorter length clips do not need to be ordered. These labor time-savers include prepunched holes for quicker screw attachments, and are punched to accommodate for CRC lateral bracing connections.

ALTERNATIVE PRODUCTS

EasyClip™ E-Series™ Support Clip EasyClip S-Series™ Support Clip EasyClip U-Series™ Clip Angle FastBridge™ Clip EasyClip X-Series™ Clip Angle EasyClip A-Series™ End Clip

PRODUCT DIMENSIONS

See chart below for available sizes.

MATERIAL SPECIFICATIONS

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Gauge: 14 gauge (68mils) **Design Thickness**: 0.0713 inches


Gauge: 12 gauge (97mils)

Design Thickness: 0.1017 inches


Coating: G90

Yield Strength: 50ksi ASTM: A653/A653M

	Thickness				
Product code	Mils (Gauge)	Design thickness (in)	Size (in)	Common application	Packaging Pcs./Bucket
LS543	54mils (16ga)	0.0566		CRC/Openings	300
LS683	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 3-1/4	Openings	300
LS973	97mils (12ga)	0.1017		Openings	200
LS545	54mils (16ga)	0.0566		CRC/Openings/Joists	200
LS685	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 5-1/2	Openings/Joists	200
LS975	97mils (12ga)	0.1017	-	Openings/Joists	100
LS547	54mils (16ga)	0.0566		CRC/Openings/Joists	150
LS687	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 7-1/4	Openings/Joists	100
LS977	97mils (12ga)	0.1017		Openings/Joists	100
LS549	54mils (16ga)	0.0566		Joists	100
LS689	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 9-1/4	Joists	100
LS979	97mils (12ga)	0.1017		Joists	50
LS541	54mils (16ga)	0.0566		Joists	100
LS681	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 11-1/4	Joists	50
LS971	97mils (12ga)	0.1017		Joists	50
LS5413	54mils (16ga)	0.0566		Joists	50
LS6813	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 13-1/4	Joists	50
LS9713	97mils (12ga)	0.1017		Joists	25
LE543	54mils (16ga)	0.0566		Fixed/Joists/Trusses	100
LE683	68mils (14ga)	0.0713	1-1/2 x 3 x 3-1/4	Fixed/Joists/Trusses	100
LE973	97mils (12ga)	0.1017	-	Fixed/Joists/Trusses	50
LE545	54mils (16ga)	0.0566		Fixed/Joists/Trusses	100
LE685	68mils (14ga)	0.0713	1-1/2 x 3 x 5-1/2	Fixed/Joists/Trusses	100
LE975	97mils (12ga)	0.1017	-	Fixed/Joists/Trusses	50
LE547	54mils (16ga)	0.0566		Fixed/Joists/Trusses	100
LE687	68mils (14ga)	0.0713	1-1/2 x 3 x 7-1/4	Fixed/Joists/Trusses	50
LE977	97mils (12ga)	0.1017		Fixed/Joists/Trusses	50
LA543	54mils (16ga)	0.0566		Joists/Trusses	100
LA683	68mils (14ga)	0.0713	3 x 3 x 3-1/4	Joists/Trusses	100
LA973	97mils (12ga)	0.1017		Joists/Trusses	50
LA545	54mils (16ga)	0.0566		Joists/Trusses	100
LA685	68mils (14ga)	0.0713	3 x 3 x 5-1/2	Joists/Trusses	50
LA975	97mils (12ga)	0.1017		Joists/Trusses	50
LA547	54mils (16ga)	0.0566		Joists/Trusses	50
LA687	68mils (14ga)	0.0713	3 x 3 x 7-1/4	Joists/Trusses	50
LA977	97mils (12ga)	0.1017		Joists/Trusses	50

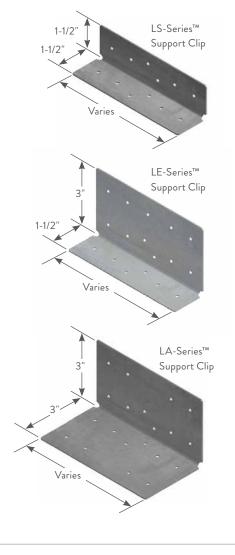

Allowable Shear Load Table Stud Thickness (Yield Strength) **Product** No. of 20ga (33mils) 33ksi 18ga 16ga (43mils) 33ksi (54mils) 50ksi 14ga 12ga (68mils) 50ksi (97mils) 50ksi code screws/leg LS543 LS683 LS973 LS545 LS685 LS975 LS547 LS687 LS977 LS549 LS689 LS979 LS541 LS681 LS971 LS5413 LS6813 LS9713





Joist-to-Joist Connections



Head-to-Jamb Connections

- 1 Shear values for clips are based on attachment to cold-formed steel members. Attachment to othe substrates must be designed separately.
- 2 Place the first two screws in each leg in the outermost screw holes. Place the next two screws (if needed) in center holes next to the CRC holes (diagonal). The next screws (if needed) are placed moving from the outermost holes toward the center, symmetrically.
- 3 Shear values are based on the tilting bearing modes of failure Eq. E4.3.1-1, E4.3.1-2.4. Allowable screw shear is based on a factor of safety of 3.0. #10 screws (0.19" min. diameter) must have minimum ultimate shear strength of 1400 lbs.
- 4 Screws must have three threads exposed after installation.
- 5 It is the responsibility of the design engineer to detail the attachment of clips and verify their capacity meets the application. This table is intended for use by qualified engineers.
- 6 For technical assistance or additional load charts, contact ClarkDietrich at 888-437-3244.

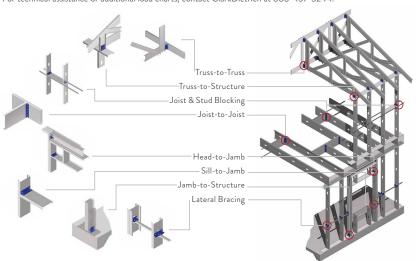



Sill-to-Jamb Connections

Extended SwiftClip™ LE-Series

Used in rigid attachments of wall studs to the structure.


ClarkDietrich's Extended SwiftClip™ LE-Series rigid framing clip is used to attach exterior wall studs to the structure of the building. Designed to resist horizontal and vertical loads, the extended rigid clips install easily with screws, powder-actuated fasteners, or welds. This clip is ideal for all medium and large standoff conditions. These clips are unpunched as the specific application will determine the appropriate number and placement of fasteners.

PRODUCT DIMENSIONS

- 1-1/2" x 3" legs for up to 20" long clips
- 1-1/2" x 2-5/8" legs + 1/2" return for clips longer than 20"
- All clips: 68 mils (14 gauge) 50ksi, CP90
- LE-Series clips are unpunched
- Lengths available: 16", 18", 20", 24", 30", 36"

INSTALLATION


Extended SwiftClip™ LE-Series are attached to coldformed steel framing members using #10 minimum self-drilling screws. Clips can also be welded to the cold-formed steel framing. Connections to the building frame can be made with powder-actuated fasteners, drill-in concrete anchors or welding. The appropriate type, number and placement of fasteners need to be determined by a design professional and engineer of record.



Profile for clips up to 20" long

Extended SwiftClip™ LE-Series

		•				
Product	1	Thickness	Size (in)	Packaging		
code	Mils (Gauge)	Design thickness (in)	Size (in)	Pcs./Box		
LE6816			1-1/2" x 3" x 16"			
LE6818	68mils (14ga)	0.0713	1-1/2" x 3" x 18"	10		
LE6820			1-1/2" x 3" x 20"			
LE6824	68mils (14ga)		1-1/2" x 2-5/8" x 24"	10		
LE6830		0.0713	1-1/2" x 2-5/8" x 30"			
LE6836			1-1/2" x 2-5/8" x 36"			

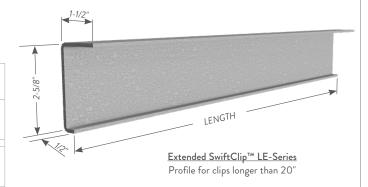

Extended SwiftClip™ LE-Series Allowable Loads

	Gross Section Properties								
Product code	Area (in²)	lx (in⁴)	ly (in⁴)	Sx (in³)	Sy (in³)	rx (in)	ry (in)	x(c) (in)	y(c) (in)
Extended SwiftClip™ < 20in	0.311	0.304	0.056	0.155	0.046	0.988	0.424	0.281	1.04
Extended SwiftClip™ > 20in	0.311	0.282	0.054	0.176	0.054	0.952	0.418	0.307	1.02

- 1 Extended SwiftClip™ LE-Series intended for axial compression and tension loading.
- 2 lx, ly are the gross moment of inertia about the X-axis and Y-axis, respectively.
- 3 Sx, Sy are the section modulus about the X-axis and Y-axis, respectively.
- 4 rx, ry are the radius of gyration about the X-axis and Y-axis, respectively.
- **5** x(c), y(c) are the distances of the centroid to the X-axis and Y-axis attachment planes.



EasyClip™ U-Series™ Clip Angle

Secures U-channel (cold-rolled channel) to framing members for lateral bridging, miscellaneous rigid connections, and multipurpose reinforcing supports.

ClarkDietrich EasyClip™ U-Series™ clip angles are used to secure U-channel to wall studs for lateral bridging or for miscellaneous rigid connections. U-channel is passed through the stud knockout and an EasyClip U-Series clip is screw-attached or welded to provide a rigid connection. Available in a variety of lengths and gauges, EasyClip U-Series clips are prepunched for faster and more accurate fastener placement. U-Series clip angles and U-channel should not be used in bridging applications when the stud width exceeds 6."

ALTERNATIVE PRODUCTS

FastBridge[™] Clip EasyClip[™] X-Series[™] Clip Angle SwiftClip[™] LS-Series[™] Support Clip Spazzer® 5400 and Spazzer® 9200 Spacer Bars

PRODUCT DIMENSIONS

1-1/2" x 1-1/2" x 3-3/8" 1-1/2" x 1-1/2" x 5-3/4" 1-1/2" x 1-1/2" x 7-3/4" 1-1/2" x 1-1/2" x 9-3/4"

MATERIAL SPECIFICATIONS

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Gauge: 12 gauge (97mils)

Design Thickness: 0.1017 inches


Coating: G90 Yield Strength: 50ksi ASTM: A653/A653M



INSTALLATION

U-channel is inserted into the stud punchout (as specified by design) and rotated into place. U-Series clip angles are attached horizontally to the outside or hard side of the cold-formed steel (CFS) framing members. The clip must be firmly seated against the web of the U-channel. The clip should not be more than 1/4" less than the cold-formed framing member. U-Series clips are fastened using #10 minimum self-drilling screws driven through the clip holes into the steel framing. Clips may also be welded to the CFS framing.

EasyCli _l	p™ U-Seri	es™ Clip A	ngles		
	Thic	kness :			
Product code	Mils (Gauge)	Design thickness (in)	Size (in)	Packaging Pcs./Bucket	
U543	54mils (16ga)	0.0566	1-1/2 x 1-1/2 x 3-3/8	400	
U545	54mils (16ga)	0.0566	1-1/2 x 1-1/2 x 5-3/4	200	
U547	54mils (16ga)	0.0566	1-1/2 x 1-1/2 x 7-3/4	100	
U549	54mils (16ga)	0.0566	1-1/2 x 1-1/2 x 9-3/4	100	
U683	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 3-3/8	200	
U685	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 5-3/4	170	
U687	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 7-3/4	100	
U689	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 9-3/4	100	
U973	97mils (12ga)	0.1017	1-1/2 x 1-1/2 x 3-3/8	200	
U975	97mils (12ga)	0.1017	1-1/2 x 1-1/2 x 5-3/4	130	
U977	97mils (12ga)	0.1017	1-1/2 x 1-1/2 x 7-3/4	100	
U979	97mils (12ga)	0.1017	1-1/2 x 1-1/2 x 9-3/4	80	



EasyClip U-Series Clip Angle

EasyClip™ S-Series™ Support Clip

For rigid connection applications not requiring a long leg.

ClarkDietrich EasyClip™ S-Series™ support clips are commonly used for rigid connections in window and door framing, joist, bypass or other miscellaneous connections to secure one framing member to another, or to secure framing members to the structural frame. This high-performance, multi-use utility clip is ideal for corner reinforcements, stair openings, and numerous support applications. Available in a variety of lengths and gauges, EasyClip S-Series clips are prepunched for faster and more accurate fastener placement.

ALTERNATIVE PRODUCTS

EasyClip™ U-Series™ Clip Angle EasyClip X-Series™ Clip Angle EasyClip D-Series™ Anchor Clip SwiftClip™ LS-Series™ Support Clip

PRODUCT DIMENSIONS

1-1/2" x 1-1/2" x 3" 1-1/2" x 1-1/2" x 5" 1-1/2" x 1-1/2" x 7" 1-1/2" x 1-1/2" x 9" 1-1/2" x 1-1/2" x 11"

MATERIAL SPECIFICATIONS

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

40 (07 11)

Gauge: 12 gauge (97mils)


Design Thickness: 0.1017 inches


Coating: G90


Yield Strength: 50ksi **ASTM**: A653/A653M

INSTALLATION

EasyClip S-Series support clips are attached to the cold-formed steel (CFS) framing members using #10 minimum self-drilling screws driven through the clip holes into the steel framing. When not filling all holes, install fasteners symmetrically starting at the top and bottom edges and move toward the center of the clip. Clip can also be welded to the CFS framing. Connections to the building frame can be made with powder-actuated fasteners, drill-in concrete anchors or welding. When using the tabular values for a welded clip, provide a full weld to the structure, top to bottom, along the outside of the clip. A 3/4" minimum weld on the outside edge of the 1-1/2" leg is also required to control warping or to hold the clip in place before final welding.



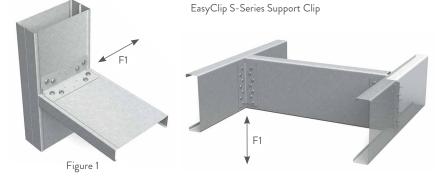



EasyC	EasyClip™ S-Series™ Support Clips									
Product code	Mils (Gauge)	Design thickness (in)	Size (in)	Packaging Pcs./ Bucket						
S543	54mils (16ga)	0.0566	1-1/2 x 1-1/2 x 3	400						
S545	54mils (16ga)	0.0566	1-1/2 x 1-1/2 x 5	200						
S547	54mils (16ga)	0.0566	1-1/2 x 1-1/2 x 7	100						
S549	54mils (16ga)	0.0566	1-1/2 x 1-1/2 x 9	100						
S541	54mils (16ga)	0.0566	1-1/2 x 1-1/2 x 11	100						
S683	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 3	200						
S685	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 5	200						
S687	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 7	100						
S689	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 9	100						
S681	68mils (14ga)	0.0713	1-1/2 x 1-1/2 x 11	100						
S973	97mils (12ga)	0.1017	1-1/2 x 1-1/2 x 3	200						
S975	97mils (12ga)	0.1017	1-1/2 x 1-1/2 x 5	150						
S977	97mils (12ga)	0.1017	1-1/2 x 1-1/2 x 7	100						
S979	97mils (12ga)	0.1017	1-1/2 x 1-1/2 x 9	80						
S971	97mils (12ga)	0.1017	1-1/2 x 1-1/2 x 11	70						

EasyClip™ S-Series™ Support Clips Allowable Clip Capacities (lbs)

USING #10-16 SELF-DRILLING SCREWS

	N. 6				Stud Thi	ckness and Yield	Strength				
Clip	No. of screws to	2	0ga (33mils) 33k	si	18	3ga (43mils) 33k	si	16	iga (54mils) 50ks	i	
	steel framing (1)	F1	F2	F3	F1	F2	F3	F1	F2	F3	
S543	3	295 (295)	210 (531)	531	437 (437)	210 (788)	788	777 (555)	210 (1195)	1400	
CE 4E	2	317 (317)	354 (354)	354	470 (470)	371 (525)	525	835 (835)	371 (933)	933	
S545	5	651 (651)	371 (885)	885	965 (965)	371 (1313)	1313	1716 (1460)	371 (2105)	2333	
CF 47	4	653 (653)	531 (708)	708	969 (969)	531 (1050)	1050	1722 (1722)	531 (1867)	1867	
S547	7	1029 (1029)	531 (1239)	1239	1526 (1526)	531 (1838)	1838	2712 (2456)	531 (3015)	3267	
CE 40	4	679 (679)	692 (708)	708	1007 (1007)	692 (1050)	1050	1790 (1790)	692 (1867)	1867	
S549	9	1408 (1408)	692 (1593)	1593	2090 (2090)	692 (2363)	2363	3714 (3452)	692 (3925)	4200	
CE 44	6	1015 (1015)	852 (1062)	1062	1505 (1505)	852 (1576)	1576	2675 (2675)	852 (2800)	2800	
S541	11	1785 (1785)	852 (1947)	1947	2648 (2648)	852 (2889)	2889	4706 (4432)	852 (4835)	5133	
S683	3	295 (295)	333 (531)	531	437 (437)	333 (788)	788	777 (699)	333 (1400)	1400	
C (O F	2	317 (317)	354 (354)	354	470 (470)	525 (525)	525	835 (835)	587 (933)	933	
S685	5	651 (651)	587 (885)	885	965 (965)	587 (1313)	1313	1716 (1716)	587 (2333)	2333	
6407	4	653 (653)	708 (708)	708	969 (969)	841 (1050)	1050	1722 (1722)	841 (1867)	1867	
S687	7	1029 (1029)	841 (1239)	1239	1526 (1526)	841 (1838)	1838	2712 (2712)	841 (3267)	3267	
6400	4	679 (679)	708 (708)	708	1007 (1007)	1050 (1050)	1050	1790 (1790)	1095 (1867)	1867	
S689	9	1408 (1408)	1095 (1593)	1593	2090 (2090)	1095 (2363)	2363	3714 (3714)	1095 (4200)	4200	
C (O1	6	1015 (1015)	1062 (1062)	1062	1505 (1505)	1349 (1576)	1576	2675 (2675)	1349 (2800)	2800	
S681	11	1785 (1785)	1349 (1947)	1947	2648 (2648)	1349 (2889)	2889	4706 (4706)	1349 (5133)	5133	
S973	3	295 (295)	531 (531)	531	437 (437)	679 (788)	788	777 (777)	679 (1400)	1400	
C07F	2	317 (317)	354 (354)	354	470 (470)	525 (525)	525	835 (835)	933 (933)	933	
S975	5	651 (651)	885 (885)	885	965 (965)	1196 (1313)	1313	1716 (1716)	1196 (2333)	2333	
6077	4	653 (653)	708 (708)	708	969 (969)	1050 (1050)	1050	1722 (1722)	1713 (1867)	1867	
S977	7	1029 (1029)	1239 (1239)	1239	1526 (1526)	1713 (1838)	1838	2712 (2712)	1713 (3267)	3267	
5070	4	679 (679)	708 (708)	708	1007 (1007)	1050 (1050)	1050	1790 (1790)	1867 (1867)	1867	
S979	9	1408 (1408)	1593 (1593)	1593	2090 (2090)	2229 (2363)	2363	3714 (3714)	2229 (4200)	4200	
CO71	6	1015 (1015)	1062 (1062)	1062	1505 (1505)	1576 (1576)	1576	2675 (2675)	2746 (2800)	2800	
S971	11	1785 (1785)	1947 (1947)	1947	2648 (2648)	2746 (2889)	2889	4706 (4706)	2746 (5133)	5133	

Notes:

Screw Capacity Notes

- 1 The tabulated value indicates the number of screws in a single clip leg attached to the cold-formed steel (CFS) framing.
- 2 Screws shall be attached in a symmetric manner, starting at the outside holes and moving to the center. Reference Figure 1 on opposite page.
- 3 The allowable values for F1 are based only on the shear capacity of the clip leg attached to the CFS framing. The capacity of the attachment to other materials and structures must be checked separately.
- 4 The allowable values for F2 assume mechanical fasteners are attached to the structure, and are along the vertical centerline of the clip leg. Mechanical fasteners to other materials and structures must be checked separately.
- **5** The screw diameter must be 0.19" (min.) for #10 screws.
- 6 The ultimate screw shear strength must be a minimum of 1400 lbs for #10 screws.
- 7 When clips have combinations of F1, F2, and F3, use a linear interaction for combinations of F1 and F3, and a squared interaction for combinations of F1 and F2.

- 8 Screws must be long enough so that at least three exposed threads are visible after installation.
- 9 Allowable loads have not been increased 33% for wind or seismic.
- 10 For connections made to 14 gauge (68mils) and 12 gauge (97mils), use the tabulated values for 16 gauge (54mils), 50ksi.
- 11 It is the responsibility of the design professional to detail the drawings for proper clip attachment.
- 12 Contact ClarkDietrich at 888-437-3244 for technical assistance.

Weld Capacity Notes:

- 1 F1 and F2 values in parentheses are maximum shear and tension capacities when the clips are welded to the base structure (min 3/16" 36ksi steel).
- 2 Listed weld capacities are computed assuming an E70XX welding rod or wire.
- 3 The clips are to be welded to the structure along the back corner and along the complete length of the clip. When secondary welds are used to hold the clip in place, they are not used in capacity calculations.

EasyClip™ A-Series™ End Clip

For knee-wall connections or to reinforce jamb stud connections at the primary frame.

ClarkDietrich EasyClip™ A-Series™ end clips are most commonly used to reinforce connections in knee-wall applications or to reinforce jamb stud connections to the primary frame. These clips are unpunched as the specific application will determine the appropriate number and placement of fasteners.

ALTERNATIVE PRODUCTS

EasyClip™ D-Series™ Anchor Clip EasyClip T-Series™ Tall Anchor Clip SwiftClip™ LA-Series™ Support Clip

PRODUCT DIMENSIONS

3" x 3" x 3" 3" x 3" x 6"

MATERIAL SPECIFICATIONS

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Gauge: 12 gauge (97mils)


Design Thickness: 0.1017 inches

Coating: G90


Yield Strength: 50ksi **ASTM**: A653/A653M

INSTALLATION

EasyClip A-Series end clips are attached to cold-formed steel (CFS) framing members using #10 minimum self-drilling screws. Clips can also be welded to the CFS framing. Connections to the building frame can be made with powder-actuated fasteners, drill-in concrete anchors or welding. When using the tabular values for a welded clip, provide a full weld to the structure, top to bottom, along the outside of the clip. A 3/4" minimum weld to the outside edge of the 3" leg is also recommended to control warping or to hold the clip in place before final welding.





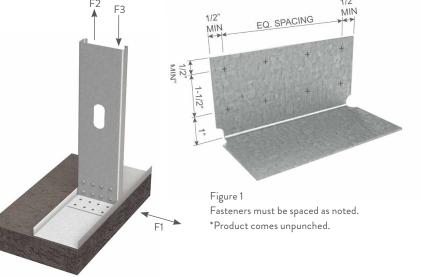

USING #10-16 EasyClip™ A-Series™ End Clips Allowable Clip Capacities (lbs) **SELF-DRILLING SCREWS** Stud Thickness and Yield Strength No. of screws to Clip 20ga (33mils) 33ksi 18ga (43mils) 33ksi 16ga (54mils) 50ksi steel framing (1) F3 F1 F1 F3 F2 F2 F2 354 (354) 120 (708) 708 525 (375) 120 (1050 1050 775 (375) 120 (1365) 1381 A543 120 (1062) 6 531 (375) 1062 775 (375) 120 (1365) 1381 775 (375) 120 (1365) 1381 531 (531) 241 (1062) 1062 788 (788) 241 (1576) 1576 1400 (1355) 241 (2730) 2800 1867 (1355) 8 708 (708) 241 (1416) 1416 1050 (1050) 241 (2101) 2101 241 (2730) 3452 A546 10 885 (885) 241 (1770) 1770 1313 (1313) 241 (2626) 2626 2333 (1355) 241 (2730) 3452 12 1062 (1062) 241 (2124) 2124 1576 (1355) 241 (2730) 3151 2634 (1355) 241 (2730) 3452 354 (354) 190 (708) 708 525 (472) 190 (1050) 1050 933 (472) 190 (1718) 1867 4 A683 6 531 (472) 190 (1062) 1062 788 (472) 190 (1576) 1576 1149 (472) 190 (1718) 2353 531 (531) 381 (1062) 1062 788 (788) 381 (1576) 1400 (1400) 381 (2800) 2800 1576 8 708 (708) 381 (1416) 1416 1050 (1050) 381 (2101) 2101 1867 (1705) 381 (3436) 3733 A686 885 (885) 381 (1770) 1770 1313 (1313) 2333 (1705) 381 (3436) 381 (2626) 2626 4667 12 1062 (1062) 381 (2124) 2124 1576 (1576) 381 (3151) 3151 2800 (1705) 381 (3436) 5600 4 354 (354) 388 (708) 708 525 (525) 388 (1050) 933 (673) 388 (1867) 1867 A973 388 (1062) 388 (1576) 1400 (673) 388 (2451) 2800 6 531 (531) 1062 788 (673) 1576 531 (531) 788 (788) 1400 (1400) 775 (2800) 2800 6 775 (1062) 1062 775 (1576) 1576 8 708 (708) 775 (1416) 1416 1050 (1050) 775 (2101) 2101 1867 (1867) 775 (3733) 3733 A976 885 (885) 775 (1770) 1770 1313 (1313) 775 (2626) 2626 2333 (2333) 775 (4667) 4667

1576 (1576)

Notes:

Screw Capacity Notes:

12

1 The tabulated value indicates the number of screws in a single clip leg attached to the cold-formed steel (CFS) framing.

1062 (1062)

775 (2124)

2124

- 2 Screws shall be attached in a symmetric manner starting at the top and bottom moving to the center, see Figure 1 opposite page.
- **3** The allowable values for F1 are based only on the shear capacity of the clip leg attached to the CFS framing. The capacity of the attachment to other materials and structures must be checked separately.
- 4 The allowable values for F2 assume mechanical fasteners are attached to the structure and are located no more than 1" away from the angle bend. Mechanical fasteners to other materials and structures must be checked separately.
- 5 This table is intended for use by qualified engineers only. It is the responsibility of the engineer to verify that the tabulated values apply to a specific connection application.
- **6** When clips have combinations of F1, F2 and F3, use a linear interaction for combinations of F1 and F3, and a squared interaction for combinations of F1 and F2.

7 Allowable loads have not been increased 33% for wind or seismic.

3151

8 For connections made to 14 gauge (68mils) and 12 gauge (97mils), use the tabulated values for 16 gauge (54mils), 50ksi.

2800 (2432)

775 (4903)

5600


- 9 It is the responsibility of the design professional to detail the drawings for proper clip attachment.
- 10 Contact ClarkDietrich at 888-437-3244 for technical assistance.


Weld Capacity Notes:

775 (3151)

- 1 F1 and F2 values in parentheses are maximum shear and tension capacities when the clips are welded to the base structure (min. 3/16" 36ksi steel).
- 2 Listed weld capacities are computed assuming an E70XX welding rod or wire.
- 3 The clips are to be welded to the structure along the back corner along the complete length of the clip. When secondary welds are used to hold the clip in place, they are not used in capacity calculations. 3/4" min. secondary weld as required to control warping or to hold clip in place before final welding.

TYPICAL CONSTRUCTION DETAILS





Visit our CAD Library at clarkdietrich.com to view or download construction details in .dwg, .dxf, and .pdf formats.

EasyClip™ D-Series™ Anchor Clip/EasyClip™ T-Series™ Tall Anchor Clip

Cost-effective tie-down solutions for knee walls, shearwalls and truss connections.

ClarkDietrich EasyClip™ D-Series™ anchor clips and T-Series™ tall anchor clips are high-performance, costeffective solutions for knee wall-to-foundation connections, light-duty shearwall-to-foundation connections and truss-to-wall connections. These multi-application clips feature reinforced stiffening ribs that provide superior design values for maximum performance. The EasyClip D-Series anchor clips and T-Series tall anchor clips are designed to resist horizontal, torsional and vertical (uplift) loads. These clips are prepunched with a series of attachment holes including anchor bolt, Kwik-Con and screw holes, for efficient and accurate fastener placement.

ALTERNATIVE PRODUCTS

EasyClip[™] A-Series[™] End Clip SwiftClip[™] LA-Series[™] Support Clip Uni-Clip[™]

PRODUCT DIMENSIONS

EasyClip D-Series:

2" x 2" x 3-1/2"

2" x 2" x 5-1/2"

EasyClip T-Series:

2" x 4" x 3-1/2"

2" x 4" x 5-1/2"

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Gauge: 12 gauge (97mils)


Design Thickness: 0.1017 inches

Coating: G90


Yield Strength: 50ksi ASTM: A653/A653M

INSTALLATION

Install EasyClip D-Series and T-Series anchor clips by attaching the screw hole-only leg to the web of the stud, joist, rafter or track with the applicable number of fasteners (screws or welds). Secure bottom leg (anchor bolt hole) to structure using prepunched holes provided with appropriate fastener type and number of fasteners according to design based on load requirements.








EasyClip D-Series Anchor Clip

EasyClip™ D-Series™ Anchor Clips and T-Series™ Tall Anchor Clips										
D 1 - 1	Thic	kness	6: (:)	D 1 1 D /D 1 -						
Product code	Mils (Gauge)	Design thickness (in)	Size (in)	Packaging Pcs./Bucket						
D683	68mils (14ga)	0.0713	2 x 2 x 3-1/2	40						
T683	68mils (14ga)	0.0713	2 x 4 x 3-1/2	40						
D685	68mils (14ga)	0.0713	2 x 2 x 5-1/2	40						
T685	68mils (14ga)	0.0713	2 x 4 x 5-1/2	40						
D973	97mils (12ga)	0.1017	2 x 2 x 3-1/2	40						
T973	97mils (12ga)	0.1017	2 x 4 x 3-1/2	40						
D975	97mils (12ga)	0.1017	2 x 2 x 5-1/2	40						
T975	97mils (12ga)	0.1017	2 x 4 x 5-1/2	40						

		Stud		F1 (Shear), (lbs)			F2 (Tension), (lbs)	M (Momer	nt), (in-lbs)
Product code	Stud thickness Mils (Gauge)	Fy			Number of #10-10	6 Screws to Stud			Kwik-Cons/	1/2" Dia.
	Milis (Gauge)	(kśi)	4	6	10	4	6	10	screws	Kwik-Bolts
	33mils (20ga)	33	374	466	664*	444	444	444	1418	1068
D683	43mils (18ga)	33	556	692*	986*#	444	444	444	1675	1068
D083	54mils (16ga)	33	783*	974*#	1389*#	444	444	444	1675	1068
	54mils (16ga)	50	1107*#	1377*#	1962*#	444	444	444	1675	1068
	33mils (20ga)	33	374	466	664	560	840	889	1418	1418
D973	43mils (18ga)	33	556	692	986*	832	889	889	2107*	2054
D9/3	54mils (16ga)	33	783	974*	1389*#	889	889	889	2447*	2054
	54mils (16ga)	50	1107*	1377*#	1962*#	889	889	889	2447*	2054
	33mils (20ga)	33	280	383	604	444	444	444	1787*	1106
T/00	43mils (18ga)	33	416	569	897	444	444	444	2072*	1106
T683	54mils (16ga)	33	586	802*	1264*#	444	444	444	2072*	1106
	54mils (16ga)	50	828*	1133*#	1786*#	444	444	444	2072*	1106
	33mils (20ga)	33	280	383	604	560	840	889	1787*	1787
T072	43mils (18ga)	33	416	569	897	832	889	889	2527*	2110
T973	54mils (16ga)	33	586	802	1264*	889	889	889	2527*	2110
	54mils (16ga)	50	828	1133*	1786*#	889	889	889	2527*	2110
	33mils (20ga)	33	456	599	879	560	698	698	2019	2019
D/0F	43mils (18ga)	33	677	890	1306*	698	698	698	2865*	2234
D685	54mils (16ga)	33	954	1254*	1839*#	698	698	698	2865*	2234
	54mils (16ga)	50	1348*	1772*	2599*#%	698	698	698	2865*	2234
	33mils (20ga)	33	456	599	879	560	840	889	2019	2019
D07F	43mils (18ga)	33	677	890	1306*	832	889	889	2999*	2999
D975	54mils (16ga)	33	954	1254*	1839*#	889	889	889	3477*	3167
	54mils (16ga)	50	1348*	1772*	2599*#%	889	889	889	3477*	3167
	33mils (20ga)	33	337	445	678	560	698	698	2298*	1968
T/05	43mils (18ga)	33	501	661	1008*	698	698	698	3415*	1968
T685	54mils (16ga)	33	706	931	1420*	698	698	698	3509*	1968
	54mils (16ga)	50	997*	1316*	2006*#%	698	698	698	3509*	1968
	33mils (20ga)	33	337	445	678	560	840	889	2298*	2298
T975	43mils (18ga)	33	501	661	1008*	832	889	889	3415*	3059
19/5	54mils (16ga)	33	706	931	1420*	889	889	889	4416*	3059
	54mils (16ga)	50	997*	1316*	2006*#%	889	889	889	4416*	3059






Figure 1 Kwik-Cons




Figure 2 #12-24 screws




Figure 3 Kwik-Bolts

- 1 Capacities listed in the table/notes assume that no load reductions are required for spacing or edge distance of Kwik-Cons, screws, or Kwik-Bolts.
- 2 An " * " in the shear column indicates that the shear capacity is limited to 642 lbs for D683 and T683 clips, 917 lbs for D973 and T973 clips, and 994 lbs for D685, D975, T685, and T975 clips when using 1/4" x 1-3/4" Hilti® Kwik-Cons to 3000psi concrete as shown in Figure 1.
- 3 A "#" in the shear column indicates that the shear capacity is limited to 963 lbs for D683 and T683 clips, 1374 lbs for D973 and T973 clips, and 1816 lbs for D685, D975, T685, and T975 clips when using #12-24 self-tapping screws to 3/16" A36 steel as shown in Figure 2.
- **4** A " % " in the shear column indicates that the shear capacity is limited to 1970 lbs when using 1/2" x 2-1/4" Hilti Kwik-Bolts to 3000psi concrete as shown in Figure 3.
- **5** A " $^{\circ}$ " in the moment column indicates that moment capacity is limited to 1706 in.-lb. for 3" clips, and 2231 in.-lb. for 5" clips when using 1/4" x 1-3/4" Hilti-Cons to 3000psi concrete as shown in Figure 1.

- 6 Tabulated moment capacity is limited to a serviceability of 0.02 radians, or 1.1 degrees of rotation at the connection.
- 7 For 20 and 18 gauge studs, the tabulated moment capacity is based on 18 gauge minimum base track, with (1) #10-16 screw at each track leg to stud flange. For 16 gauge and heavier studs, the base track shall be 14 gauge minimum.
- ${\bf 8}$ Tabulated moment capacity is based on a stud to clip connection using (6) #10-16 screws.
- **9** For single-bolt connections, rotational restraint must be provided by the base track.
- 10 For 14 gauge (68mils) and 12 gauge (97mils), use the tabulated values for 16 gauge (54mils), 50ksi studs.
- 11 It is the responsibility of the designer to properly detail connections on the contract drawings.
- $\textbf{12} \ \mathsf{Use} \ \mathsf{a} \ \mathsf{linear} \ \mathsf{interaction} \ \mathsf{equation} \ \mathsf{for} \ \mathsf{connections} \ \mathsf{involving} \ \mathsf{any} \ \mathsf{combination} \ \mathsf{of} \ \mathsf{F1}, \ \mathsf{F2}, \ \mathsf{and} \ \mathsf{M}.$
- ${\bf 13}\ {\sf Hilti}\ {\sf is}\ {\sf a}\ {\sf registered}\ {\sf trademark}\ {\sf of}\ {\sf Hilti}\ {\sf Aktiengeseilschaft}\ {\sf Corporation}.$

FastBridge™ Clip

Secures U-channel (cold-rolled channel) framing members for load-bearing or curtain wall applications.

The Clark Dietrich Fast Bridge clip is used to secure U-Channel or Cold-Rolled Channel (CRC) to structural or non-structural wall studs when used in load-bearing, curtain wall or drywall framing applications. The wall stud friction fit design allows for as little as one screw for the connection to the U-channel.

The FastBridge clip is a stiffened, G90 galvanized steel clip that's tested and designed to facilitate the rapid, efficient installation of 1-1/2" U-channel lateral bracing for exterior curtain wall framing, load-bearing walls or interior partitions constructed of structural or non-structural studs.

- FB33 for use with 20ga-16ga structural studs or ProSTUD® Drywall Studs
- FB43 for use with 20ga-16ga structural studs
- FB68 for use with 16ga-12ga structural studs

MATERIAL SPECIFICATIONS

Gauge: 20 gauge STR (33mils)

Design Thickness: 0.0346 inches

Gauge: 18 gauge (43mils)

Design Thickness: 0.0451 inches

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Coating: G90 ASTM: A653

ALTERNATIVE PRODUCTS

- Spazzer® 5400 and 9200 Bridging Bar
- U-Channel with SwiftClip™ LS-Series™ Support Clip
- EasyClipTM U-SeriesTM Clips

INSTALLATION

U-Channel is inserted into the stud punchout (spacing as specified by design) and rotated into place (leg down). Place the FastBridge Clip inside the punchout (stiffened wings down) and twist allowing the friction fit design to hold the clip into place. The clip must be firmly seated over the top web of the U-channel. FastBridge clips are fastened using #10 self-drilling screws driven through the clip hole into the U-channel. More than one screw may be need depending on design. The FastBridge clip should not be used in studs over 8" wide.



FastBridge™ Clip Angles (FB)

		Th	ickness			Packaging pcs./bucket	
Product code	Mils (Gauge)	Yield strength	Design thickness (in)	Min. thickness (in)	Knockout size		
FB33	33mils (20ga STR)	33ksi	0.0346	0.0329	1-1/2"	200	
FB43	43mils (18ga)	50ksi	0.0451	0.0428	1-1/2"	200	
FB68	68mils (14ga)	50ksi	0.0713	0.0677	1-1/2"	200	

U.S. Patent No. D692,746 and Canadian Patent No. 152,547



FastBridge™ Clip Angles (FB43) Allowable Clip Capacities (lbs)

D 1	No. of screws to	6. 11. 16.	All II . S	S	tud Thickness and Yield Strengt	:h
Product code	steel framing	Stud depth (in)	Allowable connector capacity	33mils (20ga)	43mils (18ga)	54mils (16ga)
	1		A : LD C::CC (II (')	1140	1330	2270
	2		Axial Brace Stiffness (lbs/in)	1220	1480	2270
FB43	1	3.625	A.:-I B Stth (Ib-)	178	210	273
FB43	2	3.025	Axial Brace Strength (lbs)	275	318	424
	1		Torsional Moment (in-lbs)	148	182	208
	2		Torsional Moment (In-IDS)	331	430	556
	1	4.00	Axial Brace Stiffness (lbs/in)	1030	1460	2170
	2		Axiai Drace Stiffness (IDS/In)	1190	1520	3030
FB43	1		Axial Brace Strength (lbs)	191	213	263
FD43	2		Axiai Brace Strength (ibs)	283	321	426
	1		Torsional Moment (in-lbs)	137	182	234
	2		TOTSIONAL PROTIENT (III-IDS)	403	403	498
	1		Axial Brace Stiffness (lbs/in)	790	990	1730
	2		Axial Brace Stiffness (Ibs/in)	990	1160	1930
FB43	1	6.00	A.:- B Stth (lb-)	107	214	290
FD43	2	0.00	Axial Brace Strength (lbs)	263	324	450
	1		Torsional Moment (in-lbs)	166	170	172
	2		i orsional /vioment (in-lbs)	296	406	567
	1		Axial Brace Stiffness (lbs/in)	_	750	1910
	2		Axiai Drace Stiffness (Ibs/in)	_	750	1960
FB43	1	8.00	A.:- B Stth (lb-)	_	212	272
FD43	2		Axial Brace Strength (lbs)	_	302	438
	1		Torsional Moment (in-lbs)	-	152	343
	2		TOTSIONAL INTOMENT (IN-IDS)	_	461	526

FastBridge™ Clip Angles (FB68) Allowable Clip Capacities (lbs)

Product code	No. of screws to	Second decode (Co.)	Allowable composter consitu	S	tud Thickness and Yield Strengt	h
Product code	steel framing	Stud depth (in)	Allowable connector capacity	54mils (16ga)	68mils (14ga)	97mils (12ga)
	1		A : LD	3410	4410	6270
	2		Axial Brace Stiffness (lbs/in)	4010	6880	7585
FB68	1	3.625	A : LD	465	520	573
FBO8	2	3.025	Axial Brace Strength (lbs)	665	732	823
	1		T : 144 . C !! >	332	440	435
	2		Torsional Moment (in-lbs)	735	894	1150
	1		V : TD C::tt (II \(\))	3060	3440	6740
	2	4.00	Axial Brace Stiffness (lbs/in)	3710	4670	8960
FB68	1		Axial Brace Strength (lbs)	475	505	505
	2			676	752	878
	1		Torsional Moment (in-lbs)	382	462	564
	2		Torsional Moment (In-Ibs)	724	802	938
	1		A : LD	2270	3240	3200
	2		Axial Brace Stiffness (lbs/in)	2710	3870	3530
FB68	1	6.00	A : LD	468	506	515
FBO8	2	0.00	Axial Brace Strength (lbs)	682	788	885
	1		Torsional Moment (in-lbs)	294	412	670
	2		Torsional (vioment (in-lbs)	686	758	1004
	1		A.:- B \$+:ff (-/:-)	1940	2500	2530
	2		Axial Brace Stiffness (lbs/in)	1960	2810	3015
FB68	1	8.00	A.:- B St + + (lh -)	463	510	517
FD08	2		Axial Brace Strength (lbs)	637	747	898
	1		Torsional Moment (in-lbs)	310	512	674
	2		i orsional ivioment (in-lbs)	682	788	963

- 1 Allowable loads are based on the use of cold-formed steel studs with a minimum yield strength of Fy=33ksi and tensile strength of Fu=45ksi for 43mils (18ga) or thinner; and a minimum yield strength Fy=50ksi and tensile strength Fu=65ksi for 54mils (16ga) or thicker.
- 2 Allowable loads are based on 54mils (16ga) u-channel bridging with a minimum yield strength Fy=33ksi and tensile strength Fu=45ksi.
- 3 Allowable loads are for the bridging connection only. The strength and serviceability of the framing members is the responsibility of the designer.
- 4 Allowable loads are based on #10 self-drilling screws with a nominal diameter of 0.190 in. and a washer diameter of 0.375 in. Fasteners must have a minimum nominal shear strength of Pss=1718 lbs and a nominal tensile strength of Pts=2654 lbs.
- 5 Allowable loads may not be increased for wind or seismic load.
- 6 Allowable loads are for use when using ASD design methodology. For LRFD loads, multiply ASD allowable loads by 1.6.
- 7 Allowable brace loads are based on ultimate test loads divided by a safety factor. Serviceability limits are not considered. Brace stiffness requirements are detailed in AISI S100 Section D3.3.
- 8 Axial brace stiffness values apply to both ASD and LRFD designs.

H-Series™ Universal Header Hanger

Connect box headers to jambs or beams to columns.

The H-Series™ universal header hanger is used to connect box headers to jambs or beams to columns and transfer large vertical loads. This universal hanger is designed so one part can be used for either side of the connection. The hanger also features a support tab for proper alignment and easy installation.

The H-Series hanger is also prepunched with a series of round, square and triangle holes to ensure proper fastener placement for specified loads.

ALTERNATIVE PRODUCTS

HDS° Framing System, HDSC Header Bracket, GP-Series™ Unpunched Gusset Plate

PRODUCT DIMENSIONS

6" x 8-1/2"

MATERIAL SPECIFICATIONS

Gauge: 18 gauge (43mils)

Design Thickness: 0.0451 inches

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Coating: G90

Yield Strength: 33ksi for 18 gauge


50ksi for 14 & 16 gauge

ASTM: A653/A653M

INSTALLATION

Install the H-Series universal header hanger to the jamb studs with the required number of screws as needed to achieve required loading. Normally two connectors are required, one on each side of the header.


Position header on header support tabs and secure header to header hanger with number of fasteners required by design.



H-Series Universal Header Hanger

H-Series™ Universal Header Hangers

	Thic	kness		D 1 1	
Product code	Mils (Gauge)	Design thickness (in)	Size (in)	Packaging Pcs./Bucket	
H436	43mils (18ga)	0.0451	6 x 8-1/2	50	
H546	54mils (16ga)	0.0566	6 x 8-1/2	50	
H686	68mils (14ga)	0.0713	6 x 8-1/2	50	



Allowable Loading Chart for Single Connectors

	F .	F .	10 S	crews	20 S	crews	30 S	crews
Connector	Framing Mils (Gauge)	Framing Fy (ksi)	Jamb capacity	Header capacity	Jamb capacity	Header capacity	Jamb capacity	Header capacity
	33mils (20ga)	33	561	307	1121	507	1361	637
10	43mils (18ga)	33	832	455	1361	753	1361	945
H436 Using #10"-16" Screws	F4 :1 (16)	33	832	455	1361	753	1361	945
.s. S.	54mils (16ga)	50	832	455	1361	753	1361	945
16	68mils (14ga)	33	832	455	1361	753	1361	945
₹6	Oomiis (14ga)	50	832	455	1361	753	1361	945
#	97mils (12ga)	33	832	455	1361	753	1361	945
		50	832	455	1361	753	1361	945
	33mils (20ga)	33	561	307	1121	507	1682	637
v	43mils (18ga)	33	832	455	1664	753	2496	945
H546 Using #10"-16" Screws	54mils (16ga)	33	1172	641	2345	1061	2634	1332
ي ٌ ي		50	1682	919	2634	1522	2634	1910
-16 -16	68mils (14ga)	33	1655	905	2634	1498	2634	1880
π.6	Oomiis (14ga)	50	1682	919	2634	1522	2634	1910
#	97mils (12ga)	33	1682	919	2634	1522	2634	1910
	9711111S (12ga)	50	1682	919	2634	1522	2634	1910
	33mils (20ga)	33	630	344	1260	570	1890	716
LA.	43mils (18ga)	33	935	511	1870	846	2805	1062
re w	54mils (16ga)	33	1318	720	2635	1193	3821	1497
N. S.	54mis (10ga)	50	1997	1091	3821	1807	3821	2268
H686 Using 1/4"-14" Screws	68mils (14ga)	33	1860	1017	3720	1684	3821	2113
ĭ. ⁷	Commis (14ga)	50	2818	1541	3821	2551	3821	3201
-	97mils (12ga)	33	2818	1541	3821	2551	3821	3201
	2711111s (12ga)	50	2818	1541	3821	2551	3821	3201

Notes:

- 1 To determine the connection capacity, use the minimum value from the jamb and header columns. For instance, using an H686 for the 30-screw option with a 16 gauge, 50ksi jamb stud and a 12 gauge, 50ksi header, the allowable load per plate is 3201 lbs (i.e., the minimum of 3821 lbs for the jamb and 3201 lbs for the header).
- 2 For the H436 and the H546, the tabulated capacity is based on #10-16 screws with an ultimate screw shear capacity of 1400 lbs per screw. For the H686, the tabulated capacity is based on 1/4"-14 screws with an ultimate screw shear capacity of 2600 lbs per screw.
- **3** H436 connectors are 33ksi, H546 and H686 connectors are 50ksi.
- 4 Reference figures above for screw placement of the 10-, 20- and 30-screw options.
- **5** Values are based on a minimum of (2) back-to-back jamb studs as shown above.

SCREW OPTIONS



(6) at Header (4) at Jamb




(12) at Header (8) at Jamb



(30) Screws (18) at Header (12) at Jamb

Typical Construction Details



Visit our CAD Library at clarkdietrich.com to view or download construction details in .dwg, .dxf, and .pdf formats.

ClarkDietrich Holdown

Secure and hold down shearwalls to the structure foundation.

Clark Dietrich holdowns provide cost-effective shearwall attachment and are used to transfer tension loads between floors or from structural members to the foundation. Two-piece welded construction comes in three sizes for optimal performance. Installation is made easy with prepunched holes.

ALTERNATIVE PRODUCTS

EasyClip™ T-Series™ Tall Anchor Clip Moment Clip

PRODUCT DIMENSIONS

CD8-S, CD8-B: 2-5/8" x 11" CD10-S, CD10-B: 2-5/8" x 13-1/2" CD15-S, CD15-B: 2-5/8" x 19"

MATERIAL SPECIFICATIONS

Gauge: 7 gauge (171.3 mils) with 1/2" bearing plate

Steel Thickness: 0.1713 inches

Anchor Hole Size:

CD8-S, CD8-B, CD10-S, CD10-B: 7/8" x 1-1/8"

CD15-S, CD15-B: 1" x 1-1/8"

ASTM: A36, A1011

Coating: Envirocron® Powder Coating

INSTALLATION

Install the holdowns using anchor bolts or alternate anchorage calculated to resist the tension load for your specific application. Use steel nylon locking nuts or thread adhesive to minimize the chance of nut spin. Anchor bolt washer is not required.

For the screwed holdowns, secure the CD holdown to the steel framing member by filling all the prepunched holes with #14 self-tapping screws to achieve listed capacities.

For the bolted holdowns, secure the CD holdown to the steel framing member with 3/4" and 1/2" diameter bolts in the prepunched holes per the design load table to achieve listed capacities. Field drill holes in the framing member as required to accommodate the required bolts.





Screwed Holdown

Bolted Holdown

Boundary members (back-to-back studs) shall be designed by a qualified professional. To tie back-to-back stud members together, the Designer must determine the fasteners required to bind members to act as one unit. CD holdowns can be welded per Designer's recommendation and specification. Welding procedures shall be qualified as specified in AWS D1.3.

Welded connections used for cold-formed steel structural members in which the thickness of the thinnest connected part is 0.18 inch or less shall comply to AISI S100-2012 specification Section E2.

Reference section R603.9.4.2 of the International Residential Code (IRC) for holdown requirements in residential applications. Consult the engineer of record for commercial applications.

Clark	Dietrich H					
Product	TI	nickness	Size (in)	Packaging		
code	Mils (Gauge) Design thickness (in		Size (III)	i ackaging		
CD8-S	171.3mils (7ga)	0.188	2-5/8 x 11	Б		
CD10-S	171.3mils (7ga)	0.188	2-5/8 x 13-1/2	Dependent on Order Quantity		
CD15-S	171.3mils (7ga)	0.188	2-5/8 x 19	Order Quantity		


Product code	TH	nickness	Size (in)	Packaging	
	Mils (Gauge)	Design thickness (in)	Size (in)		
CD8-B	171.3mils (7ga)	0.188	2-5/8 x 11		
CD10-B	171.3mils (7ga)	0.188	2-5/8 x 13-1/2	Dependent on Order Quantity	
CD15-B	171.3mils (7ga)	0.188	2-5/8 x 19	Order Quantity	







SOURCES OF DEFLECTION AT THE SHEARWALL HOLDOWN CONNECTIONS:

- A Eccentricity in stud—when a holdown is installed on only one side of the stud, an eccentricity exists during loading that can cause additional movement in the shearwall system.
- **B** Nut spin—unrestrained anchor bolt nuts can spin loose during cyclic loading: the use of steel nylon locking nuts or thread adhesive may prevent nut spin.
- C Lack of nut tightening—additional movement can occur when nuts are not tightened sufficiently.
- D Deflection of the holdown—deflection can occur in the holdown under load caused by stresses due to earthquake or high wind.
- E Vertical deflection at the holdown seat caused by stud rotation—lateral displacement at the top of the wall rotates the stud around its base causing the holdown base plate to displace vertically.



TYPICAL CONSTRUCTION DETAILS





Visit our CAD Library at clarkdietrich.com to view or download construction details in .dwg, .dxf, and .pdf formats.

ClarkDietrich Holdown

ClarkDietrich CD8-S, CD10-S, CD15-S Holdowns

SINGLE FRAMING MEMBER WITH SCREWS

		Fasteners			ASD		LRFD		
Product code Hei	Height	Anchor diameter	Stud fasteners	Stud member thickness	Tension load (lbs)	Deflection at ASD load (in)	Tension load (lbs)	Deflection at LRFD load (in)	Nominal tension load (lbs)
CD8-S 11"		7/8"	(17) #14 Screws	1-33mils (1-20ga)	1905	0.081	2860	0.107	5720
				1-43mils (1-18ga)	2485	0.057	3730	0.079	7455
	11"			1-54mils (1-16ga)	4505	0.064	6755	0.086	13510
				1-68mils (1-14ga)	5675	0.058	8510	0.079	17020
				1-97mils (1-12ga)	8095	0.051	12140	0.072	24280
			(23) #14 Screws	1-33mils (1-20ga)	2325	0.049	3490	0.066	6975
CD10-S 13-1/2"				1-43mils (1-18ga)	3030	0.034	4550	0.052	9095
	13-1/2"	7/8"		1-54mils (1-16ga)	5495	0.038	8245	0.055	16485
				1-68mils (1-14ga)	6920	0.041	10385	0.059	20765
				1-97mils (1-12ga)	9875	0.044	14810	0.062	29620
CD15-S 19"		9" 1"	(32) #14 Screws	1-33mils (1-20ga)	2675	0.025	4015	0.040	8025
				1-43mils (1-18ga)	3485	0.026	5230	0.037	10460
	19"			1-54mils (1-16ga)	6320	0.016	9480	0.030	18955
				1-68mils (1-14ga)	7960	0.025	11940	0.036	23880
				1-97mils (1-12ga)	11355	0.036	17035	0.050	34065

- 1 The designer is responsible for design checks for the substrate the Holdown is attached to and the anchorage to the substrate. The capacities listed in the table may exceed those of the substrate and/or the anchorage to the substrate.
- 2 Tabulated loads may exceed ASTM A36 or A307 anchor bolt tension capacities.
- 3 Stud/framing member design by qualified professional. Tabulated loads are based on minimum 1-5/8" wide flanged stud/framing member.
- 4 1/4" self-drilling screws can be substituted for #14 self-drilling screws.
- 5 Deflection at ASD and LRFD loads includes fastener slip, holdown elongation and anchor bolt elongation.
- 6 Nominal tension load is based on the average ultimate (peak) load from tests. AISI Lateral Design standard requires holdown to have nominal strength to resist lesser of amplified seismic load or what the system can deliver.
- 7 For ASD and LRFD loads, safety factor of 3.0 and resistance factor of 0.50 was applied.

Clark Dietrich CD8-B, CD10-B, CD15-B Holdowns SINGLE FRAMING MEMBER WITH BOLTS

		Fasteners			ASD		LRFD		
Product code	Height	Anchor diameter	Stud fasteners	Stud member thickness	Tension load (lbs)	Deflection at ASD load (in)	Tension load (lbs)	Deflection at LRFD load (in)	Nominal tension load (lbs)
CD8-B 11'		7/8"	(2) 3/4" Dia. Bolts + (1) 1/2" Dia. Bolt	1-33mils (1-20ga)	2015	0.079	2910	0.103	4475
				1-43mils (1-18ga)	2630	0.163	3795	0.211	5835
	11"			1-54mils (1-16ga)	4765	0.141	6875	0.177	10575
				1-68mils (1-14ga)	6000	0.271	8660	0.315	13325
				1-97mils (1-12ga)	8560	0.275	12355	0.317	19005
		7/8"	(3) 3/4" Dia. Bolts + (1) 1/2" Dia. Bolt	1-33mils (1-20ga)	2460	0.142	3550	0.182	5460
				1-43mils (1-18ga)	3205	0.055	4630	0.103	7120
CD10-B 13-	13-1/2"			1-54mils (1-16ga)	5815	0.126	8390	0.171	12905
				1-68mils (1-14ga)	7320	0.148	10565	0.192	16255
				1-97mils (1-12ga)	10445	0.190	15070	0.249	23185
CD15-B	19"	1"	(4) 3/4" Dia. Bolts + (1) 1/2" Dia. Bolt	1-33mils (1-20ga)	2705	0.127	3905	0.153	6005
				1-43mils (1-18ga)	3525	0.074	5090	0.105	7830
				1-54mils (1-16ga)	6395	0.121	9225	0.154	14195
				1-68mils (1-14ga)	8055	0.170	11620	0.198	17880
				1-97mils (1-12ga)	11490	0.196	16580	0.235	25505

- 1 The designer is responsible for design checks for the substrate the Holdown is attached to and the anchorage to the substrate. The capacities listed in the table may exceed those of the substrate and/or the anchorage to the substrate.
- 2 Tabulated loads may exceed ASTM A36 or A307 anchor bolt tension capacities.
- 3 Stud/framing member design by qualified professional. Tabulated loads are based on minimum 1-5/8" wide flanged stud/framing member.
- 4 At a minimum, bolts to framing/stud connection shall comply with ASTM A307. Both 3/4-inch diameter and 1/2" diameter bolt shall be used (as listed in the design table) to achieve tabulated capacities.
- 5 Deflection at ASD and LRFD loads includes fastener slip, holdown elongation and anchor bolt elongation.
- 6 Nominal tension load is based on the average ultimate (peak) load from tests. AISI Lateral Design standard requires holdown to have nominal strength to resist lesser of amplified seismic load or what the system can deliver.
- 7 For ASD and LRFD loads, safety factor of 2.22 and resistance factor of 0.65 was applied.

ClarkDietrich CD8-S, CD10-S, CD15-S Holdowns BACK-TO-BACK FRAMING MEMBER WITH SCREWS Stud member Nominal tension Product code Height Deflection at Deflection at Anchor diameter Stud fasteners thickness Tension load (lbs) Tension load (lbs) load (lbs) ASD load (in) LRFD load (in) 2-33mils (2-20ga) 0.08 11139 20885 2-43mils (2-18ga) 8164 0.07 13062 0.124 24492 (17) #14 11" CD8-S 7/8" 0.083 18005 33759 2-54mils (2-16ga) 11253 0.126 Screws 2-68mils (2-14ga) 12240 0.095 19585 0.135 36721 2-97mils (2-12ga) 12240 0.095 19585 0.135 36721 2-33mils (2-20ga) 7293 0.12 11669 0.16 21880 2-43mils (2-18ga) 9314 0.068 14902 0.106 27941 (23) #14 CD10-S 13-1/2" 7/8" 2-54mils (2-16ga) 12502 0.083 20004 0.125 37507 Screws 2-68mils (2-14ga) 12899 0.083 20638 0.127 38697 12899 2-97mils (2-12ga) 0.083 20638 0.127 38697 2-33mils (2-20ga) 7610 0.098 12177 0 125 22831 9235 0.067 14776 2-43mils (2-18ga) 0.104 27705 (32) #14 2-54mils (2-16ga) CD15-S 19" 13532 0.088 21650 0.128 40595 Screws 2-68mils (2-14ga) 13695 0.063 21911 41084 0.096 2-97mils (2-12ga) 13695 0.063 21911 0.096 41084

Notes:

- 1 The designer is responsible for design checks for the substrate the Holdown is attached to and the anchorage to the substrate. The capacities listed in the table may exceed those of the substrate and/or the anchorage to the substrate.
- 2 Tabulated loads may exceed ASTM A36 or A307 anchor bolt tension capacities.
- 3 Stud/framing member design by qualified professional. Tabulated loads are based on minimum 1-5/8" wide flanged stud/framing member.
- 4 1/4" self-drilling screws can be substituted for #14 self-drilling screws.
- **5** Deflection at ASD and LRFD loads includes fastener slip, holdown elongation and anchor bolt elongation.
- 6 Nominal tension load is based on the average ultimate (peak) load from tests. AISI Lateral Design standard requires holdown to have nominal strength to resist lesser of amplified seismic load or what the system can deliver.
- **7** For ASD and LRFD loads, safety factor of 3.0 and resistance factor of 0.50 was applied.

ClarkDi	etrich	CD8-B, C	CD10-B, CD	15-B Holdov	vns BACK	K-TO-BACK	FRAMING ME	MBER WITH	BOLTS
Product code	Height	Fasteners		C. I. I	ASD		LRFD		N . 1
		Anchor diameter	Stud fasteners	Stud member thickness	Tension load (lbs)	Deflection at ASD load (in)	Tension load (lbs)	Deflection at LRFD load (in)	Nominal tension load (lbs)
		7/8"	(2) 3/4" Dia. Bolts + (1) 1/2" Dia. Bolt	2-33mils (2-20ga)	4030	0.206	5820	0.243	8950
				2-43mils (2-18ga)	5255	0.149	7585	0.192	11670
CD8-B	11"			2-54mils (2-16ga)	9530	0.182	13750	0.240	21155
				2-68mils (2-14ga)	12005	0.268	17325	0.333	26650
				2-97mils (2-12ga)	13650	0.286	19700	0.368	30305
		7/8"	(3) 3/4" Dia. Bolts + (1) 1/2" Dia. Bolt	2-33mils (2-20ga)	4920	0.222	7100	0.274	10920
				2-43mils (2-18ga)	6410	0.264	9255	0.314	14235
CD10-B	13-1/2"			2-54mils (2-16ga)	11625	0.260	16775	0.313	25810
				2-68mils (2-14ga)	14645	0.201	21130	0.258	32510
				2-97mils (2-12ga)	15045	0.205	21715	0.263	33405
		1"	(4) 3/4" Dia. Bolts + (1) 1/2" Dia. Bolt	2-33mils (2-20ga)	5410	0.166	7810	0.193	12015
CD15-B				2-43mils (2-18ga)	7055	0.202	10180	0.235	15660
	19"			2-54mils (2-16ga)	12790	0.175	18455	0.228	28390
				2-68mils (2-14ga)	16110	0.208	23245	0.270	35760
				2-97mils (2-12ga)	17685	0.222	25520	0.290	39265

- 1 The designer is responsible for design checks for the substrate the Holdown is attached to and the anchorage to the substrate. The capacities listed in the table may exceed those of the substrate and/or the anchorage to the substrate.
- 2 Tabulated loads may exceed ASTM A36 or A307 anchor bolt tension capacities.
- 3 Stud/framing member design by qualified professional. Tabulated loads are based on minimum 1-5/8" wide flanged stud/framing member and the minimum stud thickness for fastener connection.
- 4 At a minimum, bolts to framing/stud connection shall comply with ASTM A307. Both 3/4-inch diameter and 1/2" diameter bolt shall be used (as listed in the design table) to achieve tabulated capacities.
- 5 Deflection at ASD and LRFD loads includes fastener slip, holdown elongation and anchor bolt elongation.
- 6 Nominal tension load is based on the average ultimate (peak) load from tests. AISI Lateral Design standard requires holdown to have nominal strength to resist lesser of amplified seismic load or what the system can deliver.
- **7** For ASD and LRFD loads, safety factor of 2.22 and resistance factor of 0.65 was applied.

Holdown Plate

Secure and hold down structural steel endposts between floors or to the foundation embed plate (by others).

Clark Dietrich HDP holdown plates are designed for taller construction and higher tension loads; transferring the tension loads between floors or from structural members to the foundation embed plate (by others). The HDP holdown plates are pre-punched and available in six sizes that can be bolted or welded. They can be used for panelized construction or stick-built construction.

ALTERNATIVE PRODUCTS

ClarkDietrich Holdown

PRODUCT DIMENSIONS

300HDP025: 1/4" x 3" X 24" **300HDP038**: 3/8" x 3" X 24" **300HDP050**: 1/2" x 3" X 30" **500HDP025**: 1/4" x 5" X 24" **500HDP038**: 3/8" x 5" X 24" **500HDP050**: 1/2" x 5" X 30"

MATERIAL SPECIFICATIONS

Steel Thickness: 1/4", 3/8" and 1/2" Plate

Bolt Hole Size: 13/16"

ASTM: 1/4" and 3/8" A36 Plate

1/2" A572 Gr50 Plate

Coating: Envirocron® Powder Coating

INSTALLATION

Field trimming, welding or drilling will be required when installing holdown plates. When trimming cold-formed steel, use a grinder or plasma cutter. No torch cutting.

Clean all trimmed, cut, drilled and welded areas and paint with a zinc-rich (cold galvanize) paint.

Endpost must align from level to level and holdown plates set flat on the post components before welding or bolting.

Holdown plates are intended for tension loads and not tested for compression loads. Endposts with bearing gaps must have a structural shim installed for full compression load path.





CD holdown plates can be welded or bolted, but a designer of record shall check the endpost connection capacity and provide a specific connection detail for each project.

Welding to cold-formed steel endpost members shall be with 97 mils (50Ksi) minimum with a maximum weld size of 1/8" fillet. Welder shall be certified for sheet steel welding.


ClarkDietrich Holdown Plate (HDP) - 3" Wide


Product code	Thickness	Width	Length	Holes per End	Packaging
300HDP025	1/4"	3"	24"	2	250
300HDP038	3/8"	3"	24"	3	200
300HDP050	1/2"	3"	30"	4	100

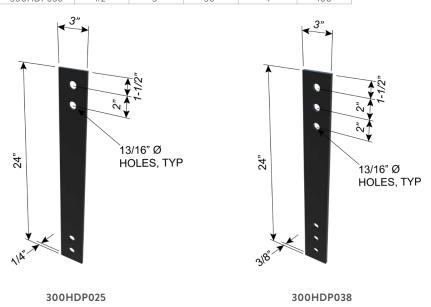



Clark Dietrich Holdown Flate (HDF) - 5 Wide								
Product code	Thickness	Width	Length	Holes per End	Packaging			
500HDP025	1/4"	5"	24"	3	150			
500HDP038	3/8"	5"	24"	4	100			
500HDP050	1/2"	5"	30"	6	50			

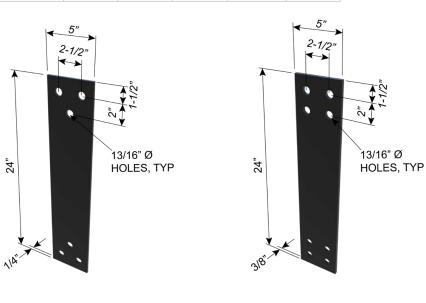



500HDP025 500HDP038 500HDP050


Holdown Plate


Holdown Plate (HDP): Bolted Plate Dimensions and Properties **HDP Tension Capacities** Tensile Thickness LRFD load, Product code Width Length Yield Strength Nominal Strength, ASD load, Strength (ksi) Each End (in) (in) (in) (ksi) kips kips kips 300HDP025 0.250 24 (2) 3/4" Bolts 27.00 15.86 23.79 58 300HDP038 0.375 24 36 58 (3) 3/4" Bolts 40.50 23.79 35.68 300HDP050 0.500 30 50 65 (4) 3/4" Bolts 71.09 35.55 53.32 500HDP025 0.250 5 24 36 58 (3) 3/4" Bolts 45.00 24 47 36 70 500HDP038 0.375 24 36 58 (4) 3/4" Bolts 67.50 36.70 55.05 500HDP050 0.500 30 50 (6) 3/4" Bolts 109.69 54.84 82.27

Notes:

- 1 Listed capacities are based on AISI S100-16 (2020) w/S2-20 and ANSI/AISC 360-16.
- 2 Limitations of hole spacing and edge distance are per ANSI/AISC 360-16 Section J3.
- 3 HDP025 and HDP038 plates use A36 steel, HDP050 plate use A572-Gr50 steel.
- 4 For fasteners, use 3/4" x 2-1/2" A325T (full thread) bolts with F436 washers and A563 heavy hex nut.
- 5 Nominal strengths are controlled by HDP plate tensile yielding.
- 6 ASD and LRFD loads are controlled by HDP plate tensile rupture.
- 7 Capacities listed for HDP plate and bolt only, substrate connection capacities should be checked separately.

TYPICAL CONSTRUCTION DETAILS

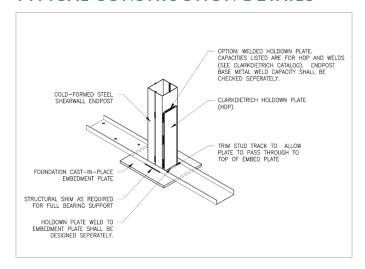

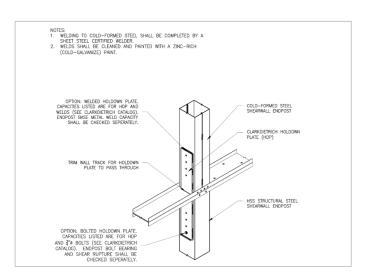

Visit our CAD Library at clarkdietrich.com to view or download construction details in .dwg, .dxf, and .pdf formats.

Holdown Plate (HDP): Welded

		Plate I	Dimensions an	d Properties		Size of Weld	HDP W	ASD load, kips LRFD load, kips 16.17 24.30 24.25 36.45 44.91 67.50 26.95 40.50	
Product code	Thickness (in)	Width (in)	Length (in)	Yield Strength F (ksi)	Tensile Strength F _u (ksi)		Nominal Strength, kips	,	Dload, kips 6.17 24.30 4.25 36.45 4.91 67.50 6.95 40.50 0.42 60.75
300HDP025	0.250	3	24	36	58	1/8"	27.00	16.17	24.30
300HDP038	0.375	3	24	36	58	3/16"	40.50	24.25	36.45
300HDP050	0.500	3	30	50	65	5/16"	75.00	44.91	67.50
500HDP025	0.250	5	24	36	58	1/8"	45.00	26.95	40.50
500HDP038	0.375	5	24	36	58	3/16"	67.50	40.42	60.75
500HDP050	0.500	5	30	50	65	5/16"	125.00	74.85	112.50

	Longitudinal Weld Length/Side							
Product code	Nominal Strength (in)	ASD load (in)	LRFD load (in)					
300HDP025	5	6	6					
300HDP038	5	6	6					
300HDP050	5	5	5					
500HDP025	8	9	9					
500HDP038	8	9	9					
500HDP050	7	9	9					

Notes

- 1 Listed capacities and weld lengths are based on AISI S100-16 (2020) w/S2-20 ans ANSI/AISC 360-16.
- 2 Listed capacities applicable for Fillet Welds only.
- 3 Listed capacities are based on E60xx or E70xx electrodes for A36 steel plates, E70XX electrodes for A572-Gr50 steel plates.
- **4** Limitations of weld size (thickness of weld) are per ANSI/AISC 360-16 Section J2.
- 5 HDP025 and HDP038 plates use A36 steel, HDP050 plate use A572-Gr50 steel.
- **6** Weld capacities are controlled by HDP plate tensile yielding.
- **7** Capacities listed for HDP plate only, substrate connection capacities should be checked separately.

ClarkDietrich Moment Clip

Moment connection for knee walls and shear walls to the structure foundation.

Clark Dietrich moment clips are high-performance, cost effective solutions for knee wall-to-foundation connections and shear wall-to-foundation connections. These multi-application clips feature a 1/4" thick A36 steel stiffening plate that provides superior design values for maximum performance. The moment clips are designed to resist horizontal, torsional and vertical (uplift) loads. These clips are prepunched with a series of attachment holes for steel framing connections and a 1/2" anchor bolt hole for foundation connections.

PRODUCT DIMENSIONS

2" x 4" x 3-1/2"

2" x 4" x 5-1/2"

2" x 4" x 7-1/2"

1/4" A36 steel stiffening plate

1-3/4" x 3-3/8"

1-3/4" x 5-3/8"

1-3/4" x 7-3/8"

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Gauge: 12 gauge (97mils)

Design Thickness: 0.1017 inches

Gauge: 10 gauge (118mils)

Design Thickness: 0.1242 inches

Coating: G90

Yield Strength: 50ksi


ASTM: A36, A653, A1003

INSTALLATION

Secure the Moment Clip to the steel framing member by using #12 screws in the prepunched holes. Number of screws and screw pattern is based on load required to achieve listed capacities.

Place 1/4" steel stiffening plate on top of short leg of Moment Clip so anchor holes are aligned.

Secure 1/4" steel stiffening plate and Moment Clip to foundation using 1/2" x 2" long Hilti Kwik-Bolt 3 or alternate anchorage calculated to resist the tension load for your specific application.

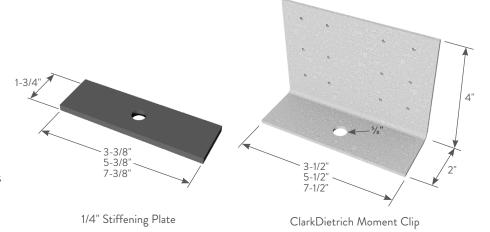

ClarkDietrich Moment Clip w/ Stiffening Plate

ClarkDietrich Moment Clips (MC Series)

Product	Thick	ness	Size (in)	Packaging
code	Mils (Gauge)	Design thickness (in)	3126 (111)	Pcs./Bucket
MC683P	68mils (14ga)	0.0713	2" x 4" x 3-1/2"	25
MC685P	68mils (14ga)	0.0713	2" x 4" x 5-1/2	25
MC687P	68mils (14ga)	0.0713	2" x 4" x 7-1/2"	25
MC973P	97mils (12ga)	0.1017	2" x 4" x 3-1/2"	25
MC975P	97mils (12ga)	0.1017	2" x 4" x 5-1/2"	25
MC977P	97mils (12ga)	0.1017	2" x 4" x 7-1/2"	25
MC103P	68mils (14ga)	0.1242	2" x 4" x 3-1/2"	25
MC105P	97mils (12ga)	0.1242	2" x 4" x 5-1/2"	25
MC107P	118mils (10ga)	0.1242	2" x 4" x 7-1/2"	25

ClarkDietrich Momer	t Clips Allowable Loads
---------------------	-------------------------

	Stud member		F1	(Shear), (Ik	os)	F2	(Tension), (lbs)	W (V	Noment), (ii	n-lbs)	Rotational stiffness for
Product code	thickness	Stud Fy (ksi)		No	umber of #12	2 screws to st	ud		1/2" dia	. anchor to s	structure	wind deflection
	Mils (Gauge)		4	6	12	4	6	12	4	6	12	(in-lbs/radian)
	33mils (20ga)	33	372	508	840	754	1131	2261²	1401	1784	2462³	
MC683P	43mils (18ga)	33	554	756	1250	1122	1683²	2736²	2084³	2581³	2581³	
2" x 4" x 3-1/2"	54mils (16ga)	50	1126	1536	2086¹	2278²	2736²	2736²	2743³	2743³	2743³	133,000
68mils (14ga)	68mils (14ga)	50	1535	20861	20861	2736²	2736²	2736²	2756³	2756³	2756³	
	97mils (12ga)	50	1535	20861	2086¹	2736²	2736²	2736²	2756³	2756³	2756³	
	33mils (20ga)	33	372	508	840	754	1131	2261²	1401	1784³	2560³	
MC973P	43mils (18ga)	33	554	756	1250	1122	1683°	3365²	2084³	2655	2862³	
2" x 4" x 3-1/2"	54mils (16ga)	50	1126	1536	2538¹	2278²	3417 ²	4065°	2862³	2862³	2862³	140,100
97mils (12ga)	68mils (14ga)	50	1535	2094¹	2975¹	3107 ²	4181²	4181²	2862³	2862³	2862³	
_	97mils (12ga)	50	1535	2094¹	2975¹	3107 ²	4181²	4181²	2862³	2862³	2862³	
	33mils (20ga)	33	372	508	840	754	1131	2261²	1401	1784³	2609³	
MC103P	43mils (18ga)	33	554	756	1250	1122	1683°	3365²	2084³	2655	2945³	
2" x 4" x 3-1/2"	54mils (16ga)	50	1126	1536	2538¹	2278²	3417 ²	3828²	2945³	2945³	2945³	143,900
118mils (10ga)	68mils (14ga)	50	1535	2094¹	3462 ¹	3107 ²	3828²	3828²	2945³	2945³	2945³	
	97mils (12ga)	50	1535	2094¹	3462¹	3107²	3828²	3828²	2945³	2945³	2945³	
	33mils (20ga)	33	441	630	1029	754	1131	2261²	1778	2417	3396³	
MC685P	43mils (18ga)	33	656	937	1531	1122	1683²	2736²	2646	3597³	4993³	
2" x 4" x 5-1/2"	54mils (16ga)	50	1333	1903¹	2086¹	2278²	2736²	2736²	5307³	5307³	5307³	252,000
68mils (14ga)	68mils (14ga)	50	1818¹	20861	2086¹	2736²	2736²	2736²	5363³	5363³	5363³	
	97mils (12ga)	50	1818¹	2086¹	2086¹	2736²	2736²	2736²	5363³	5363³	5363³	
	33mils (20ga)	33	441	630	1029	754	1131	2261²	1778	2417	3396³	
MC975P	43mils (18ga)	33	656	937	1531	1122	1683°	3365°	2646	3597³	5025³	
2" x 4" x 5-1/2"	54mils (16ga)	50	1333	1903¹	2975¹	2278²	3417 ²	4181²	5373³	5980³	5980³	274,400
97mils (12ga)	68mils (14ga)	50	1818¹	2595¹	2975¹	3107 ²	4181 ²	4181²	5980³	5980³	5980³	
	97mils (12ga)	50	1818¹	2595¹	2975¹	3107 ²	4181 ²	4181²	5980³	5980³	5980³	
	33mils (20ga)	33	441	630	1029	754	1131	2261 ²	1778	2417	3396³	
MC105P	43mils (18ga)	33	656	937	1531	1122	1683°	3365°	2646	3597³	5053³	
2" x 4" x 5-1/2"	54mils (16ga)	50	1333	1903¹	3109¹	2278²	3417²	4236²	5373³	6133³	6133³	288,700
118mils (10ga)	68mils (14ga)	50	1818¹	25951	3633¹	3107²	4236²	4236²	6133³	6133³	6133³	
	97mils (12ga)	50	1818¹	2595¹	3633¹	3107²	4236²	4236²	6133³	6133³	6133³	
1164075	43mils (18ga)	33	791	1164	1928¹	1122	1683²	2736²	3646	5199³	6903³	
MC687P	54mils (16ga)	50	1606	20861	2086¹	2278²	2736²	2736²	7403³	7656³	7656³	207.600
2" x 4" x 7-1/2" 68mils (14ga)	68mils (14ga)	50	2086¹	20861	2086¹	2736°	2736²	2736²	8186³	8186³	8186³	387,600
oomiis (14ga)	97mils (12ga)	50	2086¹	20861	2086¹	2736°	2736²	2736²	8186³	8186³	8186³	
MC077P	43 mils (18ga)	33	791	1164	1928¹	1122	1683²	3365²	3646	5199³	6903³	
MC977P 2" x 4" x 7-1/2"	54mils (16ga)	50	1606	2363¹	2975¹	2278²	3417²	3875²	7403³	8979³	8979³	140,000
2 x 4 x 7-1/2 97mils (12ga)	68mils (14ga)	50	2190¹	2975¹	2975¹	3107²	3875²	3875²	8979³	8979³	8979³	449,000
Millis (IZBa)	97mils (12ga)	50	2190¹	2975¹	2975¹	3107²	3875²	3875²	8979³	8979³	8979³	
14.C407P	43mils (18ga)	33	791	1164	1928¹	1122	1683²	3365²	3646	5199	6903³	
MC107P	54mils (16ga)	50	1606	2363¹	3633¹	2278²	3417²	3835²	7403³	9180³	9180³	451,000
2" x 4" x 7-1/2" 118mils (10ga)	68mils (14ga)	50	2190¹	3223¹	3633¹	3107²	4236²	4236²	9282³	9282³	9282³	451,000
Homis (10ga)	97mils (12ga)	50	2190¹	3223¹	3633¹	3107²	4236²	4236²	9282³	9282³	9282³	

Notes:

- 1 Cells marked with a " 1" in shear column indicate that the shear capacity is limited to 1628 lbs when using 1/2" x 2" Hilti Kwik-Bolts into 3000psi concrete.
- 2 Cells marked with a " 2" in tension column indicate that the tension capacity is limited to 1509 lbs when using 1/2" x 2" Hilti Kwik-Bolts into 3000psi concrete.
- 3 Cells marked with a " 3" in the moment column indicate that the moment capacity is limited to 1761 in-lbs for 3-Series clips, 2767 in-lbs for 5-Series clips, and 3773 in-lbs for 7-Series clips when using 1/2" x 2" Hilti Kwik-Bolts into 3000psi concrete.
- 4 Capacities listed in the table/notes assume that no load reductions are required for spacing or edge distance of Kwik-Bolts.
- 5 Capacities listed in the table represent the capacity of the clip and the screws to the stud. Capacities listed in notes 1–3 are limits if the specified connector to the structure is used. Other 1/2" dia. anchors may be used to achieve the full clip capacity but must be designed separately.
- 6 Moment capacities listed as Max. load/Factor of Safety. Loads must be limited by serviceability load taken as stiffness times the serviceability limit in radians.
- 7 Stiffness is the max. allowable clip moment divided by the clip rotation measured at the max. allowable clip moment.
- $\textbf{8} \ \ \text{No stud-to-track connection is required. Higher loads can be achieved when stud-to-track is connected.}$
- 9 Use a linear interaction equation for connections involving any combination of F1, F2, and M.
- 10 Allowable loads have not been increased for wind, seismic, or other factors.
- 11 Torsional effects are considered on screw group for F1 & F2 (Shear & Tension) allowable loads.
- 12 Hilti is a registered trademark of Hilti Aktiengeseilschaft Corporation.
- 13 It is the responsibility of the designer to properly detail connections on the contract drawings.





4 Screw Pattern

6 Screw Pattern



Pony Wall Heavy (12ga)

Partial wall framing connection to the floor

The Clark Dietrich Pony Wall Heavy is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track. Out-of-plane loads are transferred to the floor system through the base-plate, which is welded to the Pony Wall Heavy stud member.

PRODUCT DIMENSIONS

PW24 = 23-3/4" tall with 3-3/8" wide x 8" long plate PW36 = 35-3/4" tall with 3-3/8" wide x 8" long plate PW48 = 47-3/4" tall with 3-3/8" wide x 8" long plate PW60 = 59-3/4" tall with 3-3/8" wide x 8" long plate

MATERIAL SPECIFICATIONS

Plate Material: ASTM A36 1/2" thick hot rolled steel Stud Material: ASTM A1011 SS Grade 50, 50ksi (340 MPa)

12ga (97mils), 0.1017" Design thickness, 0.0966" Min. thickness

Coating: Envirocron® Powder Coating

Packaging: Individually ASTM: A36, A1011


Pony Wall Heavy (PW)

	•					
Product	Thi	ckness	C: (:)	D 1 :		
code	Mils (Gauge)	Design thickness (in)	Size (in)	Packaging		
PW24	_		23-3/4"	Individually		
PW36	07 :1 (12)	0.12.12	35-3/4"	Individually Individually		
PW48	97mils (12ga)	0.1242	47-3/4"			
PW60			59-3/4"	Individually		

Pony Wall Heavy (PW) Rotational Stiffness

Product code	Member length, in	No. of Anchors	Rotational Stiffness for Wind Deflection (in-lbs/rad)*		
PW	24/36/48/60	1	945,000		
PVV	24/30/46/00	4	(in-lbs/rad)*		


^{*}Rotational stiffness is the max allowable moment divided by the Pony Wall Heavy (PW) rotation measured at the max allowable moment.



INSTALLATION

Install the Pony Wall inside the track or directly to the floor structure. Anchor to the floor as designed by EOR. Attach the studs to both flanges of the Pony Wall. A minimum of 3-1/2" stud member can be used.



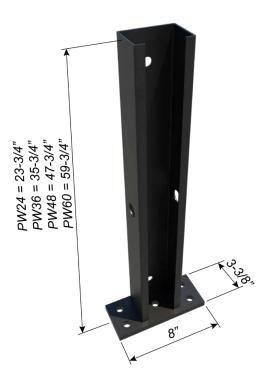

Pony Wall Heavy (PW) Allowable Loads

CONCENTRATED LOAD AT FREE END

MATERIAL SPECIFICATION:

PONY WALL HEAVY STUD

Material Thickness: 12ga (97mils), 0.1017" design thickness

Material Strength: Structural grade 50, 50ksi minimum yield strength

ASTM: A1011


PONY WALL HEAVY BASE PLATE

Material Thickness: 1/2" minimum thickness
Material Strength: 36ksi minimum yield strength

ASTM: A36

Pony Wall Heavy (PW) Allowable Loads

CONCENTRATED LOAD AT FREE END





Notes

- 1 ClarkDietrich Pony Wall Heavy is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track.
- 2 Out-of-plane loads are transferred to the floor system through the base-plate, which is welded to Pony Wall Heavy member.
- 3 ClarkDietrich Pony Wall Heavy (PW) may be used in place of standard framing members, or in conjunction with them to frame the wall.
- 4 Listed allowable loads are based on Allowable Stress Design (ASD).
- 5 Base connection between ClarkDietrich Pony Wall Heavy and support structure are designed by others.
- 6 Serviceability/deflection needs to be checked separately. To do this, designers need to consider deflection of strut (effective moment of inertia = 0.7739 in and deflection due to rotation at the base (see rotational stiffness table).
- 7 Listed maximum point load at cantilever end calculated using maximum allowable moment. When both point load and uniform loads are applied, combined loads should be limited to maximum allowable moment.
- 8 It is the responsibility of the designer to properly detail connections on the contract drawings.

Pony Wall Heavy (PW) Allowable Loads w/Anchors

CONCENTRATED LOAD AT FREE END

	D W - II			Max	point loa	d @ cant	tilever en	d, Ibs	Al	Allowable base moment, in-lbs			
Member designation	Pony Wall length, in	Anchors to structure	No. of Anchors	L/720*	L/360*	L/240*	L/180*	Max	L/720	L/360	L/240	L/180	Max
PW24	24		1	142	142	142	142	142	3,403	3,403	3,403	3,403	3,403
PVVZ4	24		4	165	330	452	452	452	3,964	7,927	10,840	10,840	10,840
PW36	36	1/2" ¢ Hilti KB1 Expansion Anchor	1	73	95	95	95	95	2,642	3,403	3,403	3,403	3,403
PVV30	30	(3-5/8" Nominal	4	73	147	220	294	301	2,642	5,285	7,927	10,569	10,840
PW48	48	Embedment,	1	41	71	71	71	71	1,982	3,403	3,403	3,403	3,403
PVV48	8 48 300	3000psi Uncracked concrete)	4	41	83	124	165	226	1,982	3,964	5,945	7,927	10,840
DW60	60	concrete	1	26	53	57	57	57	1,585	3,171	3,403	3,403	3,403
PW60	60		4	26	53	79	106	181	1,585	3,171	4,756	6,342	10,840

^{*} The values shown are based on deflection of the strut member only which has an effective moment of inertia = 0.7739 in *. For overall assembly deflection, designers also need to consider deflection due to rotation at the base. The values needed for this additional analysis are provided in the rotational stiffness table.



(1) Anchor to structure



(4) Anchors to structure

Notes:

- 1 ClarkDietrich Pony Wall Heavy is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track.
- 2 Out-of-plane loads are transferred to the floor system through base-plate, which is welded to Pony Wall member.
- 3 ClarkDietrich Pony Wall Heavy (PW) may be used in place of standard framing members, or in conjunction with them to frame the wall.
- 4 Listed allowable loads are based on Allowable Stress Design (ASD).
- 5 Serviceability/deflection needs to be checked separately. To do this, designers need to consider deflection of strut (effective moment of inertia = 0.7739 in') and deflection due to rotation at the base (see rotational stiffness table).
- 6 Above listed capacities w/anchors shall be used only when using 1/2" \$\phi\$ Hilti KB1 Expansion Anchors to concrete.
- 7 Other anchors may be used to achieve full Pony Wall Heavy capacity, but must be designed separately.
- 8 Above listed capacities have not been increased for wind, seismic, or other factors.
- 9 Hilti is a registered trademark of Hilti Aktiengeseilschaft Corporation.
- 10 It is the designer's responsibility to check for minimum concrete edge distance and minimum concrete thickness when using anchors.
- 11 It is the responsibility of the designer to properly detail connections on the contract drawings.

Pony Wall Heavy (12ga)

Pony Wall Heavy (PW) Allowable Loads

MAXIMUM ALLOWABLE LOADS

MATERIAL SPECIFICATION:

PONY WALL HEAVY STUD

Material Thickness: 12ga (97mils), 0.1017" design thickness

Material Strength: Structural grade 50, 50ksi minimum yield strength

ASTM: A1011

PONY WALL HEAVY BASE PLATE

Material Thickness: 1/2" minimum thickness
Material Strength: 36ksi minimum yield strength

ASTM: A36

Pony Wall Heavy (PW) Allowable Loads

			Strength based capacity (ASD)					
Member designation	Pony Wall Length (in)	Anchors to structure	Allowable moment, in-lbs	Max point load @ cantilever end, lbs	Max uniform live			
	24			763	763 339			
D W II	36	D : 11 .1	10.217	509				
Pony Wall	48	Designed by others	18,316	382	191			
	60			305	122			

Notes:

- 1 ClarkDietrich Pony Wall Heavy (PW) is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track.
- 2 Out-of-plane loads are transferred to the floor system through the base-plate, which is welded to Pony Wall Heavy member.
- 3 ClarkDietrich Pony Wall Heavy (PW) may be used in place of standard framing members, or in conjunction with them to frame the wall.
- 4 Listed allowable loads are based on Allowable Stress Design (ASD).
- 5 Base connection between ClarkDietrich Pony Wall Heavy and support structure are designed by others.
- 6 Serviceability/deflection needs to be checked separately. To do this, designers need to consider deflection of strut (effective moment of inertia = 0.7739 in') and deflection due to rotation at the base (see rotational stiffness table).
- 7 Listed maximum point load at cantilever end calculated using maximum allowable moment. Similarly, listed maximum uniformly distributed load calculated using maximum allowable moment. When both point load and uniform loads are applied, combined loads should be limited to maximum allowable moment.
- 8 It is the responsibility of the designer to properly detail connections on the contract drawings.


Pony Wall Heavy (PW) Allowable Loads w/Anchors

		Strength based	capacity (ASD)
Member designation	Anchors to structure	No. of Anchors to Structure	Allowable base moment, in-lbs
PW24/PW36/PW48/P60	1/2" ф Hilti KB1 Expansion Anchor	1	3,403
PW24/PW36/PW48/P6U	(3-5/8" Nominal Embedment, 3000psi Uncracked Concrete)	4	10,840

Notes

- 1 Clark Dietrich Pony Wall Heavy is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track.
- 2 Out-of-plane loads are transferred to the floor system through base-plate, which is welded to Pony Wall Heavy member.
- 3 ClarkDietrich Pony Wall Heavy (PW) may be used in place of standard framing members, or in conjunction with them to frame the wall.
- 4 Listed allowable loads are based on Allowable Stress Design (ASD).
- 5 Serviceability/deflection needs to be checked separately. To do this, designers need to consider deflection of strut (effective moment of inertia = 0.7739 in and deflection due to rotation at the base (see rotational stiffness table).
- 6 Above listed capacities w/anchors shall be used only when using 1/2" ♦ Hilti KB1 Expansion Anchors to concrete.
- 7 Other anchors may be used to achieve full Pony Wall Heavy capacity, but must be designed separately.
- 8 Above listed capacities have not been increased for wind, seismic, or other factors.
- 9 Hilti is a registered trademark of Hilti Aktiengeseilschaft Corporation.
- 10 It is the designer's responsibility to check for minimum concrete edge distance and minimum concrete thickness when using anchors.
- 11 It is the responsibility of the designer to properly detail connections on the contract drawings.





Uniformly distributed loads are based on framing members placed on each side of the Pony Wall



(1) Anchor to structure



(4) Anchors to structure

Iniformly Distributed

Pony Wall Heavy (PW) Allowable Loads

UNIFORMLY DISTRIBUTED LOAD

MATERIAL SPECIFICATION:

PONY WALL HEAVY STUD

Material Thickness: 12ga (97mils), 0.1017" design thickness

Material Strength: Structural grade 50, 50ksi minimum yield strength

ASTM: A1011

PONY WALL HEAVY BASE PLATE

Material Thickness: 1/2" minimum thickness
Material Strength: 36ksi minimum yield strength

ASTM: A36

Pony Wall Heavy (PW) Allowable Loads UNIFORMLY DISTRIBUTED LOAD Uniformly distributed load, lbs/ft Moment (ASD) due to uniform load, in-lbs Member Pony Wall Length designation (in) L/720* L/360* L/240* I /180* L/720* L/360* L/240* L/180* 24 220 440 763 763 5 285 18 316 18 316 661 10 569 15 854 Pony Wall 65 130 196 339 3,523 7,046 10,569 14,093 18.316 36 261 Heavy 48 28 55 83 110 2.642 5,285 7,927 10,569 18,316 60 28 42 56 122 2,114 4,228 6,342 8,456 18,316



Notes:

- 1 ClarkDietrich Pony Wall Heavy is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track.
- 2 Out-of-plane loads are transferred to the floor system through the base-plate, which is welded to Pony Wall member.
- 3 ClarkDietrich Pony Wall Heavy (PW) may be used in place of standard framing members, or in conjunction with them to frame the wall.
- 4 Listed allowable loads are based on Allowable Stress Design (ASD).
- 5 Base connection between ClarkDietrich Pony Wall Heavy and support structure are designed by others.
- 6 Serviceability/deflection needs to be checked separately. To do this, designers need to consider deflection of strut (effective moment of inertia = 0.7739 in⁶) and deflection due to rotation at the base (see rotational stiffness table).
- 7 Listed maximum point load at cantilever end calculated using maximum allowable moment. When both point load and uniform loads are applied, combined loads should be limited to maximum allowable moment.
- 8 It is the responsibility of the designer to properly detail connections on the contract drawings.

Pony Wall Heavy (PW) Allowable Loads w/Anchors										UNIFORMLY DISTRIBUTED LOAD			
	Pony Wall			Unif	ormly di	stribute	d Ioads, I	bs/ft	Al	lowable k	oase mon	nent, in-	lbs
Member designation	Law ask	Anchors to structure	No. of Anchors	L/720	L/360	L/240	L/180	Max	L/720	L/360	L/240	L/180	Max
PW24	24	1/2" ф Hilti KB1 Expansion Anchor	1	142	142	142	142	142	3,403	3,403	3,403	3,403	3,403
PW24	24		4	220	440	452	452	452	5,285	10,569	10,840	10,840	10,840
PW36	36		1	63	63	63	63	63	3,403	3,403	3,403	3,403	3,403
PW30	30	(3-5/8" Nominal	4	65	130	196	201	201	3,523	7,046	10,569	10,840	10,840
DWA	40	Embedment,	1	28	35	35	35	35	2,642	3,403	3,403	3,403	3,403
PW48	48	48 3000psi Uncracked concrete)	4	28	55	83	110	113	2,642	5,285	7,927	10,569	10,840
PW60	60		1	14	23	23	23	23	2,114	3,403	3,403	3,403	3,403
			4	14	28	42	56	72	2,114	4,228	6,342	8,456	10,840

^{*} The values shown are based on deflection of the strut member only which has an effective moment of inertia = 0.7739 in⁴. For overall assembly deflection, designers also need to consider deflection due to rotation at the base. The values needed for this additional analysis are provided in the rotational stiffness table.

Uniformly distributed loads are based on framing members placed on each side of the Pony Wall



(1) Anchor to structure



(4) Anchors to structure

Notes:

- 1 ClarkDietrich Pony Wall Heavy is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track.
- 2 Out-of-plane loads are transferred to the floor system through base-plate, which is welded to Pony Wall member.
- 3 ClarkDietrich Pony Wall Heavy (PW) may be used in place of standard framing members, or in conjunction with them to frame the wall
- 4 Listed allowable loads are based on Allowable Stress Design (ASD).
- 5 Serviceability/deflection needs to be checked separately. To do this, designers need to consider deflection of strut (effective moment of inertia = 0.7739 in') and deflection due to rotation at the base (see rotational stiffness table).
- ${\bf 6}$ Above listed capacities w/anchors shall be used only when using 1/2" φ Hilti KB1 Expansion Anchors to concrete.
- 7 Other anchors may be used to achieve full Pony Wall Heavy capacity, but must be designed separately.
- 8 Above listed capacities have not been increased for wind, seismic, or other factors.
- 9 Hilti is a registered trademark of Hilti Aktiengeseilschaft Corporation.
- 10 It is the designer's responsibility to check for minimum concrete edge distance and minimum concrete thickness when using anchors.
- 11 It is the responsibility of the designer to properly detail connections on the contract drawings.

Pony Wall Lite (16ga)

Partial wall framing connection to the floor

The Clark Dietrich Pony Wall Lite is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track. Out-of-plane loads are transferred to the floor system through the base-plate, which is welded to the Pony Wall Lite stud member.

PRODUCT DIMENSIONS

LGPW24 = 23-5/8" tall with 2-3/8" wide x 5-1/2" long plate LGPW36 = 35-5/8" tall with 2-3/8" wide x 5-1/2" long plate LGPW48 = 47-5/8" tall with 2-3/8" wide x 5-1/2" long plate LGPW60 = 59-5/8" tall with 2-3/8" wide x 5-1/2" long plate

MATERIAL SPECIFICATIONS

Plate Material: ASTM A36, 3/8" thick hot rolled steel Stud Material: ASTM A1011 SS Grade 50, 50ksi (340 MPa)

16ga (54mils), 0.0566" Design thickness, 0.0538" Min. thickness

Coating: Envirocron® Powder Coating


Packaging: Individually ASTM: A36, A1011

Pony Wall Lite (LGPW)									
Product	Thi	ckness	Size (in)	Packaging					
code	Mils (Gauge)	Design thickness (in)	Size (In)	Fackaging					
LGPW24			23-5/8"						
LGPW36	F4 :1 (16)	0.05//	35-5/8"	1 1: 1 11					
LGPW48	54mils (16ga)	0.0566	47-5/8"	Individually					



INSTALLATION

Install the Pony Wall Lite inside the track or directly to the floor structure. Anchor to the floor as designed by EOR. Attach the studs to both flanges of the Pony Wall Lite. A minimum of 2-1/2" stud member can be used.





Pony Wall Lite (LGPW) Allowable Loads

CONCENTRATED LOAD AT FREE END

MATERIAL SPECIFICATION:

PONY WALL LITE STUD

Material Thickness: 16ga (54mils), 0.0566" design thickness

Material Strength: Structural grade 50, 50ksi minimum yield strength

ASTM: A1011

PONY WALL LITE BASE PLATE

Material Thickness: 3/8" minimum thickness Material Strength: 36ksi minimum yield strength

ASTM: A36



Moment (ASD) due to point load, in-lbs Max 24 86 115 177 2074 2766 4253 Pony Wall 36 51 118 48 22 29 89 1037 1383 4253 60 14 18 71 830 1106 4253

Notes:

- 1 Pony Wall Lite is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track.
- 2 Out-of-plane loads are transferred to the floor system through the base-plate, which is welded to Pony Wall Lite member.
- 3 Pony Wall Lite may be used in place of standard framing members, or in conjunction with them to frame the wall.
- 4 Listed allowable loads are based on Allowable Stress Design (ASD).
- 5 Base connection between Pony Wall Lite and support structure are designed by others.
- 6 For serviceability/deflection calculations of Pony Wall Lite, use effective moment of inertia = 0.1350 in4 (54mils), 0.1626in4 (68mils)
- 7 Listed maximum point load @ cantilever end calculated using maximum allowable moment. When both point load and uniform loads are applied, combined loads should be limited to maximum allowable moment.
- 8 It is the responsibility of the designer to properly detail connections on the contract drawings.

Pony \	Wall Lit	te (LGPW) Allowa	ble Loa	ads w/A	nchors	CONCE	NTRATE	LOAD AT	FREE END
Member	Pony Wall length,	Anchors	No. of		Aax point loa antilever end		Allowabl	le base mome	nt, in-lbs
designation		to structure	Anchors						

Member	Pony Wall length,	Anchors	No. of Anchors	Max point load @ cantilever end, lbs			Allowable base moment, in-lbs		
designation	n in	to structure		L/240	L/180	Max	L/240	L/180	Max
LGPW24	24	3/8" Hilti Kwik Bolt-3 (2-3/8" Nominal Embedment, 3000psi Uncracked concrete)	2	83	83	83	1984	1984	1984
LGPW36	36			38	51	55	1383	1844	1984
LGPW48	48			22	29	41	1037	1383	1984
LGPW60	60			14	18	33	830	1106	1984

- 1 Pony Wall Lite is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track.
- 2 Out-of-plane loads are transferred to the floor system through base-plate, which is welded to Pony Wall Lite member.
- 3 Pony Wall Lite may be used in place of standard framing members, or in conjunction with them to frame the wall.
- 4 Listed allowable loads are based on Allowable Stress Design (ASD).
- 5 For serviceability/deflection calculations of Pony Wall Lite, use effective moment of inertia = 0.1350 in (54mils), 0.1626in (68mils)
- 6 Above listed capacities w/anchors shall be used only when using 3/8" \$\phi\$ Hilti Kwik Bolt-3 anchors to concrete.
- 7 Other anchors may be used to achieve full Pony Wall Lite capacity, but must be designed separately.
- 8 Above listed capacities have not been increased for wind, seismic, or other factors.
- 9 Hilti is a registered trademark of Hilti Aktiengeseilschaft Corporation.
- 10 It is the designer's responsibility to check for minimum concrete edge distance and minimum concrete thickness when using anchors.
- 11 It is the responsibility of the designer to properly detail connections on the contract drawings.



(2) Anchors to structure

Pony Wall Lite (16ga)

Pony Wall Lite (LGPW) Allowable Loads

MAXIMUM ALLOWABLE LOADS

MATERIAL SPECIFICATION:

PONY WALL LITE STUD

Material Thickness: 16ga (54mils), 0.0566" design thickness

Material Strength: Structural grade 50, 50ksi minimum yield strength

ASTM: A1011

PONY WALL LITE BASE PLATE

Material Thickness: 3/8" minimum thickness
Material Strength: 36ksi minimum yield strength

ASTM: A36

Pony Wall Lite (LGPW) Allowable Loads

			Strength based capacity (ASD)					
Member designation	Pony Wall Length (in)	Anchors to structure	Allowable moment, in-lbs	Max point load @ cantilever end, lbs	Max uniform live (UDL) load, lbs/ft			
	24		4253	177	177			
Pony Wall	36	D : 11 .1		118	79			
Lite	48	Designed by others		89	44			
	60			71	28			

Notes:

- 1 Pony Wall Lite is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track.
- 2 Out-of-plane loads are transferred to the floor system through the base-plate, which is welded to Pony Wall Lite member.
- 3 Pony Wall Lite may be used in place of standard framing members, or in conjunction with them to frame the wall.
- 4 Listed allowable loads are based on Allowable Stress Design (ASD).
- **5** Base connection between Pony Wall Lite and support structure are designed by others.
- 6 For serviceability/deflection calculations of Pony Wall Lite, use effective moment of inertia = 0.1350 in⁴ (54mils), 0.1626in⁴ (68mils)
- 7 Listed maximum point load @ cantilever end calculated using maximum allowable moment. Similsarly, listed maximum uniformly distributed load calculated using maximum allowable moment. When both point load and uniform loads are applied, combined loads should be limited to maximum allowable moment.
- 8 It is the responsibility of the designer to properly detail connections on the contract drawings.

Pony Wall Lite (LGPW) Allowable Loads w/Anchors

Distributed Load (UDI

Uniformly distributed loads are based on framing members placed on each side of the Pony Wall

Member designation Anchors to structure No. of Anchors to Structure No. of Anchors to Structure Allowable base moment, in-lbs 3/8" \$\phi\$ Hilti Kwik Bolt-3 (2-3/8" Nominal Embedment, 2 1984

Notes:

1 Pony Wall Lite is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track.

3000psi Uncracked concrete)

- 2 Out-of-plane loads are transferred to the floor system through base-plate, which is welded to Pony Wall Lite member.
- 3 Pony Wall Lite may be used in place of standard framing members, or in conjunction with them to frame the wall.
- 4 Listed allowable loads are based on Allowable Stress Design (ASD).
- 5 For serviceability/deflection calculations of Pony Wall Lite, use effective moment of inertia = 0.1350 in⁴ (54mils), 0.1626in⁴ (68mils)
- 6 Above listed capacities w/anchors shall be used only when using 3/8" ♦ Hilti Kwik Bolt-3 anchors to concrete.
- 7 Other anchors may be used to achieve full Pony Wall Lite capacity, but must be designed separately.
- f 8 Above listed capacities have not been increased for wind, seismic, or other factors.
- 9 Hilti is a registered trademark of Hilti Aktiengeseilschaft Corporation.
- 10 It is the designer's responsibility to check for minimum concrete edge distance and minimum concrete thickness when using anchors.
- 11 It is the responsibility of the designer to properly detail connections on the contract drawings.



(2) Anchors to structure

Distributed Load (UDI

Pony Wall Lite (LGPW) Allowable Loads

UNIFORMLY DISTRIBUTED LOAD

MATERIAL SPECIFICATION:

PONY WALL LITE STUD

Material Thickness: 16ga (54mils), 0.0566" design thickness

Material Strength: Structural grade 50, 50ksi minimum yield strength

ASTM: A1011

PONY WALL LITE BASE PLATE


Material Thickness: 3/8" minimum thickness
Material Strength: 36ksi minimum yield strength

ASTM: A36

Pony Wall Lite (LGPW) Allowable Loads UNIFORMLY DISTRIBUTED LOAD Uniformly distributed load, lbs/ft Moment (ASD) due to uniform load, in-lbs Pony Wall Member Length (in) designation L/240 L/180 Max L/240 L/180 Max 2766 3688 4253 24 115 177 Pony Wall 36 34 46 79 1844 2458 4253 48 14 19 1383 1844 4253 Lite 60 10 28 1106 1475 4253

Notes:

- 1 Pony Wall Lite is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track.
- 2 Out-of-plane loads are transferred to the floor system through the base-plate, which is welded to Pony Wall Lite member.
- 3 Pony Wall Lite may be used in place of standard framing members, or in conjunction with them to frame the wall.
- 4 Listed allowable loads are based on Allowable Stress Design (ASD).
- 5 Base connection between Pony Wall Lite and support structure are designed by others.
- 6 For serviceability/deflection calculations of Pony Wall Lite, use effective moment of inertia = 0.1350 in (54mils), 0.1626in (68mils)
- 7 Listed maximum uniformly distributed load calculated using maximum allowable moment. When both point load and uniform loads are applied, combined loads should be limited to maximum allowable moment.
- 8 It is the responsibility of the designer to properly detail connections on the contract drawings.



Uniformly distributed loads are
based on framing members place
on each side of the Pony Wall

LOAD
t, in-lbs
Max
1984
1984
1984
11



1984

(2) Anchors to structure

Notes:

LGPW60

- 1 Pony Wall Lite is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track.
- 2 Out-of-plane loads are transferred to the floor system through base-plate, which is welded to Pony Wall Lite member.
- 3 Pony Wall Lite may be used in place of standard framing members, or in conjunction with them to frame the wall.
- 4 Listed allowable loads are based on Allowable Stress Design (ASD).
- 5 For serviceability/deflection calculations of Pony Wall Lite, use effective moment of inertia = 0.1350 in (54mils), 0.1626in (68mils)
- 6 Above listed capacities w/anchors shall be used only when using 3/8" ♦ Hilti Kwik Bolt-3 anchors to concrete.
- 7 Other anchors may be used to achieve full Pony Wall Lite capacity, but must be designed separately.
- **8** Above listed capacities have not been increased for wind, seismic, or other factors.
- 9 Hilti is a registered trademark of Hilti Aktiengeseilschaft Corporation.
- 10 It is the designer's responsibility to check for minimum concrete edge distance and minimum concrete thickness when using anchors.
- 11 It is the responsibility of the designer to properly detail connections on the contract drawings.

Fixed Universal Slip Clip

10 and 12 gauge fixed universal slip clip.

The clips are available in standard lengths of 6" and 8" in 12 and 10 gauge. They are ideal for medium to larger standoff conditions. FUS clips install quickly and provide adjustable standoff to ensure a plumb wall plane.

- · Eliminates shims and scabs.
- Fast, one-piece universal installation.
 No left- or right-handed clips.
- Can be used in applications where significantly higher capacities are required.

PRODUCT DIMENSIONS

Lengths: 6" or 8"

MATERIAL SPECIFICATIONS

Gauge: 12 gauge (97mils)

Design Thickness: 0.1017 inches


Gauge: 10 gauge (118mils)


Design Thickness: 0.1242 inches

Coating: G90 (Z275 hot-dipped galvanized coating)

Material: Structural Grade 50 Type H (ST50H), 50ksi

ASTM: A653/A653M, ASTM A1003







Fixed Universal Slip Clip (FUS6, FUS8)

	Thi	ckness			
Product code	Mils (Gauge)	Design thickness (in)	Clip length (in)	Packaging Pcs./Box	
FUS6-97	07:1- (12)	0.1017	6	10	
FUS8-97	97mils (12ga)	0.1017	8	10	
FUS6-118	110:1- (10)	0.1242	6	10	
FUS8-118	118mils (10ga)	0.1242	8	10	

INSTALLATION

Connections to the building can be made with screws, welds powder-actuated fasteners. Mechanical fasteners shall be located on the embossed marks given on the scored line of the 2" flange. Attach building anchors to the structure according to the manufacturer's instructions. Anchors shall be installed through the embossments on the scored line of the clip as shown on the attached drawings. In no case shall anchors be installed more than 3/4" from the bend on the short leg of the clip. In cases of discrepancy between this information and the Design Engineer's details, the Design Engineer's details shall be followed.

For a Rigid Connection:

Attach the FUS clip to cold-formed steel framing members using (8) #12 self-tapping screws (not included) for the FUS6 clip and (10) #12 self-drilling screws (not included) for the FUS8 clip through the clip holes into the steel framing. For a rigid connection, screws should not be installed in any of the slotted holes.

Fixed Universal Slip Clip Design Capacities RIGID CONNECTIONS											
Product	Clin thinks	Clip	No. of #12 screws to framing	Stud thickness		Capa	cities (lbs)				
code	Clip thickness mils (gauge)	length		mils (gauge)	In-Plane	Tension	Compression	Shear			
	·····o (Banko)	(in)			F1	F2	F3	F4			
	97mils (12ga)		8	33mils (20ga)	162	1550	1258	921			
FUS6-97		6		43mils (18ga)	239	1974	1716	1555			
				54mils (16ga)	323	2439	2217	2250			
				68mils (14ga)	476	2468	2789	2402			
				97mils (12ga)	793	2529	3971	2718			
			10	33mils (20ga)	162	1550	1258	921			
		8		43mils (18ga)	250	1974	1652	1300			
FUS8-97	97mils (12ga)			54mils (16ga)	346	2439	2084	1716			
				68mils (14ga)	513	2469	2638	2088			
				97mils (12ga)	859	2531	3784	2857			
				33mils (20ga)	171	1538	1470	921			
				43mils (18ga)	229	2358	2107	1555			
FUS6-118	118mils (10ga)	6	8	54mils (16ga)	294	3255	2805	2250			
				68mils (14ga)	458	3286	3515	2402			
				97mils (12ga)	799	3351	4982	2718			
				33mils (20ga)	171	1538	1470	921			
			10	43mils (18ga)	241	2358	2216	1300			
FUS8-118	118mils (10ga)	8		54mils (16ga)	319	3255	3033	1716			
				68mils (14ga)	474	3286	3672	2088			
				97mils (12ga)	794	3351	4995	2857			






Notes:

- 1 FUS was tested in compliance with ICC-ES AC-261 (2019) listed test setups.
- 2 #12 self-tapping screws were used to attach clips to framing members.
- 3 The ultimate screw shear strength and screw tension strength for #12 screws shall be at least 2000-lbs, and 2325-lbs respectively.
- 4 The screw strength capacities are based of CFSEI Tech Note (F701-12).
- 5 Allowable loads have not been increased for seismic or wind.

Product Detail

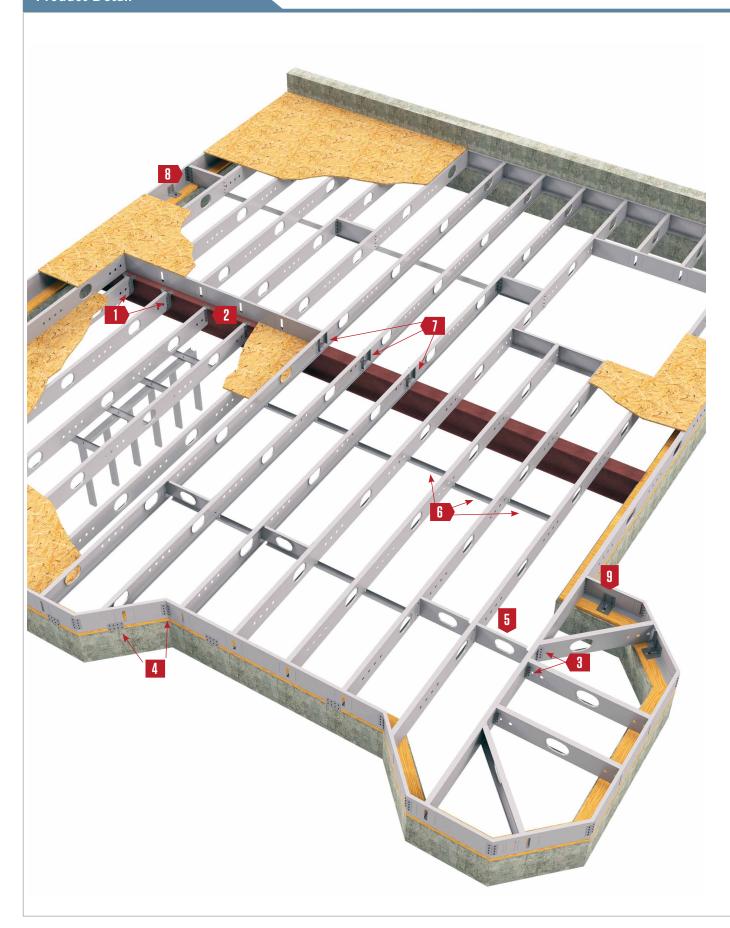

Bridle Hanger pages 122-123





TradeReady® Structural
Bridging
page 133



2 Universal Joist Hanger pages 124-126





7 EasyClip™ QuickTwist™ Web Stiffener pages 134-135





3 Skewable Angle page 128-129





B EasyClip E-Series™ Support Clip pages 136–137





TradeReady® Rim
Track Splice Plate
pages 130-131






9 Custom Fabricated Clips & Connections pages 2-3



TradeReady® Floor
Joist Blocking
page 132





Bridle Hanger

Attach floor joists to structural steel beams or wood ledgers.

Bridle hangers are commonly used to attach light-gauge C-joists to structural steel beams or wood ledgers.

Connections can be made with screws, powder-actuated fasteners, drill-in concrete anchors or welding. Single-and double-wide bridle hangers are available.

PRODUCT DIMENSIONS

Widths: 2-1/16" or 4-1/8" Heights: 6", 8", 10" or 12"

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Gauge: 12 gauge (97mils)


Design Thickness: 0.1017 inches


Coating: G90

ASTM: A653/A653M

INSTALLATION

Attach bridle hanger to the primary frame as specified. When welding the hanger to the primary frame, a minimum of 2" fillet weld on each top flange is required. Distribute the weld equally on both top flanges. Uplift loads do not apply to weld-on applications. Special considerations must be taken when welding galvanized steel. Place joist into hanger and secure with fasteners. If bridle hanger is less than beam depth, provide back blocking.







Bridle Hangers (CDBV, CDMB)

	Thic	kness			
Product code	Mils (Gauge)	Design thickness (in)	Depth (H) (in)	Width (W) (in)	Packaging Pcs./Carton
CDBV 1-5/8 x 6		0.0742	6	1-5/8	20
CDBV 1-5/8 x 8	68mils (14ga)		8		20
CDBV 1-5/8 x 10		0.0713	10	1-5/8	15
CDBV 1-5/8 x 12			12		15
CDBV 2 x 6			6		20
CDBV 2 x 8	68mils (14ga)	0.0713	8	2 1/16	20
CDBV 2 x 10			10	2-1/16	15
CDBV 2 x 12			12		15
CDBV 4 x 6		0.0713	6	4-1/8	15
CDBV 4 x 8	68mils (14ga)		8		15
CDBV 4 x 10			10		15
CDBV 4 x 12			12		15
CDMB 1-5/8 x 6		0.1017	6	1-5/8	20
CDMB 1-5/8 x 8	07: - (12)		8		20
CDMB 1-5/8 x 10	97mils (12ga)		10		15
CDMB 1-5/8 x 12			12		15
CDMB 2 x 6			6		20
CDMB 2 x 8	07 1 (12)	0.1017	8	2-1/16	20
CDMB 2 x 10	97mils (12ga)	0.1017	10	2-1/10	15
CDMB 2 x 12			12		15
CDMB 4 x 6			6		15
CDMB 4 x 8	07: - (12)	0.1017	8	4 1/0	15
CDMB 4 x 10	97mils (12ga)	0.1017	10	4-1/8	15
CDMB 4 x 12			12		15

Bridle Hangers (CDBV, CDMB)

Dilai		igers (Ci	J					
Product	Membe	r Designation (in)		onfiguration /	Hanger	ASD Loads (Ib)		
code	Width	11.1.1.	Hea	ader	Joist	11.156	_	
	Width	Height	Flange	Web	Web	Uplift	Down	
		6	(6) #10	(4) #12	(2) #12	1146	1443	
		8	(6) #10	(6) #12	(3) #12	1929	2193	
		10	(6) #10	(8) #12	(4) #12	2314	2620	
	4 44 14 6 11	12	(6) #10	(10) #12	(5) #12	2873	3319	
	1-11/16"	6			(2) #12	_	1554	
		8	(4) x 2" fillet weld [each side of top flange]		(3) #12	_	2089	
		10			(4) #12	_	2089	
		12			(5) #12	_	2089	
		6	(6) #10	(4) #12	(2) #12	1146	1443	
		8	(6) #10	(6) #12	(3) #12	1929	2193	
CDDV		10	(6) #10	(8) #12	(4) #12	2314	2620	
CDBV 68mils	2-1/16"	12	(6) #10	(10) #12	(5) #12	2873	3319	
(14ga)	2-1/10	6			(2) #12	_	1554	
(1-Ra)		8	(4) x 2" fillet weld [each side of top flange]		(3) #12	_	2089	
		10			(4) #12	_	2089	
		12			(5) #12	_	2089	
		6	(6) #10	(4) #12	(4) #12	2293	2886	
		8	(6) #10	(6) #12	(6) #12	3699	4197	
		10	(6) #10	(8) #12	(8) #12	4629	5239	
	4-1/8"	12	(6) #10	(10) #12	(10) #12	5025	6054	
	4-1/0	6			(4) #12	_	3108	
		8	(4) x 2" f	fillet weld	(6) #12	_	3771	
		10	[each side o	f top flange]	(8) #12	_	5055	
		12			(10) #12	_	5104	
		6	(6) #10	(4) #14	(2) #14	1545	2032	
		8	(6) #10	(6) #14	(3) #14	2370	2687	
		10	(6) #10	(8) #14	(4) #14	3166	3474	
	1-11/16"	12	(6) #10	(10) #14	(5) #14	3927	4950	
	1-11/10	6			(2) #14	_	2032	
		8	(4) x 2" f	fillet weld	(3) #14	_	2462	
		10	[each side o	f top flange]	(4) #14	_	2993	
		12			(5) #14	-	2993	
		6	(6) #10	(4) #14	(2) #14	1545	2032	
		8	(6) #10	(6) #14	(3) #14	2370	2687	
CDMB		10	(6) #10	(8) #14	(4) #14	3166	3474	
97mils	2-1/16"	12	(6) #10	(10) #14	(5) #14	3927	4950	
(12ga)	2 1/10	6			(2) #14	_	2032	
(60)		8		fillet weld	(3) #14	-	2462	
		10	[each side o	f top flange]	(4) #14	_	2993	
		12			(5) #14	_	2993	
		6	(6) #10	(4) #14	(4) #14	3090	4064	
		8	(6) #10	(6) #14	(6) #14	4332	5558	
		10	(6) #10	(8) #14	(8) #14	6332	6949	
	4-1/8"	12	(6) #10	(10) #14	(10) #14	7771	8948	
	1 1/0	6			(4) #14	_	4064	
		8		illet weld	(6) #14	_	4789	
		10	[each side o	f top flange]	(8) #14	_	6078	
		12			(10) #14	_	6489	





Notes:

- 1 Screws shall be installed through the pre-drilled holes in the hanger or as detailed by the designer.
- **2** CFS joist shall be laterally braced per designer specification.
- 3 An 1/8" gap shall be maintained between end of the joist and the supporting header.
- **4** CFS header must be braced to prevent web crippling/buckling per designer specification.
- **5** CFS header must have full bearing of 2-1/2" flange-depth.
- ${\bf 6}$ The ultimate screw shear strength for #12 screws shall be at least 2330 lbs.
- **7** The ultimate screw shear strength for #14 screws shall be at least 3048 lbs.
- ${\bf 8}$ The screw shear strength capacities are based on CFSEI Tech Note (F701-12).
- 9 Allowable loads have not been increased for seismic or wind.
- **10** Contact Clark Dietrich Engineering Services for technical assistance.

Universal Joist Hanger

Floor joist connection to structural steel beams or CFS headers

The Universal Joist Hangers (UJH) 68mils (14ga) are used to connect joists to CFS headers (with screws, welds or PAF fasteners) and steel I-beams (with welds or PAF fasteners). The UJH is sized to fit joist sizes from 8" to 14" deep. Also available in 97mils (12ga).

PRODUCT DIMENSIONS

Dimensions: 4" x 7-1/2" long
Packaging: (25) pieces per bucket

MATERIAL SPECIFICATIONS

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Yield Strength: Structural Grade 50

Type H (ST50H), 50ksi

Coating: G90

ASTM: A1003, ASTM A653


Gauge: 12 gauge (97mils)

Design Thickness: 0.1017 inches **Yield Strength:** Structural Grade 50

Type H (ST50H), 50ksi

Coating: G90

ASTM: A1003, ASTM A653

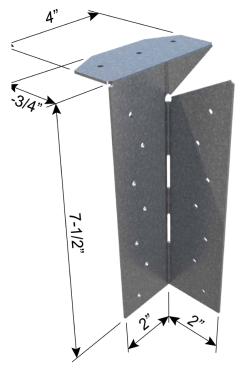

INSTALLATION

Clip to Joist Attachment:

 The joist flange must rest on top of the Universal Joist Hanger as shown in the image to the right. Attach the UJH hanger with specified number of #10 or #14 screws as listed in the table below under the Joist column.

Clip attachment to CFS Header:

• Attach the UJH hanger to the top and side (face) of the CFS Header with specified number of #10 screws as listed in the table below.

Clip attachment to Structural/Steel Beam

Welded Connection:

The minimum required weld to the top flange is 2" fillet weld to each side of top flange. Special considerations must be taken when welding galvanized steel.

PAF (Powder Actuated Fasteners):

For powder actuated fasteners attachment (PAF, 0.157"), steel beam shall have minimum 3/16" thickness and minimum yield strength of 36ksi.

Universal Joist				
Product code	Thi Mils (Gauge)	Ckness Design thickness (in)	Packaging Pcs./Bucket	
UJH-68	68mils (14ga)	0.0713"	50	
UJH-97	97mils (12ga)	0.1017"	50	





UJH-68	Mils (1	4ga)	ALI	OWABLE HANGE	R LOADS				
Product code	Joist	Header		Fasteners			Allowable ASD Loads (lbs)		
Froduct code	(Gauge)	(Gauge)	Тор	Face	Joist	Uplift	Down		
		ATTACHMENT TO CFS HEADER							
			2 - #10	2 - #10	2 - #10	430	473		
	18	18 16	3 - #10	4 - #10	4 - #10	860	946		
			3 - #10	7 - #10	7 - #10	860	1021		
			2 - #10	2 - #10	2 - #10	789	789		
	16	16 16	3 - #10	4 - #10	4 - #10	1548	1548		
UJH-68			3 - #10	7 - #10	7 - #10	1548	1705		
			2 - #10	2 - #10	2 - #10	852	935		
	14	14	3 - #10	4 - #10	4 - #10	1639	1798		
			3 - #10	7 - #10	7 - #10	2077	2115		
			2 - #10	2 - #10	2 - #10	906	1035		
	12	12	3 - #10	4 - #10	4 - #10	1710	1953		
			3 - #10	7 - #10	7 - #10	2536	3026		

	ATTACHMENT TO STEEL HEADER							
			2 - #10	132	788			
	18		4 - #10	263	975			
			7 - #10	298	975			
			2 - #10	132	997			
	16		4 - #10	263	1148			
		2" long fillet	7 - #10	334	1148			
		[Weld to each side of top flange]	2 - #10	132	997			
	14		4 - #10	263	1148			
			7 - #10	334	1148			
	12		2 - #10	132	1035			
			4 - #10	263	1285			
UJH-68			7 - #10	334	1285			
	18	2 x 0.157" PAF	2 - #10	126	784			
		3 x 0.157" PAF	4 - #10	136	869			
			7 - #10	136	869			
		2 x 0.157" PAF	2 - #10	132	965			
	16	3 x 0.157" PAF	4 - #10	171	1117			
		3 X U.137 PAF	7 - #10	171	1117			
		2 x 0.157" PAF	2 - #10	132	965			
	14	2 0 1E7" DA E	4 - #10	171	1117			
		3 x 0.157" PAF	7 - #10	171	1117			
		2 x 0.157" PAF	2 - #10	132	1035			
	12	2 0 1E7" DA E	4 - #10	241	1279			
		3 x 0.157" PAF	7 - #10	241	1304			

- 1 Screws shall be installed through the pre-drilled holes in the hanger or as detailed by the designer.
- **2** CFS joist shall be laterally braced per designer specification.
- 3 For a gap between the end of the joist and the face of the hanger ranging between 0" 1/2", no adjustment factor is required. When the gap is between 1/2" and 7/8", an adjustment factor of 0.95 shall be used to the load capacities listed.
- 4 For skew condition up to 45°, an adjustment factor of 0.95 for 7-screw condition and 0.80 for 4-screw condition shall be used. No skew is allowed for 2-screw connection.
- 5 If the clip is installed hard side (exterior web) of CFS joist, an adjustment factor of 0.95 shall be used to the load capacities listed. In addition, if the clip has to be skewed up to 45°, an additional adjustment factor of 0.95 for 7-screw condition and 0.80 for 4-screw condition shall be used to the load capacities listed.
- 6 CFS header must be braced to prevent web crippling/buckling per designer specification.
 7 CFS header must provide full bearing of 1-5/8" flange-depth.
- 8 Backing of the steel beam cavity is not required behind the hanger for the load listed.
- 9 The ultimate screw shear strength for #10 screws shall be at least 1644 lbs.
- 10 The screw shear strength capacities are based on CFSEI Tech Note (F701-12).
- 11 Allowable loads have not been increased for seismic or wind.
- 12 Contact Clark Dietrich Engineering Services for technical assistance.

Universal Joist Hanger

UJH-97 Mils (12ga) ALLOWABLE HANGER LOADS Allowable ASD Loads (lbs) **Fasteners** Joist (Ga) Header (Ga) Product code Тор Joist Uplift ATTACHMENT TO CFS HEADER 2 - #10 2 - #10 2 - #14 439 489 18 16 3 - #10 4 - #10 4 - #14 959 860 3 - #10 7 - #14 7 - #14 958 1021 2 - #10 2 - #10 2 - #14 940 940 3 - #10 1773 1773 16 16 4 - #10 4 - #14 UJH-97 3 - #10 7 - #14 7 - #14 1931 1773 2 - #14 2 - #10 2 - #10 1123 1327 3 - #10 4 - #10 4 - #14 14 14 2041 2413 3 - #10 7 - #14 7 - #14 2388 2445 2 - #10 2 - #10 2 - #14 1238 1898 12 3 - #10 4 - #10 4 - #14 2135 3273 3 - #10 7 - #14 7 - #14 4092 4350

		ATTACHMENT TO STEEL H	IEADER		
			2 - #14	201	837
	18		4 - #14	401	975
			7 - #14	431	975
			2 - #14	201	1472
	16		4 - #14	401	1570
		2" long fillet	7 - #14	577	1696
		[Weld to each side of top flange]	2 - #14	201	1472
	14		4 - #14	401	1570
			7 - #14	577	1696
			2 - #14	201	1651
	12		4 - #14	401	1738
UJH-97			7 - #14	598	1761
	18	2 x 0.157" PAF	2 - #14	201	890
		3 x 0.157" PAF	4 - #14	252	890
			7 - #14	252	890
		2 x 0.157" PAF	2 - #14	201	1380
	16	3 x 0.157" PAF	4 - #14	332	1626
		3 x 0.137 FAI	7 - #14	332	1626
		2 x 0.157" PAF	2 - #14	201	1380
	14	3 x 0.157" PAF	4 - #14	332	1626
		3 x 0.137 FAF	7 - #14	332	1626
		2 x 0.157" PAF	2 - #14	201	1644
	12	3 x 0.157" PAF	4 - #14	367	1730
		3 x 0.137 PAF	7 - #14	367	1812

Notes

- 1 Screws shall be installed through the pre-drilled holes in the hanger or as detailed by the designer.
- ${\bf 2}$ CFS joist shall be laterally braced per designer specification.
- 3 For a gap between the end of the joist and the face of the hanger ranging between 0" 7/8", no adjustment factor is required.
- 4 For skew condition up to 45°, an adjustment factor of 0.85 for 7-screw condition and 0.90 for 4-screw condition shall be used. No skew is allowed for 2-screw connection.
- 5 If the clip is installed hard side (exterior web) of CFS joist, no adjustment factor is required.
- 6 CFS header must be braced to prevent web crippling/buckling per designer specification.
- 7 CFS header must provide full bearing of 1-5/8" flange-depth.
- 8 Backing of the steel beam cavity is not required behind the hanger for the load listed.
- 9 The ultimate screw shear strength for #14 screws shall be at least 3048 lbs.
- 10 The screw shear strength capacities are based on CFSEI Tech Note (F701-12).
- 11 Allowable loads have not been increased for seismic or wind.
- 12 Contact ClarkDietrich Engineering Services for technical assistance.

Skewable Angle

For rigid and off-angle attachments of joist-to-joist, joist-to-hip beam, or to other structural steel members.

Clark Dietrich skewable angles are used to make rigid attachments of joist-to-joist or joist-to-other miscellaneous framing. This clip is ideal for making off-angle attachments. It is easily field bent from 0° to 90°.

CAUTION: This clip can only be bent one time.

PRODUCT DIMENSIONS

Legs: 2" x 2"

Clip Lengths: 3", 4-3/8", 5", 6-3/8", 7", 9"

MATERIAL SPECIFICATIONS

Gauge: 18 gauge (43mils)

Design Thickness: 0.0451 inches

Coating: G90


ASTM: A653/A1003

INSTALLATION

Use specified fasteners. For off-angle connections, field bend (ONE TIME ONLY) to the required degree so the Skewable Angle fits securely over the two adjoining members. Secure the Skewable Angle by filling all prepunched screw holes with #10 screws or as required by design. Joist must be constrained against rotation when using a single Skewable Angle per connection.


Skewable A	Angles	(SA)
		Product T

	Product T	Thickness		5.1.1	
Product code	Mils (Gauge)	Design thickness (in)	Height (in)	Packaging Pcs./Carton	
SA3	43mils (18ga)	0.0451	3	100	
SA4	43mils (18ga)	0.0451	4-3/8	100	
SA5	43mils (18ga)	0.0451	5	100	
SA6	43mils (18ga)	0.0451	6-3/8	100	
SA7	43mils (18ga)	0.0451	7	100	
SA9	43mils (18ga)	0.0451	9	100	



Skewable Angle Allowable Loads

	Angle Allowa			Allowable	Loads (lbs)
Product code	Stud thickness Mils (Gauge)	Length (in)	Fasteners	Shear (F1)	Tension (F2)
	33mils (20ga)			339	251
	43mils (18ga)			372	328
SA3	54mils (16ga)	3.000	6 - #10	372	594
	68mils (14ga)			372	677
	97mils (12ga)			372	677
	33mils (20ga)			339	251
	43mils (18ga)			505	328
SA4	54mils (16ga)	4.375	6 - #10	512	594
	68mils (14ga)			512	748
	97mils (12ga)			512	930
	33mils (20ga)		8 - #10	510	335
	43mils (18ga)	5.000		744	437
SA5	54mils (16ga)			744	792
	68mils (14ga)			744	998
	97mils (12ga)			744	1353
	33mils (20ga)			690	419
	43mils (18ga)	6.375	10 - #10	884	546
SA6	54mils (16ga)			884	990
	68mils (14ga)			884	1247
	97mils (12ga)			884	1607
	33mils (20ga)			690	419
	43mils (18ga)			1027	546
SA7	54mils (16ga)	7.000	10 - #10	1116	990
	68mils (14ga)			1116	1247
	97mils (12ga)			1116	1779
	33mils (20ga)			1061	587
	43mils (18ga)			1116	765
SA9	54mils (16ga)	9.000	14 - #10	1116	1386
	68mils (14ga)			1116	1746
	97mils (12ga)			1116	2030




Notes:

- 1 Screws shall be attached through the pre-drilled holes provided.
- 2 The allowable values for F1 and F2 are to be used only when the clip leg is attached to cold-formed steel framing. The capacity of the attachment to other materials and structures must be checked separately.
- 3 This table is intended for use by a qualified design professional. It is the responsibility of the engineer to verify that the tabulated values apply to a specific connection application. The 1/8-in deflection service load limit is not included in the listed tension (F2) capacities.
- 4 Values for 18ga (43 mils) skewable angles were based on using 33 ksi calculations for worst case. These angles are manufactured using 50 ksi.
- 5 The ultimate screw shear strength and tensile strength for #10 screws should be at least 1644 lbs and 1158 lbs respectively. These shear and tensile capacities of #10 screws are based on CFSEI Tech Note (F701-12).
- 6 Allowable loads have not been increased for seismic or wind.
- **7** Contact Clark Dietrich Engineering Services for technical assistance.

Typical Construction Details

Visit our CAD Library at itools.clarkdietrich.com to view or download construction details in .dwg, .dxf, and .pdf formats.



Field Skewable TradeReady® Rim Track Splice Plate

Ideal for splicing rim joist and is easily field skewable for off-angle rim joist connections.

The ClarkDietrich field skewable TradeReady® rim track splice plate provides an easy and efficient method for splicing TradeReady rim. This prepunched plate is also ideal for connecting and reinforcing the rim at bay or bow window details. The center of the plate allows for easy one-time field bending from 0° to 135°.

CAUTION: This plate can only be bent one time.

MATERIAL SPECIFICATIONS

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Yield Strength: 50ksi

Coating: G90


ASTM: A653/A653M

INSTALLATION

For splicing connections, align center slots in splice plate over the joint of the rim joists. Secure splice plate by filling all prepunched screw holes with #10 screws.


For off-angle connections, field bend (ONE TIME ONLY) to the required degree so the plate fits securely over the two adjoining members. Secure field skewable plate by filling all prepunched screw holes with #10 screws.





Field Skewable TradeReady Rim Track Splice Plate

Field Skewable TradeReady® Rim Track Splice Plates (TDSP)						
Product code	Mils (Gauge)	Design thickness (in)	Size (in)	Packaging Pcs./Bucket		
TDSP	54mils (16ga)	0.0566	4 x 6	100		

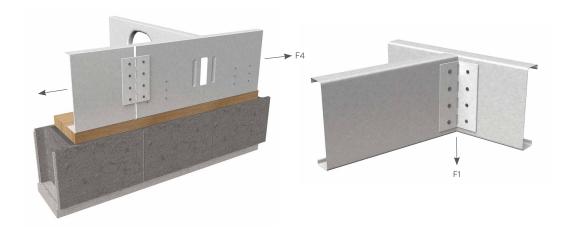



Field Skewable TradeReady® Rim Track Splice Plates (TDSP) ALLOWABLE LOADS						
Product code	TDSP gauge	Framing material gauge	Framing material yield (ksi)	Tension F4 (lbs)	Shear F1 (lbs)	
TDSP 18	10	20	33	560	437	
	18	18 or thicker	33	832	650	
	16	20	33	560	437	
TDSP		18	33	832	650	
	10	16 or thicker	33	1172	915	
		16 or thicker		1680	1312	

Notes:

- 1 Screws shall be attached in the pre-drilled holes provided.
- 2 The allowable values for F1 and F4 are to be used only when the clip leg is attached to the CFS framing. The screw pattern must be as shown above. The capacity of the attachment to other materials and structures must be checked separately.
- 3 This table is intended for use by qualified engineers only. It is the responsibility of the engineer to verify that the tabulated values apply to a specific connection application.
- ${\bf 4}\,$ The screw diameter must be 0.19" (min.) for #10 screws.
- ${f 5}$ The ultimate screw shear strength must be a minimum of 1400 lbs for #10 screws.
- **6** Screws must be long enough so that at least three exposed threads are visible after installation.
- **7** Allowable loads have not been increased 33% for wind or seismic.
- **8** For connections made to 14 gauge (68mils), and 12 gauge (97mils), use the tabulated values for 16 gauge (54mils), 50ksi, when using TDSP (16 gauge). Similsarly when TDSP (18 gauge) is used with thicker base materials, the values for 18 gauge x 33ksi are to be used.
- 9 It is the responsibility of the design professional to detail the drawings for proper clip attachment.
- 10 Contact ClarkDietrich at 888-437-3244 for technical assistance.

TYPICAL CONSTRUCTION DETAILS





Visit our CAD Library at clarkdietrich.com to view or download construction details in .dwg, .dxf, and .pdf formats.

TradeReady® Floor Joist Blocking

Quick and efficient system that prevents joist rotation and accommodates mechanical passing

TradeReady Floor Joist Blocking is one of the primary components that make up the TradeReady floor bracing system. TradeReady Blocking features a large extruded hole to accommodate HVAC, mechanical, plumbing and sprinkler runs.

TradeReady Blocking is pre-cut and formed to fit securely between the floor joists to prevent joist rotation.

Designed to be used with joist up to 3" legs.

Pre-punched holes in the connection legs are added for quick attachment to each floor joist. Structural blocking is an economical alternative to Tension Bracing (CDTB) or Diagonal Tension Strapping.

Floor Joist Blocking is typically used in conjunction with a continuous row of TradeReady Structural Bridging (TDSB) that ties the floor system to the structure allowing bracing against lateral movement.

ALTERNATIVE PRODUCTS

Tension Bracing
Diagonal Tension Strapping

MATERIAL SPECIFICATIONS

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Coating: G90 ASTM: A1003

INSTALLATION

Place the notched end of the TradeReady Blocking inside the open side of one floor joist. Attached each end of the TradeReady Blocking to each floor joist with (2) #10-16 screws in pre-punched holes.



	Thi	ckness	Joist Size	Hole Size	Dealeasins
Product code	Mils (Gauge)	Design thickness (in)	Joist Size (in)	(in)	Packaging Pcs./Ctn
725JB12			7-1/4	4-1/2" x 7"	
800JB12			8	4-1/2" x 7"	
925JB12			9-1/4	6-1/2" x 9"	
1000JB12			10	6-1/2" x 9"	
1125JB12			11-1/4	6-1/2" x 9"	
1200JB12			12	6-1/2" x 9"	
1400JB12			14	6-1/2" x 9"	
725JB16			7-1/4	4-1/2" x 7"	
800JB16			8	4-1/2" x 7"	
925JB16			9-1/4	6-1/2" x 9"	
1000JB16	54mils (16ga)	0.0566	10	6-1/2" x 9"	10
1125JB16			11-1/4	6-1/2" x 9"	
1200JB16			12	6-1/2" x 9"	
1400JB16			14	6-1/2" x 9"	
725JB24			7-1/4	4-1/2" x 7"	
800JB24			8	4-1/2" x 7"	
925JB24			9-1/4	6-1/2" x 9"	
1000JB24			10	6-1/2" x 9"	
1125JB24			11-1/4	6-1/2" x 9"	
1200JB24			12	6-1/2" x 9"	
1400JB24			14	6-1/2" x 9"	



TradeReady® Structural Bridging

Pre-cut structural blocking that installs easily to the underside of the joists to prevent joist rotation.

TradeReady® structural bridging is the third component of the TradeReady steel floor system. Prepunched for quick attachment, structural blocking is pre-cut to fit securely between the underside of the floor joists to prevent joist rotation. Structural blocking is an economical alternative to cross bracing, X-bracing or strapping.

CAUTION: In order to prevent joist rolling, the TDSB blocking must be tied into the structure or otherwise braced against lateral movement.

NOTE: TDSB blocking is not required if sheathing is applied to the joists top and bottom.

PRODUCT DIMENSIONS

2-1/2" x 12"

2-1/2" x 16"

2-1/2" x 19.2"

2-1/2" x 24"

MATERIAL SPECIFICATIONS

Gauge: 18 gauge (43mils)


Design Thickness: 0.0451 inches

Coating: CP60

ASTM: A653/A653M, C955

INSTALLATION

A continuous row of TradeReady structural blocking should be installed every 8' o.c. maximum and staggered for easy attachment. Blocking is secured to each joist flange using two #10 screws at each end.





TradeReady® Structural Bridging (TDSB)

	Thic	kness			
Product code	Mils (Gauge)	Design thickness (in)	Size (in)	Packaging Pcs./Bundle	
TDSB12	43mils (18ga)	0.0451	2-1/2 x 12	10	
TDSB16	43mils (18ga)	0.0451	2-1/2 x 16	10	
TDSB19	43mils (18ga)	0.0451	2-1/2 x 19.2	10	
TDSB24	43mils (18ga)	0.0451	2-1/2 x 24	10	

EasyClip™ QuickTwist™ Web Stiffener

Excellent reinforcement at critical load points to prevent web crippling.

ClarkDietrich EasyClip™ QuickTwist™ web stiffeners are used to provide reinforcement of joist webs to prevent crippling. Web reinforcement is often required by design to enhance the load capacity of joists. The unique design of QTWS allows the installer to easily insert the stiffener on the inside of the joist after the joist is installed. This stiffener eliminates the need to pre-insert traditional web stiffeners prior to joist installation. The one-piece assembly is easily rotated in-place for a tight fit.

PRODUCT DIMENSIONS

3-1/2" x 6"-14" x 1-1/4" 6" x 6"-14" x 1-1/4"

MATERIAL SPECIFICATIONS

Gauge: 12 gauge (97mils)


Design Thickness: 0.1017 inches

Coating: G90

Yield Strength: 50ksi ASTM: A653/A653M

INSTALLATION

The unique design of the EasyClip QuickTwist web stiffener allows it to be easily rotated in-place for a tight fit between flanges. The web stiffener shall be secured to the web of the joist with (3) #10-16 screws. Screws shall be driven through the top, bottom and middle prepunched holes as shown in the illustrations.

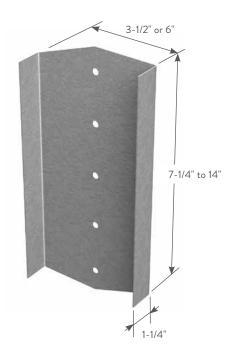

FasyClin ^{TA}	OuickTwist*	Web Stiffeners	(OTWS)
EasyClip	Quickiwist	web Stiffeners	(QIMS)


		Thickness				
Product code	Size (in) width	Mils (Gauge)	Design thickness (in)	Size* (in) length	Packaging	
				6		
				7-1/4		
				8		
QTWS	3-1/2	97mils (12ga)	0.1017	9-1/4	Dependent on	
Q1W3	3-1/2			10	order quantity	
				11-1/4		
				12		
				14		
				6		
				7-1/4		
				8		
QTWS	6	97mils (12ga)	0.1017	9-1/4	Dependent on	
QIWS	O	9711111S (12ga)	0.1017	10	order quantity	
				11-1/4		
				12		
				14		

^{*}Dimension is nominal size. Actual product is shorter to fit inside joist.

Note: The QTWS is designed to work with all floor joist flanges but the length of the QTWS clip shall match the depth of the supporting floor joist.



QTWS Allowable Web Crippling Loads (Ibs) 3-1/2" Web Stiffener 6" Web Stiffener Joist Joist Fy (ksi) Cond. 1 Cond. 2 Cond. 3 Cond. 1 Cond. 2 Cond. 3 (in) (gauge) 5,781 5 659 6.403 43 (18) 33 5 360 5 932 6 265 5,457 6,155 5,924 6,042 6,817 6,558 33 54 (16) 50 5,574 6,632 6,282 6,177 7,351 6,959 7.25 5,615 7,482 7,021 33 6,761 6,346 6,220 68 (14) 50 5.813 7,550 6,921 6,447 8,359 7,660 33 6,074 8,524 7,559 6,733 9,401 8,340 97 (12) 50 6,509 10,222 8,759 7,224 11,267 9,659 43 (18) 5,920 6,249 6,370 33 5,350 5,752 5,645 6,537 33 5.443 6.116 5.905 6,027 6.773 54 (16) 50 5,553 6,573 6,253 6,153 7,285 6,926 8 5.596 6.708 6.200 7.424 6.992 33 6.320 68 (14) 50 5,786 7,470 8,270 7,617 6,882 6,416 33 6,045 8,438 7,516 6,700 9,307 8,293 97 (12) 50 6,465 10,092 8,694 7,174 11,124 9,588 43 (18) 5.334 6.224 33 5.707 5.623 5.902 6.320 33 5,422 6,056 5,875 6,002 6,706 6,503 54 (16) 50 5,521 6,481 6,208 6,116 7,182 6,876 9.25 33 5,568 6,626 6,279 6,167 7,332 6,947 68 (14) 8.132 7 548 50 5 742 7.345 6.820 6 3 6 6 33 5.999 8,304 7,450 6,649 9,159 8,220 97 (12) 6,396 50 9,888 8,594 7,096 10,900 9,477 33 5,410 6,021 5,858 5,988 6,484 6.667 54 (16) 50 5,503 6,429 6,182 6,095 7,124 6,847 33 5,552 6,579 6,256 6,148 7,280 6,922 68 (14) 10 6,785 50 5,718 6,338 8,053 7,510 7,275 7,412 33 5 973 8 228 6 619 9 076 8,179 97 (12) 50 6,356 9,773 8,537 7,052 10,773 9,415 33 5,391 5,967 5,831 5,966 6,606 6,454 54 (16) 50 5,474 6,347 6,141 6,062 7,032 6,802 5.526 6,505 6,220 7,198 6.881 33 6,119 68 (14) 11.25 50 5,679 7.163 6,730 6,294 7 929 7.448 8,943 8,114 33 5,932 8,108 7,353 6,573 97 (12) 50 6.294 9.590 8.447 6.981 10,573 9.316 5,936 5,954 5,380 5.816 33 6,571 6.437 54 (16) 50 5,457 6,300 6,118 6,043 6,979 6,775 33 5,511 6,463 6,199 6,102 7,151 6,858 12 68 (14) 50 7,858 5.657 7.099 6.699 6.268 7.413 33 5,908 8,039 7,319 6,547 8,867 8,076 97 (12)

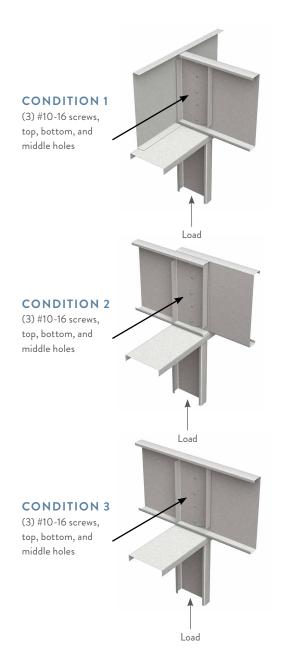

Notes:

14

1 The tabulated values indicate the total allowable web crippling capacities of a ClarkDietrich joist of the listed size, stiffened with the QuickTwist web stiffener.

9,486

6,356

6,937

7,865

9,223

8,395

6,146

6,619

7,233

8,265

6,941

6,060

6,204

6,480

6,840

10,458

7,033

7,678

8,677

10,169

9,259

6,800

7,325

7,982

9,116

2 The joist flanges must be fastened to the support at the bearing location.

6,258

5,474

5,601

5.849

6,169

50

33

50

33

68 (14)

97 (12)

- 3 The 3-1/2" web stiffeners are to be used with bearing widths of 3-1/2" to 5-1/2" in the direction of the joist. The 6" web stiffeners are to be used with bearing widths 6" and greater, in the direction of the joist. A minimum-bearing dimension of 3" in the direction perpendicular to the joist is assumed.
- 4 Use (3) #10 screws to attach the QuickTwist web stiffener to the joist. Drive screws through the top, bottom, and middle prepunched holes.
- 5 This table is intended for use by qualified engineers only. It is the responsibility of the engineer to verify that the QuickTwist web stiffener configuration and tabulated values apply to a specific web crippling application.
- 6 Contact ClarkDietrich at 888-437-3244 for technical assistance.

EasyClip™ E-Series™ Support Clip

Long leg accommodates greater standoff for rigid connections.

ClarkDietrich EasyClip™ E-Series™ support clips are primarily used for rigid standoff connections. The 4" wide leg provides extra length to achieve standoff connections up to 3." The EasyClip E-Series support clips are also commonly used in bypass wall conditions, a variety of floor framing applications including solid and ladder blocking attachments and joist-to-joist connections, and to secure rafter framing to the primary structure. Available in a variety of lengths and gauges, these clips are prepunched for faster and more accurate fastener placement.

ALTERNATIVE PRODUCTS

Uni-Clip™

EasyClipTM D-SeriesTM Anchor Clip EasyClip T-SeriesTM Tall Anchor Clip SwiftClipTM LE-SeriesTM Support Clip

PRODUCT DIMENSIONS

1-1/2" x 4" x 3"

1-1/2" x 4" x 5"

1-1/2" x 4" x 7"

1-1/2" x 4" x 9"

1-1/2" x 4" x 11"

MATERIAL SPECIFICATIONS

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Gauge: 12 gauge (97mils)


Design Thickness: 0.1017 inches

Coating: G90

Yield Strength: 50ksi ASTM: A653/A653M


INSTALLATION

EasyClip E-Series support clips are attached to the cold-formed steel (CFS) framing members using #10 minimum self-drilling screws driven through the clip holes into the steel framing. When not filling all holes, install fasteners symmetrically starting at the top and bottom edges and move toward the center of the clip. Clip can also be welded to the CFS framing. Connections to the building frame can be made with powder-actuated fasteners, drill-in concrete anchors or welding. When using the tabular values for a welded clip, provide a full weld to the structure, top to bottom, along the outside of the clip. A 3/4" minimum weld on the outside edge of the 1-1/2" leg is also required to control warping or to hold the clip in place before final welding.



EasyClip E-Series Support Clip

EasyClip™ E-Series™ Support Clips							
	Thic	kness					
Product code	Mils (Gauge)	Design thickness (in)	Size (in)	Packaging Pcs./Bucket			
E543	54mils (16ga)	0.0566	4 x 1-1/2 x 3	100			
E545	54mils (16ga)	0.0566	4 x 1-1/2 x 5	100			
E547	54mils (16ga)	0.0566	4 x 1-1/2 x 7	100			
E549	54mils (16ga)	0.0566	4 x 1-1/2 x 9	50			
E541	54mils (16ga)	0.0566	4 x 1-1/2 x 11	50			
E683	68mils (14ga)	0.0713	4 x 1-1/2 x 3	100			
E685	68mils (14ga)	0.0713	4 x 1-1/2 x 5	100			
E687	68mils (14ga)	0.0713	4 x 1-1/2 x 7	80			
E689	68mils (14ga)	0.0713	4 x 1-1/2 x 9	50			
E681	68mils (14ga)	0.0713	4 x 1-1/2 x 11	50			
E973	97mils (12ga)	0.1017	4 x 1-1/2 x 3	50			
E975	97mils (12ga)	0.1017	4 x 1-1/2 x 5	50			
E977	97mils (12ga)	0.1017	4 x 1-1/2 x 7	50			
E979	97mils (12ga)	0.1017	4 x 1-1/2 x 9	50			
E971	97mils (12ga)	0.1017	4 x 1-1/2 x 11	40			

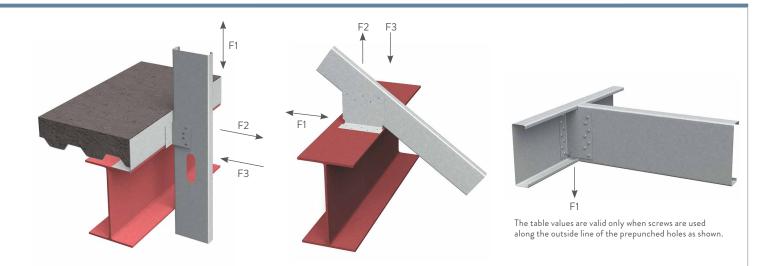

E-Series™ Support Clips Allowable Clip Capacities (lbs)

USING #10-16 SELF-DRILLING SCREWS

	No. of screws to steel framing	Stud Thickness and Yield Strength								
Product code		20ga (33mils) 33ksi			18ga (43mils) 33ksi			16ga (54mils) 50ksi		
		F1	F2	F3	F1	F2	F3	F1	F2	F3
E543	3	101 (101)	210 (531)	507	150 (150)	210 (788)	507	266 (155)	210 (1195)	507
E545	2	176 (176)	354 (354)	354	261 (261)	371 (525)	525	463 (453)	371 (933)	811
	5	251 (251)	371 (885)	885	372 (372)	371 (1313)	912	625 (479)	371 (2105)	912
E547	4	380 (380)	531 (708)	708	564 (564)	531 (1050)	1050	1002 (970)	531 (1867)	1347
	7	455 (455)	531 (1239)	1239	675 (675)	531 (1838)	1318	1169 (960)	531 (3015)	1318
E549	4	477 (477)	692 (708)	708	707 (707)	692 (1050)	1050	1257 (1257)	692 (1867)	1753
	9	706 (706)	692 (1593)	1593	1048 (1048)	692 (2363)	1724	1862 (1576)	692 (3925)	1724
E541	6	727 (727)	852 (1062)	1062	1079 (1079)	852 (1576)	1576	1918 (1918)	852 (2800)	2053
	11	995 (995)	852 (1947)	1947	1476 (1476)	852 (2889)	2130	2623 (2301)	852 (4835)	2130
E683	3	101 (101)	333 (531)	531	150 (150)	333 (788)	788	266 (196)	333 (1400)	1011
E685	2	176 (176)	354 (354)	354	261 (261)	525 (525)	525	463 (463)	587 (933)	933
	5	251 (251)	587 (885)	885	372 (372)	587 (1313)	1313	661 (602)	587 (2333)	1817
E687	4	380 (380)	708 (708)	708	564 (564)	841 (1050)	1050	1002 (1002)	841 (1867)	1867
	7	455 (455)	841 (1239)	1239	675 (675)	841 (1838)	1838	1200 (1200)	841 (3267)	2625
E689	4	477 (477)	708 (708)	708	707 (707)	1050 (1050)	1050	1257 (1257)	1095 (1867)	1867
	9	706 (706)	1095 (1593)	1593	1048 (1048)	1095 (2363)	2363	1862 (1862)	1095 (4200)	3434
E681	6	727 (727)	1062 (1062)	1062	1079 (1079)	1349 (1576)	1576	1918 (1918)	1349 (2800)	2800
	11	995 (995)	1349 (1947)	1947	1476 (1476)	1349 (2889)	2889	2623 (2623)	1349 (5133)	4244
E973	3	101 (101)	531 (531)	531	150 (150)	679 (788)	788	266 (266)	679 (1400)	1400
E975	2	176 (176)	354 (354)	354	261 (261)	525 (525)	525	463 (463)	933 (933)	933
	5	251 (251)	885 (885)	885	372 (372)	1196 (1313)	1313	661 (661)	1196 (2333)	2333
E977	4	380 (380)	708 (708)	708	564 (564)	1050 (1050)	1050	1002 (1002)	1713 (1867)	1867
	7	455 (455)	1239 (1239)	1239	675 (675)	1713 (1838)	1838	1200 (1200)	1713 (3267)	3267
E979	4	477 (477)	708 (708)	708	707 (707)	1050 (1050)	1050	1257 (1257)	1867 (1867)	1867
	9	706 (706)	1593 (1593)	1593	1048 (1048)	2229 (2363)	2363	1862 (1862)	2229 (4200)	4200
F074	6	727 (727)	1062 (1062)	1062	1079 (1079)	1576 (1576)	1576	1918 (1918)	2746 (2800)	2800
E971	11	995 (995)	1947 (1947)	1947	1476 (1476)	2746 (2889)	2889	2623 (2623)	2746 (5133)	5133

Notes:

Screw Capacity Notes:


- 1 The tabulated value indicates the number of screws in a single clip leg attached to the cold-formed steel (CFS) framing.
- 2 Screws shall be attached in a symmetric manner, starting at the outside holes. See screw options on opposite page and above for examples.
- 3 The allowable values for F1 are based only on the shear capacity of the 4" clip leg attached to the CFS framing. The capacity of the attachment to other materials and structures must be checked separately.
- 4 The allowable values for F2 assume mechanical fasteners are attached to the structure using the 1-1/2" leg, and are along the vertical centerline of the clip leg. Mechanical fasteners to other materials and structures must be checked separately.
- 5 This table is intended for use by qualified engineers only. It is the responsibility of the engineer to verify that the tabulated values apply to a specific connection application.
- **6** When clips have combinations of F1, F2, and F3, use a linear interaction for combinations of F1 and F3, and a squared interaction for combinations of F1 and F2.
- 7 The screw diameter must be 0.19" (min) for #10 screws.
- 8 The ultimate screw shear strength must be a minimum of 1400 lbs for #10 screws.

- 9 Screws must be long enough so at least three exposed threads are visible after installation.
- 10 Allowable loads have not been increased 33% for wind or seismic.
- 11 For connections made to 14ga (68mils) and 12ga (97mils), use the tabulated values for 16ga (54mils), 50ksi.
- 12 Contact Clark Dietrich Technical Services at 888-437-3244 for assistance.

Weld Capacity Notes:

- 1 F1 and F2 values in parentheses are maximum shear and tension capacities when the clips are welded to the base structure (min $3/16"-36 {\rm ksi}$).
- ${\bf 2}\,$ Listed weld capacities are computed assuming an E70XX welding rod or wire.
- 3 The clips are to be welded to the structure along the back corner along the complete length of the clip. When secondary welds are used to hold the clip in place, they are not used in capacity calculations.

Product Detail

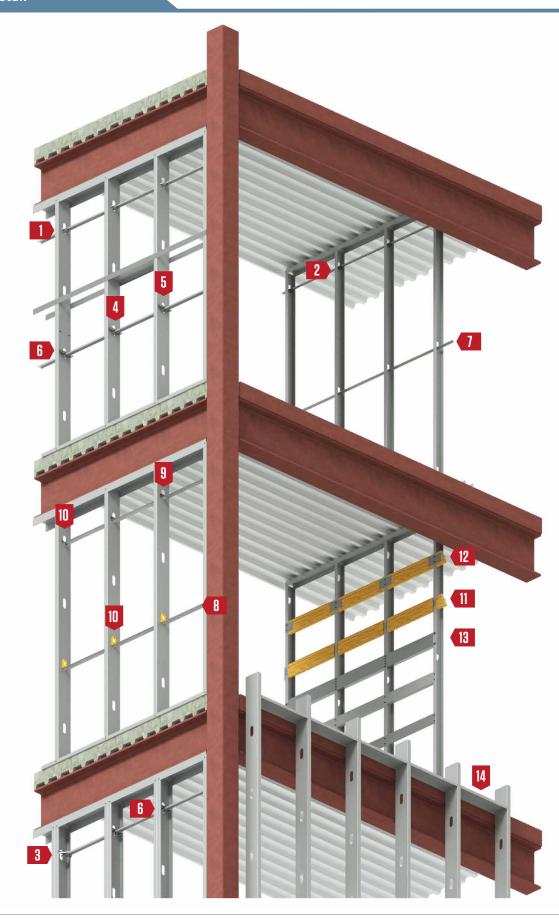

1 FastBridge™ Clip pages 140-141









Bridging Termination Clip page 144-145











EasyClip™ U-Series™ Clip Angle page 89





SwiftClip™ L-Series™ Support Clip pages 86-87



Spazzer® 9200 Spacer Bar page 148





8 Spazzer® 5400 Spacer Bar page 149-153





9 Spazzer® Bar Fly Clip page 154





10 Spazzer® Bar Guard and Snap-in Grommet page 149



11 FastBack™ **Backing System** page 155





Danback® Flexible Wood **Backing Plate** pages 156-157





Backer Bar page 158





BlazeFrame® Shield page 159





FastBridge™ Clip

Secures U-channel (cold-rolled channel) framing members for load-bearing or curtain wall applications.

The Clark Dietrich Fast Bridge clip is used to secure U-Channel or Cold-Rolled Channel (CRC) to structural or non-structural wall studs when used in load-bearing, curtain wall or drywall framing applications. The wall stud friction fit design allows for as little as one screw for the connection to the U-channel.

The FastBridge clip is a stiffened, G90 galvanized steel clip that's tested and designed to facilitate the rapid, efficient installation of 1-1/2" U-channel lateral bracing for exterior curtain wall framing, load-bearing walls or interior partitions constructed of structural or non-structural studs.

- FB33 for use with 20ga-16ga structural studs or ProSTUD® Drywall Studs
- FB43 for use with 20ga-16ga structural studs
- FB68 for use with 16ga-12ga structural studs

MATERIAL SPECIFICATIONS

Gauge: 20 gauge STR (33mils)
Design Thickness: 0.0346 inches

Gauge: 18 gauge (43mils)

Design Thickness: 0.0451 inches

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Coating: G90 ASTM: A653

ALTERNATIVE PRODUCTS

- Spazzer® 5400 and 9200 Bridging Bar
- U-Channel with SwiftClip™ LS-Series™ Support Clip
- EasyClipTM U-SeriesTM Clips

INSTALLATION


U-Channel is inserted into the stud punchout (spacing as specified by design) and rotated into place (leg down). Place the FastBridge Clip inside the punchout (stiffened wings down) and twist allowing the friction fit design to hold the clip into place. The clip must be firmly seated over the top web of the U-channel. FastBridge clips are fastened using #10 self-drilling screws driven through the clip hole into the U-channel. More than one screw may be need depending on design. The FastBridge clip should not be used in studs over 8" wide.





Product code	Mils (Gauge)	Yield strength	Design thickness (in)	Min. thickness (in)	Knockout size	Packaging pcs./bucket	
FB33	33mils (20ga STR)	33ksi	0.0346	0.0329	1-1/2"	200	
FB43	43mils (18ga)	50ksi	0.0451	0.0428	1-1/2"	200	
FB68	68mils (14ga)	50ksi	0.0713	0.0677	1-1/2"	200	

U.S. Patent No. D692,746 and Canadian Patent No. 152,547



FastBridge™ Cli	p Angles (FB43)) Allowable Clip	Capacities (lbs)

	No. of screws to			Stud Thickness and Yield Strength			
Product code steel framing St	Stud depth (in)	Allowable connector capacity	33mils (20ga)	43mils (18ga)	54mils (16ga)		
	1		A : 1 D	1140	1330	2270	
	2		Axial Brace Stiffness (lbs/in)	1220	1480	2270	
ED 42	1	2.425	A : LD	178	210	273	
FB43	2	3.625	Axial Brace Strength (lbs)	275	318	424	
	1		T : IAA . (; II.)	148	182	208	
	2		Torsional Moment (in-lbs)	331	430	556	
	1		Axial Brace Stiffness (lbs/in)	1030	1460	2170	
	2		Axiai Drace Stiffness (IDs/in)	1190	1520	3030	
FB43	1	4.00	4.00	A : LD	191	213	263
FD43	2	4.00	Axial Brace Strength (lbs)	283	321	426	
	1		Torsional Moment (in-lbs)	137	182	234	
	2		Torsional Moment (In-Ibs)	403	403	498	
	1		A : LD	790	990	1730	
	2		Axial Brace Stiffness (lbs/in)	990	1160	1930	
ED 42	1	(00	A : LD	107	214	290	
FB43	2	6.00	Axial Brace Strength (lbs)	263	324	450	
	1		T : IAA . (; II)	166	170	172	
	2		Torsional Moment (in-lbs)	296	406	567	
	1		Axial Brace Stiffness (lbs/in)	_	750	1910	
	2		Axiai Brace Stiffness (Ibs/in)	_	750	1960	
FB43	1	8.00	A.:- B Stare-th (lb-)	_	212	272	
FD43	2	0.00	Axial Brace Strength (lbs)	_	302	438	
	1		Torsional Moment (in-lbs)	_	152	343	
	2		i orsional /vioment (in-lbs)	_	461	526	

FastBridge™ Clip Angles (FB68) Allowable Clip Capacities (lbs)

					. ITILL INCLIC	
Product code	No. of screws to	Stud depth (in)	Allowable connector capacity		tud Thickness and Yield Strengt	:h
steel framing	otaa acptii (iii)	Anomable connector capacity	54mils (16ga)	68mils (14ga)	97mils (12ga)	
	1		A : LD C::CC (II /:)	3410	4410	6270
	2		Axial Brace Stiffness (lbs/in)	4010	6880	7585
FB68	1	2.625	A : ID	465	520	573
FBO8	2	3.625	Axial Brace Strength (lbs)	665	732	823
	1		T : IAA . (; II)	332	440	435
	2		Torsional Moment (in-lbs)	735	894	1150
	1		V : TD C::tt (II 1;)	3060	3440	6740
	2	4.00	Axial Brace Stiffness (lbs/in)	3710	4670	8960
FB68	1		A : ID	475	505	505
FB08	2		Axial Brace Strength (lbs)	676	752	878
	1		Torsional Moment (in-lbs)	382	462	564
	2			724	802	938
	1	,	V : TD C::(((II /:)	2270	3240	3200
	2		Axial Brace Stiffness (lbs/in)	2710	3870	3530
FB68	1	6.00	A : I.D. C (II.)	468	506	515
FD08	2	0.00	Axial Brace Strength (lbs)	682	788	885
	1		Tanianal Manager (in Iba)	294	412	670
	2		Torsional Moment (in-lbs)	686	758	1004
	1		A.:-I B \$+:ff (IL-/:-)	1940	2500	2530
	2	1	Axial Brace Stiffness (Ibs/in)	1960	2810	3015
FB68	1		A.:- B St th (lb-)	463	510	517
FD08	2 8.00	0.00	Axial Brace Strength (lbs)	637	747	898
	1		Torsional Moment (in-lbs)	310	512	674
	2		iorsional (vioment (in-lbs)	682	788	963


- 1 Allowable loads are based on the use of cold-formed steel studs with a minimum yield strength of Fy=33ksi and tensile strength of Fu=45ksi for 43mils (18ga) or thinner; and a minimum yield strength Fy=50ksi and tensile strength Fu=65ksi for 54mils (16ga) or thicker.
- 2 Allowable loads are based on 54mils (16ga) u-channel bridging with a minimum yield strength Fy=33ksi and tensile strength Fu=45ksi.
- 3 Allowable loads are for the bridging connection only. The strength and serviceability of the framing members is the responsibility of the designer.
- 4 Allowable loads are based on #10 self-drilling screws with a nominal diameter of 0.190 in. and a washer diameter of 0.375 in. Fasteners must have a minimum nominal shear strength of Pss=1718 lbs and a nominal tensile strength of Pts=2654 lbs.
- 5 Allowable loads may not be increased for wind or seismic load.
- 6 Allowable loads are for use when using ASD design methodology. For LRFD loads, multiply ASD allowable loads by 1.6.
- 7 Allowable brace loads are based on ultimate test loads divided by a safety factor. Serviceability limits are not considered. Brace stiffness requirements are detailed in AISI S100 Section D3.3.
- 8 Axial brace stiffness values apply to both ASD and LRFD designs.

CC33 3/4" Channel Clip

33mils (20 gauge) lateral bracing clip used to secure 3/4" U-channel (cold-rolled channel) to drywall studs.

The ClarkDietrich CC33 clip is used to secure U-Channel or Cold-Rolled Channel (CRC) to non-structural wall studs. The wall stud friction fit design allows for as few as one screw for the connection to the U-Channel.

The CC33 clip is a stiffened, G90 galvanized steel clip that's tested and designed to facilitate the rapid, efficient installation of 3/4" U-Channel lateral bracing for non-structural interior wall framing constructed of ProSTUD® Drywall Framing or non-structural studs. The CC33 clip should not be used in studs over 6" wide.



PRODUCT DIMENSIONS

Made to fit over 3/4" U-Channel and inside a drywall punchout.

Packaging: (200) pieces per bucket

Product weight: 0.12 lb/piece

MATERIAL SPECIFICATIONS

Gauge: 20 gauge (33 mils)

Design Thickness: 0.0346 inches

Coating: G90

Yield Strength: 33ksi ASTM: C645, A1003

ALTERNATIVE PRODUCTS

- U-Channel with SwiftClip™ LS-Series™ Support Clip
- Spazzer® 9200 Bridging Bar

INSTALLATION

CC33 clips are fastened using #8 self-drilling screws driven through the clip hole into the U-Channel. More than one screw may be needed depending on design. Design loads & tables can be found at clarkdietrich.com.

CC33 3/	4" Channe	Clip (CC33)	
	Th	Packaging	
Product code	Mils (Gauge)	Design thickness (in)	Packaging Pcs./Bucket
CC33	33mils (20ga)	0.0346	200

U.S. Patent No. D822,455



CC33 3/4" Channel Clip

DRYWALL BRIDGING CONNECTOR W/ PROSTUD DRYWALL STUDS

B I . I	6. 1	Stud thickness	Allowable Torsional Moment (in-lbs)		
Product code	Stud member	(mils)	1 - #8 Screw	2 - #8 Screw	
		PDS125-15	50	70	
		PDS125-19	70	90	
	362PDS125	PDS125-22	85	100	
		PDS125-30	90	125	
CC33		PDS125-33	90	135	
CC33		PDS125-15	70	85	
		PDS125-19	95	100	
	600PDS125	PDS125-22	95	100	
		PDS125-30	100	125	
		PDS125-33	100	140	

Notes:

- 1 Allowable loads are based on cold-formed steel studs with a minimum yield strength specified for ProSTUD Members.
- 2 Allowable loads are based on 54 mils (16ga) u-channel bridging with a minimum yield strength, Fy=33ksi and tensile strength, Fu=45ksi.
- 3 Allowable loads consider the bridging connection only. It is the responsibility of the designer to verify the strength and serviceability of the framing members.
- 4 Allowable loads are based on #8 self-drilling screws with a nominal diameter of 0.164-in and a head diameter of 0.272-in. Fasteners must have a minimum nominal shear strength, Pss=1278-lbs and a nominal tensile strength, Pts=586-lbs.
- 5 Screw shear strength is the average value, and tension strength is the lowest value listed on CFSEI Tech Note (F701-12).
- 6 Allowable loads may not be increased for wind or seismic load.
- 7 Allowable loads are for use when utilizing ASD (Allowable Stress Design) methodology. For LRFD loads multiply the ASD tabulated values by 1.6.

CC33 Maximum Bridging Distance (ft.)

		Stud thickness		Lateral Stud Pressure (psf)			
Stud spacing (in)	Stud member	(mils)		10psf	5psf	10psf	
			1 - #8 Screw	1 - #8 Screw	2 - #8 Screw	2 - #8 Screw	
		PDS125-15	8	4	8	5	
		PDS125-19	8	5	8	7	
	362PDS125	PDS125-22	8	7	8	8	
		PDS125-30	8	7	8	8	
12		PDS125-33	8	7	8	8	
IZ		PDS125-15	8	6	8	8	
		PDS125-19	8	8	8	8	
	600PDS125	PDS125-22	8	8	8	8	
		PDS125-30	8	8	8	8	
		PDS125-33	8	8	8	8	
	362PDS125	PDS125-15	6	3	8	4	
		PDS125-19	8	4	8	5	
		PDS125-22	8	5	8	6	
		PDS125-30	8	5	8	7	
16		PDS125-33	8	5	8	8	
16		PDS125-15	8	5	8	6	
		PDS125-19	8	6	8	6	
	600PDS125	PDS125-22	8	7	8	7	
		PDS125-30	8	7	8	8	
		PDS125-33	8	7	8	8	
		PDS125-15	4	2	5	3	
		PDS125-19	5	3	7	3	
	362PDS125	PDS125-22	7	3	8	4	
		PDS125-30	7	4	8	5	
24		PDS125-33	7	4	8	5	
24		PDS125-15	6	3	8	4	
		PDS125-19	8	4	8	4	
	600PDS125	PDS125-22	8	4	8	5	
		PDS125-30	8	5	8	6	
		PDS125-33	8	5	8	7	

- 1 Tabulated maximum bridging distances are for ASD lateral pressures.
- 2 Tabulated maximum bridging distances are based on the CC33 tested connection strength.
- 3 Studs must be checked for unbraced length seperately.
- 4 Lateral pressures shall be determined based on the load combinations of the applicable building code.

Bridging Termination Clip

U-Channel lateral bracing clip

The ClarkDietrich Bridging Termination clip is used to secure U-Channel or Cold Rolled Channel (CRC) to structural wall studs when used in load-bearing or curtain wall applications. (loads for structural stud gauges of 20, 18, 16, 14 & 12). The BTC's unique design allows for quicker installation in end-of-wall conditions.

The BTC is a stiffened, G90 galvanized steel clip that's tested and designed to facilitate rapid, efficient installation of 1-1/2" U-Channel lateral bracing for exterior curtain wall framing, load-bearing walls or high interior partitions constructed of structural studs.

BTC clips are fastened using #8 self-drilling screws; 2 screws between clip and U-channel and 2 screws between clip and stud flanges. The BTC clips are designed to be used with 3-5/8", 4" or 6" structural studs only.

U.S. Patent No. 10,851,539 B2

MATERIAL SPECIFICATIONS

Gauge: 18 gauge (43mils)

Design Thickness: 0.0451 inches

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Coating: G90


ASTM: A653/A653M, A1003/A1003M

ALTERNATIVE PRODUCTS

- FastBridgeTM Clip (FB33, FB43 & FB68)
- U-Channel with SwiftClip[™] LS-Series[™] Support Clip

INSTALLATION

Install the BTC by sliding the flanges of the clip over the open side of the stud and positioning the clip over the CRC using the guides on the underside of the clip. Once in place, fasten to the CRC using #8 screws. Finally, fasten the flanges of the clip to the stud flange by using #8 screws.



BTC for 3-5/8" studs

	Thickness						
Product code	Mils (Gauge)	Yield Strength	Design thickness (in)	Min. thickness (in)	Packaging Pcs./Bucket		
BTC3-43	43mils (18ga)		0.0451	0.0428	100		
BTC3-54	54mils (16ga)	50 ksi	0.0566	0.0538	100		
BTC3-68	68mils (14ga)		0.0713	0.0677	100		

BTC for 4" studs

	Thickness					
Product code	Mils (Gauge)	Yield Strength	Design thickness (in)	Min. thickness (in)	Packaging Pcs./Bucket	
BTC4-43	43mils (18ga)		0.0451	0.0428	100	
BTC4-54	54mils (16ga)	50 ksi	0.0566	0.0538	100	
BTC4-68	68mils (14ga)		0.0713	0.0677	100	



BTC for 6" studs

Thickness					
Product code	Mils (Gauge)	Yield Strength	Design thickness (in)	Min. thickness (in)	Packaging Pcs./Bucket
BTC6-43	43mils (18ga)		0.0451	0.0428	50
BTC6-54	54mils (16ga)	50 ksi	0.0566	0.0538	50
BTC6-68	68mils (14ga)		0.0713	0.0677	50

Bridging Termination Clip Load Tables

Product code	6. 11 .1	Clip	AH 11 52		Stud 7	Thickness, mils (¿	gauge)	
Product code	Stud depth	Mils (Gauge)	Allowable capacities	33mils (20ga)	43mils (18ga)	54mils (16ga)	68mils (14ga)	97mils (12ga)
BTC3	3-5/8"		Axial Brace Stiffness (lbs/in)	2120	2120	2120	2190	2190
BTC4	4"	43mils (18ga)	Axial Brace Strength (lbs)	215	235	240	280	280
BTC6	6"		Torsional Moment (in-lbs)	310	310	320	325	325
BTC3	3-5/8"		Axial Brace Stiffness (lbs/in)	2965	3135	3175	3345	3345
BTC4	4"	54mils (16ga)	Axial Brace Strength (lbs)	320	350	375	410	410
BTC6	6"		Torsional Moment (in-lbs)	510	515	520	525	525
BTC3	3-5/8"		Axial Brace Stiffness (lbs/in)	3915	4325	4525	4825	4825
BTC4	4"	68mils (14ga)	Axial Brace Strength (lbs)	460	500	555	570	570
BTC6	6"		Torsional Moment (in-lbs)	760	775	775	790	790

Notes:

- 1 Allowable loads are based on the use of cold-formed steel studs with a minimum yield strength, Fy=33 ksi and tensile strength, Fu=45 ksi for 43mils (18ga) or thinner and a minimum yield strength, Fy=50 ksi and tensile strength, Fu=65 ksi for 54 mils (16ga) or thicker.
- 2 Allowable loads are based on 54mils (16ga) U-Channel bridging with a minimum yield strength.
 - Fy=33 ksi and tensile strength, Fu=45 ksi.
- 3 Allowable loads are for the termination bridging connection only. The strength and serviceability of the framing members is the responsibility of the designer.
- 4 Allowable loads are based on minimum #8 self drilling with a minimum nominal diameter of 0.163-in and a minimum head diameter of 0.437-in. Fasteners must have a minimum nominal shear strength of, Pss=1452-lbs and a nominal tensile strength of, Pts = 2089 lbs.

(See ICC-ESR 1271 for fastener information.)

- 5 Allowable loads are based on the use of 2 screws between clip and U-Channel and 2 screws between clip and stud flanges.
- 6 Allowable loads may not be increased for wind or seismic load.
- 7 Allowable loads are for use when using ASD design methodology. For LRFD loads, multiply ASD allowable loads by 1.6.
- 8 Allowable brace loads were derived from nominal loads obtained from tests, divided by a safety factor. Serviceability limits are not considered. Brace stiffness requirements are detailed in AISI S100 Section D3.3.
- 9 Axial brace stiffness values apply to both ASD and LRFD designs.

EasyClip™ X-Series™ Clip Angle

Secures U-channel (cold-rolled channel) framing members for lateral bridging, or secures one framing member to another for rigid connections.


ClarkDietrich EasyClip™ X-Series™ clip angles are used to secure U-channel to wall studs for lateral bridging. U-Channel is passed through the stud knockout and an EasyClip X-Series clip is screw attached or welded to provide a rigid connection. X-Series clip angles and U-channel should not be used in lateral bridging when stud width exceeds 6."

ALTERNATIVE PRODUCTS

FastBridgeTM Clip
EasyClipTM U-SeriesTM Clip Angle
EasyClip S-SeriesTM Support Clip
SwiftClipTM LS-SeriesTM Support Clip
Spazzer® 5400 and Spazzer® 9200 Spacer Bars

PRODUCT DIMENSIONS

2" x 2" x 3-3/8" 2" x 2" x 5-3/4" 2" x 2" x 7-3/4" 2" x 2" x 9-3/4"



EasyClip	M X-Series M	Clip Angl	es
	T1 1 1		

	Thic	kness		De de eine
Product code	Mils (Gauge)	Design thickness (in)	Size (in)	Packaging Pcs./Bucket
X543	54mils (16ga)	0.0566	2 x 2 x 3-3/8	200
X545	54mils (16ga)	0.0566	2 x 2 x 5-3/4	170
X547	54mils (16ga)	0.0566	2 x 2 x 7-3/4	100
X549	54mils (16ga)	0.0566	2 x 2 x 9-3/4	100
X683	68mils (14ga)	0.0713	2 x 2 x 3-3/8	200
X685	68mils (14ga)	0.0713	2 x 2 x 5-3/4	100
X687	68mils (14ga)	0.0713	2 x 2 x 7-3/4	100
X689	68mils (14ga)	0.0713	2 x 2 x 9-3/4	80
X973	97mils (12ga)	0.1017	2 x 2 x 3-3/8	100
X975	97mils (12ga)	0.1017	2 x 2 x 5-3/4	100
X977	97mils (12ga)	0.1017	2 x 2 x 7-3/4	60
X979	97mils (12ga)	0.1017	2 x 2 x 9-3/4	60

MATERIAL SPECIFICATIONS

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Gauge: 12 gauge (97mils)

Design Thickness: 0.1017 inches

Coating: G90


Yield Strength: 50ksi **ASTM**: A653/A653M

INSTALLATION


EasyClip X-Series Clip Angles are attached to cold-formed steel (CFS) framing members using #10 minimum self-drilling screws driven through the clip holes into the steel framing. Four pilot clip holes are provided and should be filled when this clip is used in a bridging application. This clip should not be more than 1/4" less in width than the cold-formed framing member.



TYPICAL CONSTRUCTION DETAILS



Visit our CAD Library at clarkdietrich.com to view or download construction details in .dwg, .dxf, and .pdf formats.

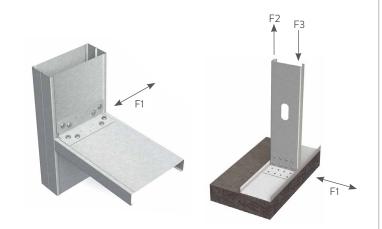

EasyClip™ X-Series™ Clip Angles Allowable Clip Capacities (lbs)

USING #10-16 SELF-DRILLING SCREWS

/			•								
					Stud Thickness and Yield Strength						
Product code		uct code No. of screws to steel framing		0ga (33mils) 33k	Oga (33mils) 33ksi		18ga (43mils) 33ksi		16ga (54mils) 50ksi		
	steer framing	F1	F2	F3	F1	F2	F3	F1	F2	F3	
X543	4	390 (390)	150 (531)	531	578 (578)	150 (788)	788	1028 (904)	150 (1400)	1400	
	3	449 (449)	231 (531)	531	666 (666)	231 (788)	788	1184 (1184)	231 (1400)	1400	
X545	5	677 (677)	231 (885)	885	1004 (1004)	231 (1313)	1313	1785 (1785)	231 (2333)	2333	
	7	974 (974)	231 (1239)	1239	1445 (1445)	231 (1838)	1838	2568 (1810)	231 (2617)	3267	
	5	761 (761)	311 (885)	885	1130 (1130)	311 (1313)	1313	2007 (2007)	311 (2333)	2333	
X547	7	1031 (1031)	311 (1239)	1239	1529 (1529)	311 (1838)	1838	2718 (2718)	311 (3267)	3267	
	9	1298 (1298)	311 (1593)	1593	1926 (1926)	311 (2363)	2363	3423 (2789)	311 (3527)	4200	
	7	1102 (1102)	391 (1239)	1239	1635 (1635)	391 (1838)	1838	2905 (2905)	391 (3267)	3267	
X549	9	1397 (1397)	391 (1593)	1593	2072 (2072)	391 (2363)	2363	3682 (3682)	391 (4200)	4200	
	11	1690 (1690)	391 (1947)	1947	2508 (2508)	391 (2889)	2889	4457 (3779)	391 (4437)	5133	
X683	4	390 (390)	238 (531)	531	578 (578)	238 (788)	788	1028 (1028)	238 (1400)	1400	
	3	449 (449)	365 (531)	531	666 (666)	365 (788)	788	1184 (1184)	365 (1400)	1400	
X685	5	677 (677)	365 (885)	885	1004 (1004)	365 (1313)	1313	1785 (1785)	365 (2333)	2333	
	7	974 (974)	365 (1239)	1239	1445 (1445)	365 (1838)	1838	2568 (2278)	365 (3267)	3267	
	5	761 (761)	492 (885)	885	1130 (1130)	492 (1313)	1313	2007 (2007)	492 (2333)	2333	
X687	7	1031 (1031)	492 (1239)	1239	1529 (1529)	492 (1838)	1838	2718 (2718)	492 (3267)	3267	
	9	1298 (1298)	492 (1593)	1593	1926 (1926)	492 (2363)	2363	3423 (3423)	492 (4200)	4200	
	7	1102 (1102)	619 (1239)	1239	1635 (1635)	619 (1838)	1838	2905 (2905)	619 (3267)	3267	
X689	9	1397 (1397)	619 (1593)	1593	2072 (2072)	619 (2363)	2363	3682 (3682)	619 (4200)	4200	
	11	1690 (1690)	619 (1947)	1947	2508 (2508)	619 (2889)	2889	4457 (4457)	619 (5133)	5133	
X973	4	390 (390)	485 (531)	531	578 (578)	485 (788)	788	1028 (1028)	485 (1400)	1400	
	3	449 (449)	531 (531)	531	666 (666)	743 (788)	788	1184 (1184)	743 (1400)	1400	
X975	5	677 (677)	743 (885)	885	1004 (1004)	743 (1313)	1313	1785 (1785)	743 (2333)	2333	
	7	974 (974)	743 (1239)	1239	1445 (1445)	743 (1838)	1838	2568 (2568)	743 (3267)	3267	
	5	761 (761)	885 (885)	885	1130 (1130)	1002 (1313)	1313	2007 (2007)	1002 (2333)	2333	
X977	7	1031 (1031)	1002 (1239)	1239	1529 (1529)	1002 (1838)	1838	2718 (2718)	1002 (3267)	3267	
	9	1298 (1298)	1002 (1593)	1593	1926 (1926)	1002 (2363)	2363	3423 (3423)	1002 (4200)	4200	
	7	1102 (1102)	1239 (1239)	1239	1635 (1635)	1260 (1838)	1838	2905 (2905)	1260 (3267)	3267	
X979	9	1397 (1397)	1260 (1593)	1593	2072 (2072)	1260 (2363)	2363	3682 (3682)	1260 (4200)	4200	
	11	1690 (1690)	1260 (1947)	1947	2508 (2508)	1260 (2889)	2889	4457 (4457)	1260 (5133)	5133	

Notes:

Screw Capacity Notes:

- 1 The tabulated value indicates the number of screws in a single clip leg attached to the cold-formed steel (CFS) framing.
- 2 Screws shall be attached in a symmetric manner starting at the top and bottom and moving toward the center.
- 3 The allowable values for F1 are based only on the shear capacity of the clip leg attached to the CFS framing. The capacity of the attachment to other materials and structures must be checked separately.
- 4 The allowable values for F2 assume mechanical fasteners are attached to the structure, and are located no more than 1" away from the angle bend. Mechanical fasteners to other materials and structures must be checked separately.
- 5 This table is intended for use by qualified engineers only. It is the responsibility of the engineer to verify that the tabulated values apply to a specific connection application.
- 6 When clips have combinations of F1, F2 and F3, use a linear interaction for combinations of F1 and F3, and a squared interaction for combinations of F1 and F2.

- 7 Allowable loads have not been increased 33% for wind or seismic.
- 8 For connections made to 14ga (68mils) and 12ga (97mils), use the tabulated values for 16ga (54mils), 50ksi.
- 9 It is the responsibility of the design professional to detail the drawings for proper clip attachment.
- 10 Contact Clark Dietrich Technical Services at 888-437-3244 for assistance.

Weld Capacity Notes:

- 1 F1 and F2 values in parentheses are maximum shear and tension capacities when the clips are welded to the base structure (min 3/16"-36ksi steel).
- 2 Listed weld capacities are computed assuming an E70XX welding rod or wire.
- 3 The clips are to be welded to the structure along the back corner along the complete length of the clip. When secondary welds are used to hold the clip in place, they are not used in capacity calculations.

Spazzer® 9200 Spacer Bar

Facilitates the rapid erection of interior, nonload-bearing, nonstructural studs into a rigid, accurately laid out gridwork.

The TradeReady® Spazzer® 9200 spacer bar is a prenotched, 20 gauge, galvanized steel spacer and bridging bar. The Spazzer 9200 bar facilitates rapid erection of studs into a rigid, accurately laid out gridwork that has excellent resistance to stud rotation and displacement. Hanging drywall is also faster and easier because the Spazzer 9200 bar eliminates the bow that often occurs in tall interior studs. TradeReady Spazzer 9200 bar is a 20 gauge bar that is 50" long and prenotched to hold studs rigidly on 16" or 24" centers. The slots have been pre-engineered to hold studs in place by utilizing "shear" to bridge studs into a rigid gridwork. Eliminates clip angles and saves up to 40% in combined labor and material costs.

ALTERNATIVE PRODUCTS

U-Channel with EasyClip™ U-Series™ Clip Angle U-Channel with SwiftClip™ LS-Series™ Support Clip Spazzer® 5400 Spacer Bar

PRODUCT DIMENSIONS

7/8" x 7/8" x 50"

MATERIAL SPECIFICATIONS

Gauge: 20 gauge (33mils)

Design Thickness: 0.0346 inches

Coating: G40


Yield Strength: 33ksi

ASTM: C645, A653/A653M

INSTALLATION

Insert the prenotched, 50" Spazzer bar through the appropriate stud punchouts and rotate the bridging bar to engage or grip the stud. Use the prenotched slots to automatically lay out studs on 16" or 24" centers. Press the Spazzer bar firmly into place. Overlap the last slot with the next piece of Spazzer and continue to repeat the process.



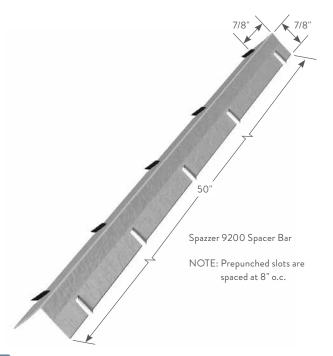

Spazzer® 9200 Spacer Bar (SPZD)

Product code	Th	ickness	<u>.</u>	Packaging		
	Mils (Gauge) Design thickness (in)		Size (in)	Pcs./ Carton	Pcs./ Skid	
SPZD	33mils (20ga)	0.0346	7/8 x 7/8 x 50	25	1350	

Spazzer® 5400 Spacer Bar, Bar Guard™ & Grommet

Engineered to facilitate the rapid erection of exterior curtain wall framing.

ClarkDietrich TradeReady® Spazzer® 5400 (16 gauge and 18 gauge) spacer bar is a pre-notched, galvanized steel spacer and bridging bar, engineered to facilitate the rapid, efficient erection of exterior curtain wall framing, load-bearing walls and high interior partitions constructed of structural studs. Until now, most bridging in steel studs was accomplished with cold-rolled channel that required bridging clips or welding. The Spazzer bridging bar is equipped with proprietary prepunched slots that reduce installation costs up to 40% and provide excellent torsional and lateral stud restraint. The Spazzer Bar Guard™ retainer clip or the Spazzer snap-in grommet should be used to secure the Spazzer bar when used in load-bearing applications.

ALTERNATIVE PRODUCTS

U-Channel with EasyClip[™] U-Series[™], U-Channel with SwiftClip[™] LS-Series[™] Support Clip, U-Channel with FastBridge Clip, Block and Strap

PRODUCT DIMENSIONS

1-1/4" x 1-1/4" x 50"

MATERIAL SPECIFICATIONS

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Gauge: 18 gauge (43mils)

Design Thickness: 0.0451 inches

Coating: CP60 Yield Strength: 50ksi


ASTM: A653/A653M, C955

LOAD-BEARING WALL INSTALLATION

The TradeReady Spazzer bar is passed through the stud knockouts and rotated 90° into position, engaging each side of the knockout. For load-bearing studs, the Spazzer bar guard bar retainer clip and the Spazzer snap-in grommet both require screws to keep the bar in place. The TradeReady Spazzer bar should be installed at a maximum 4' o.c. vertically or per specification The Spazzer 5400 is not designed for use with 12ga and heavier structural studs and should not be used in studs over 8" wide.

NONLOAD-BEARING WALL INSTALLATION

The TradeReady Spazzer bar is passed through the stud knockouts and rotated 90° into position, engaging each side of the knockout. For 20 gauge studs, the Spazzer bar guard retainer clip and the Spazzer snap-in grommet both require screws to keep the bar in place. The TradeReady Spazzer bar should be installed at maximum 5' o.c. vertically or per specification. The Spazzer 5400 is not designed for use with 12ga and heavier structural studs and should not be used in studs over 8" wide.






Spazzer® 5400 Spacer Bar (SPZS)

	Б. І	Thick	cness		Packaging			
	Product code	Mils (Gauge)	Design thickness (in)	Size (in)	Pcs./Carton	Pcs./Skid		
	SPZS-54	54mils (16ga)	0.0566	1-1/4 x 1-1/4 x 50	20	680		
ſ	SPZS-43	43mils (18ga)	0.0451	1-1/4 x 1-1/4 x 50	20	680		

Spazzer® Bar Guard™ (SPBG) and Spazzer® Grommet (SPGR)

Product code	Size (in)	Packaging Pcs./Carton
SPBG	3-1/4 x 1-5/8	100
SPGR	1-1/2 x 4	100



Spazzer® 5400 Spacer Bar (16ga)

Spazzer® 5400 Spacer Bar Connection Strength and Stiffness

Product code	Stud depth	Allowable Capacities	Stud Thickness mils (ga)				
1 Todact code	(in)	Allowable dapactates	33mils (20ga)	43mils (18ga)	54mils (16ga)	68mils (14ga)	
		Brace stiffness (lbs/in)	1320	1984	2792	3120	
	3-5/8	Brace strength (lbs)	310	420	570	570	
		Torsional Moment (in-lbs)	325	400	535	630	
	6	Brace stiffness (lbs/in)		1680	2240	2400	
SPZS54		Brace strength (lbs)	300	400	555	555	
		Torsional Moment (in-lbs)	265	365	610	705	
		Brace stiffness (lbs/in)	-	1080	1440	2176	
	8	Brace strength (lbs)	-	395	525	525	
		Torsional Moment (in-lbs)	_	405	560	680	

- 1 Allowable loads are based on the use of cold-formed steel studs with a minimum yield strength, Fy=33 ksi and tensile strength, Fu=45 ksi for 43mils (18ga) or thinner and a minimum yield strength, Fy=50 ksi and tensile strength, Fu=65 ksi for 54mils (16ga) or thicker.
- 2 Allowable loads are based on 54mils (16ga) 5400 Spazzer Bar with a minimum yield strength, Fy=50 ksi and tensile strength, Fu=65 ksi.
- 3 Allowable loads are for the bridging connection only. The strength and serviceability of the framing members is the responsibility of the designer.
- **4** Allowable loads may not be increased for wind or seismic load.
- 5 Allowable loads are for use when using ASD design methodology. For LRFD loads, multiply ASD allowable loads by 1.6.
- 6 Allowable brace loads are based on ultimate test loads divided by a safety factor. Serviceability limits are not considered. Brace stiffness requirements are detailed in AISI S100 Section D3.3.
- **7** Axial brace stiffness values apply to both ASD and LRFD designs.
- 8 Listed Spazzer Bar capacities are based on Spazzer Bar fully seated in the bottom of the stud knockout as shown in Figure-1.



Figure-1

Spazzer® 5400 Spacer Bar Maximum Bridging Distance (ft.) Lateral stud pressure (psf) Stud thickness Product Stud section spacing (in) code mils (ga) 33mils (20ga) 43mils (18ga) 362S162 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 600S162 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 600S200 54mils (16ga) 68mils (14ga) 43mils (18ga) 54mils (16ga) 800S162 68mils (14ga) 43mils (18ga) 800S200 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 362S162 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 362S200 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 600S162 54mils (16ga) SPZS54 68mils (14ga) 33mils (20ga) 43mils (18ga) 600S200 54mils (16ga) 68mils (14ga) 43mils (18ga) 54mils (16ga) 800S162 68mils (14ga) 43mils (18ga) 800S200 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 362S162 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 600S162 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 600S200 54mils (16ga) 68mils (14ga) 43mils (18ga) 54mils (16ga) 800S162 68mils (14ga) 43mils (18ga) 800S200 54mils (16ga) 68mils (14ga)

- 1 Tabulated maximum bridging distances are for ASD lateral pressures.
- Tabulated maximum bridging distances are based on the tested connection strength.
- 3 Studs must be checked for unbraced length
- 4 Lateral pressures shall be determined based on the load combinations of the applicable building code.
- 5 For designs using 2009 IBC and earlier, wind pressures are at the working stress level and may be used directly.
- 6 For designs using 2012 IBC and 2015 IBC, wind pressures are at the strength level and must be multiplies by 0.6 for ASD load combinations.

Spazzer® 5400 Spacer Bar (18ga)

Spazzer® 5400 Spacer Bar Connection Strength and Stiffness

Product code	Stud depth	Allowable Capacities	Stud Thickness mils (ga)				
1 Todact code	(in)	Allowable dapactates	33mils (20ga)	43mils (18ga)	54mils (16ga)	68mils (14ga)	
		Brace stiffness (lbs/in)	525	735	1160	1380	
	3-5/8	Brace strength (lbs)	310	360	360	360	
		Torsional Moment (in-lbs)	150	240	300	300	
		Brace stiffness (lbs/in)		420	520	890	
SPZS43	6	Brace strength (lbs)	300	340	340	340	
		Torsional Moment (in-lbs)	210	250	290	290	
		Brace stiffness (lbs/in)	-	240	430	650	
	8	Brace strength (lbs)	-	290	320	320	
		Torsional Moment (in-lbs)	_	230	250	280	

- 1 Allowable loads are based on the use of cold-formed steel studs with a minimum yield strength, Fy=33 ksi and tensile strength, Fu=45 ksi for 43mils (18ga) or thinner and a minimum yield strength, Fy=50 ksi and tensile strength, Fu=65 ksi for 54mils (16ga) or thicker.
- 2 Allowable loads are based on 43mils (18ga) 4300 Spazzer Bar with a minimum yield strength, Fy=33 ksi and tensile strength, Fu=45 ksi.
- 3 Allowable loads are for the bridging connection only. The strength and serviceability of the framing members is the responsibility of the designer.
- **4** Allowable loads may not be increased for wind or seismic load.
- 5 Allowable loads are for use when using ASD design methodology. For LRFD loads, multiply ASD allowable loads by 1.6.
- 6 Allowable brace loads are based on ultimate test loads divided by a safety factor. Serviceability limits are not considered. Brace stiffness requirements are detailed in AISI S100 Section D3.3.
- **7** Axial brace stiffness values apply to both ASD and LRFD designs.
- 8 Listed Spazzer Bar capacities are based on Spazzer Bar fully seated in the bottom of the stud knockout as shown in Figure-1.




Figure-1

Spazzer® 5400 Spacer Bar Maximum Bridging Distance (ft.) Lateral stud pressure (psf) Stud thickness Product Stud section spacing (in) code mils (ga) 33mils (20ga) 43mils (18ga) 362S162 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 600S162 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 600S200 54mils (16ga) 68mils (14ga) 43mils (18ga) 54mils (16ga) 800S162 68mils (14ga) 43mils (18ga) 800S200 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 362S162 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 362S200 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 600S162 54mils (16ga) SPZS43 68mils (14ga) 33mils (20ga) 43mils (18ga) 600S200 54mils (16ga) 68mils (14ga) 43mils (18ga) 54mils (16ga) 800S162 68mils (14ga) 43mils (18ga) 800S200 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 362S162 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 600S162 54mils (16ga) 68mils (14ga) 33mils (20ga) 43mils (18ga) 600S200 54mils (16ga) 68mils (14ga) 43mils (18ga) 54mils (16ga) 800S162 68mils (14ga) 43mils (18ga) 800S200 54mils (16ga) 68mils (14ga)

- 1 Tabulated maximum bridging distances are for ASD lateral pressures.
- Tabulated maximum bridging distances are based on the tested connection strength.
- 3 Studs must be checked for unbraced length
- 4 Lateral pressures shall be determined based on the load combinations of the applicable building code.
- 5 For designs using 2009 IBC and earlier, wind pressures are at the working stress level and may be used directly.
- 6 For designs using 2012 IBC and 2015 IBC, wind pressures are at the strength level and must be multiplies by 0.6 for ASD load combinations.

Spazzer® Bar Fly Clip


A prepunched clip that eliminates the need for cutting and bending when using the Spazzer® 5400 Spacer Bar to facilitate rapid installation of exterior curtain wall framing.

The Spazzer bar fly clip is a secure, fast and efficient way to finish a wall section when using the TradeReady® Spazzer 5400 spacer bar to facilitate the rapid erection of curtain wall or load-bearing framing. Traditionally, at the end of a section, the Spazzer bar would need to be cut and bent to keep the bar in place. With the new Spazzer bar fly clip, installation is as easy as fastening the prepunched clip to the stud and the Spazzer bar. The excess Spazzer bar is cut and installation is complete.

The Spazzer fly clip is the perfect solution for installing off-module studs with the 5400 series Spazzer bar. Simply cut the Spazzer bar just short of the stud web, and use the Spazzer fly clip to quickly connect the Spazzer bar to the face of the stud with self-drilling framing screws.

ALTERNATIVE PRODUCTS

Traditional cutting and bending



S	pa	ZZ	er®	Bar	Fly	Clip	(SFL)	()	
					-				

	, , , , , , , , , , , , , , , , , , ,	
Product code	Size (in)	Packaging Pcs./Carton
SFLY	1 x 1-1/4 x 1	100

PRODUCT DIMENSIONS

1" x 1-1/4" x 1"

MATERIAL SPECIFICATIONS

Gauge: 18 gauge (43mils)

Design Thickness: 0.0451 inches


Coating: G90

Yield Strength: 50ksi ASTM: A653/A653M

LOAD-BEARING WALL INSTALLATION

The TradeReady Spazzer 5400 spacer bar is passed through the stud knockouts and rotated 90° into position, engaging each side of the knockout. In load-bearing applications, some type of attachment is required to keep the bar in place—the Spazzer bar fly clip is an optimum solution. The TradeReady Spazzer 5400 bar should be installed at a maximum 4' o.c. vertically or per specifications. The Spazzer bar should not be used in studs over 6" wide.

TYPICAL CONSTRUCTION DETAILS



Visit our CAD Library at clarkdietrich.com to view or download construction details in .dwg, .dxf, and .pdf formats.

FastBack™ Backing System

Reduces finishing time with no exposed fasteners on the face of the product.

The FastBack™ backing system features a universal design that works with studs in either direction— concealing fasteners on the face of the product. The system creates an interlocked design between the stud and track for baseboard backing installations; and a cutaway design allows backing and bracing to be installed all the way to the floor. Optional pre-cut and fire-rated D-Blaze® or FlamePRO® Wood Backing is sized to fit 12," 16" and 24" o.c. spacing and can be used with the FBBC5 or FBBC10 clip. Available for overnight delivery. FBBC5-2X, 162-FBBC5-2X and 200-FBBC5-2X are designed to support traditional 2X lumber.

INSTALLATION

Rotate the FastBack clip over the flange of the stud until it sits flush. Fasten into place using drywall screws in the pre-drilled holes. Place wood onto tabs and fasten into place using standard drywall screws.



FastBack™ Backing	System
-------------------	--------

Product code	Stud Flange (F)	Height (H)	Backing (B)	Packaging Pcs./Carton
FBBC5	1-1/4"	5-1/8"	3/4" (5 ply)	100
FBBC10	1-1/4"	10-1/4"	3/4" (5 ply)	100
FBBC5-2X	1-1/4"	5-1/8"	3/4" (5 ply)	100
162-FBBC-2X	1-5/8"	5-1/8"	1-1/2" (2X lumber)	100
200-FBBC5-2X	2"	5-1/8"	1-1/2" (2X lumber)	100

Wood Backii	ng		
Product code	Height (in)	Length (in)	Packaging Pcs./Skid
5FBW12	5-1/8"	10-1/2"	720
5FBW16	5-1/8"	14-1/2"	540
5FBW24	5-1/8"	22-1/2"	360
10FBW12	10-1/4"	10-1/2"	720
10FBW16	10-1/4"	14-1/2"	540
10FBW24	10-1/4"	22-1/2"	360

U.S. Patent No. 7,882,676 of Jeffrey Thomas Ellis

D-Blaze® is a registered trademark of Viance, LLC

FlamePRO® is a registered trademark of Koppers Performance Chemicals, Inc.

FlamePRO® Fire Retardant complies with or has been granted the following:

- UL GREENGUARD Gold Certification UL 2818
- ICC ESR-4244
- AWPA E12, AWPA M4, AWPA P50, AWPA T1 standard
- Cal Fire Certified
- · American Institute of Architects Approved
- ASTM 2768
- ASTM D3201, D5516, D5664, E84, E119, 2768, D6305, D6841
- · AWPAT1
- AWPA UC-1
- · Class A FRT wood
- · UL Recognized Component
- NFPA 703, 101 Life Safety Code
- · City of Los Angeles Building Code
- City of Los Angeles Residential Code
- National Building Code of Canada
- One & two hour tested wall assemblies
- 50-year warranty
- \bullet UL Classified with an FR-S Rating for flame spread and smoke development values of 25 or less (All are subject to revision, re-examination)

D-Blaze® Fire Retardant or D-Blaze® FRT Wood complies with or has been granted the following:

- ASTM E84
- ASTM D3201
- ASTM D5516
- ASTM D5664
- Underwriters Laboratories Classified
- UL Class A (Class 1) with FR-S Rating CAN/ULC S102 & S102.2
- GREENGUARD Gold Certified
- National Fire Protection ASsociation (NFPA 255)
- City of Los Angeles Research Report: RR24502 in accordance with ICC-ES ESR 2645

Backing (B) 1"

- New York City Building Code (MEA Numbers 406-87 and 407-87)
- National Building Code of Canada
- AWPA Standarized (P50, U1, UCFA) Interior Type A-High Temperature (HT) FRTW
- California Department of Forestry and Fire Protection CSFM BML Listings for D-Blaze Plywood and Lumber
- ICC-ES ESR-2645
- 50-year warranty

(All are subject to revision, re-examination)

Danback® Flexible Wood Backing Plate

Reduces steel stud backing labor costs by up to 75%.

Danback® Flexible Wood Backing System, featuring D-Blaze® or FlamePRO® fire-retardant treated wood (FRT), has made wood backing installation easy and economical-eliminating cutting, notching, ripping and routing.

Danback provides superior connection shear and pullout strength to support and meet even some of the heaviest loading conditions. Simply snap, flex and screw Danback into place. The patented hinge design actually flexes around the stud and snaps into place for a perfect fit-every time.

- Provides extra screw pullout strength for heavy-duty backing applications
- Available in 48" sections, for either 16" or 24" o.c. framing
- Meets all specifications for commercial and residential applications

Perfect backing system for baseboards, door jams and wood trim, cabinets and vanities and ceiling and crown moldings.

The Evaluation Report Service found that the wood backing material complies with the requirements for fire retardant treated wood described in the International Building Codes (IBC & IRC).

Danback flexible wood backing is available with FSC®-certified lumber and may contribute LEED® points to your project.

MATERIAL SPECIFICATIONS

Material: 3/4" CDX Doug Fir fire-retardant treated wood

Dimensions: 5-1/8" x 48" (130mm x 1219mm)

Packaging: (250) pieces per skid Product weight: 5.114 lbs/piece

Danbac Backing				
Product code	Width (in)	Length (in)	Spacing	Packaging Pcs./Skid
D16F*	5-1/8	48	16" o.c.	250
D24F*	5-1/8	48	24" o.c.	250
D16C**	5-1/8	48	16" o.c.	250
D24C**	5-1/8	48	24" o.c.	250



Trimmables available for off-module spacing in bulk quantity.

 ${}^{**}\mathsf{FSC}\text{-certified lumber available on request, which can contribute to LEED}{}^{\circ}\mathsf{\ points\ on\ your\ project.}$

 ${\sf Contact\ Clark Dietrich\ LEED\ professionals\ at\ 888-437-3244\ for\ more\ information.}$

FSC chain-of-custody # BV-COC-008121

Load Tables	
Installation condition	Nominal (lbs)
Shear / 0" Offset	2440
Shear / 1" Offset	825
Shear / 3" Offset	310
Tension	635

U.S. Patent Nos. 6,705,056 is owned by Kathy Tollenaar


Danback® is a trademark of Kathy Tollenaar

D-Blaze® is a registered trademark of Viance, LLC

FlamePRO® is a registered trademark of Koppers Performance Chemicals, Inc.

- 1 Listed load values are nominal test load values, appropriate safety factors/resistance factors should be applied by the designer for calculating loads for intended use.
- 2 Shear / Offset (moment-rotation) Load refers to load directed in the plane of the wall.
- 3 Tension Load refers to load directed perpendicular to wall or plywood surface.
- 4 Tabulated loads include the contribution of 5/8" gypsum board.
- 5 Test loads were applied to the gypsum board and backing system through a 1/2" thick, 2-3/4" diameter steel plate secured with (4) #12 hex head screws.





- 6 Loads were applied directly through the steel plate or to a steel rod that cantilevered from the plate.
- 7 Typical failure mode in backing testing was the gypsum board failure.
- 8 24-in o.c. stud spacing test results were similar/identical to 16-in o.c. test results.
- 9 Listed nominal capacities are based on using 33mils (20ga) non-structural framing members/studs.
- 10 Anchor to the stud flange using (3) #8 wafer head/pan head screws.

Easy installation.



Snap starter edge into the open side of the stud flange.



Repeat the process.



HINT: Start with the first full bay. Use Danback trimmables for off-module bays.



Overlap connector plates when using in long backing runs.



Flex Danback flexible wood backing around stud flange using the flexible connector plate.



Secure each plate to the stud flange using three small pan or wafer-head screws.

Commonly used in: hospitals, medical centers, schools, hotels/motels, assisted living, condominiums, and others. The perfect backing solution for: cabinets, shelves, counters, sinks, handrails, chalkboards, towel and shower bars, or other wall-mounted fixtures that require heavy-duty backing.




Use Danback trimmables for off-module bays:



Connector plates included with trimmables.

Danback trimmables for off-module backing.

Cut to required length. Secure connector plate to the trimmed edge. Leave 1-1/4" extended over the trimmed edge. Fasten the plate to Danback using three small pan or wafer-head screws.



FlamePRO° Fire Retardant complies with or has been granted the following:

- UL GREENGUARD Gold Certification UL 2818
- ICC ESR-4244
- · AWPA E12, AWPA M4, AWPA P50, AWPA T1 standard
- · Cal Fire Certified
- · American Institute of Architects Approved
- ASTM 2768
- ASTM D3201, D5516, D5664, E84, E119, 2768, D6305, D6841
- · AWPAT1
- · AWPA UC-1
- · Class A FRT wood
- UL Recognized Component
- NFPA 703, 101 Life Safety Code
- · City of Los Angeles Building Code • City of Los Angeles Residential Code
- National Building Code of Canada
- One & two hour tested wall assemblies
- 50-year warranty
- UL Classified with an FR-S Rating for flame spread and smoke development values of 25 or less (All are subject to revision, re-examination)

D-Blaze® Fire Retardant or D-Blaze® FRT Wood complies with or has been granted the following:

- ASTM E84
- ASTM D3201
- ASTM D5516
- ASTM D5664
- · Underwriters Laboratories Classified
- UL Class A (Class 1) with FR-S Rating CAN/ULC S102 & S102.2
- GREENGUARD Gold Certified
- National Fire Protection ASsociation (NFPA 255)
- City of Los Angeles Research Report: RR24502 in accordance with ICC-ES ESR 2645
- New York City Building Code (MEA Numbers 406-87 and 407-87)
- · National Building Code of Canada
- AWPA Standarized (P50, U1, UCFA) Interior Type A-High Temperature (HT) FRTW
- California Department of Forestry and Fire Protection CSFM BML Listings for D-Blaze Plywood and Lumber
- ICC-ES ESR-2645
- 50-year warranty

(All are subject to revision, re-examination)

Backer Bar

Provides superior connection shear and pullout strength for handrails, shelves and other wall fixtures

The Backer Bar was specifically designed to meet the demand for the attachment of multiple items and heavier items to interior partitions.

Today's building professionals require solutions to allow the attachment of such products and accessories to the interior partition walls. Traditionally, backing systems have been costly, time-consuming and not necessarily performing to the required code specified load requirements. Backer Bar is designed for use on nonstructural and structural studs.

TYPICAL APPLICATIONS:

- Wall-Mounted Televisions
- Hospital Handrails
- Towel and Shower Bars
- · Cabinets and Shelves

FEATURES AND BENEFITS:

- · Installs quickly and easily
- · Available in 12", 16" and 24" spacing
- For use on non-structural and structural studs

Canada Patent Pending - 2,811,362 USA Patent - 9,062,455

PRODUCT DIMENSIONS

Leg: 1-1/4" Width: 5"

Lengths: For 12", 16" and 24" o.c. stud spacing


MATERIAL SPECIFICATIONS

Gauge: 20 gauge STR (33mils)

Design Thickness: 0.0346 inches

Coating: G90

Material: Grade 50ksi min. yield strength

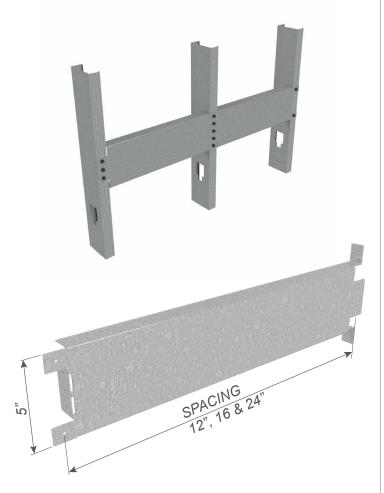

Backer Bar (BB12, BB16, BB24)

	Thi	ckness				
Product code	Mils (Gauge)	Design thickness (in)	Size (in)	Packaging		
BB12	33mils (20ga)	0.0346	1-1/4" x 5" x 12"			
BB16	33mils (20ga)	0.0346	1-1/4" x 5" x 16"	Individual		
BB24	33mils (20ga)	0.0346	1-1/4" x 5" x 24"			

BlazeFrame® Shield

33mils, 43mils or 54mils fire shield system

Clark Dietrich's Blaze Frame Shield is specifically designed for use in conjunction with approved fireblocking materials per section 718 of the IBC. Blaze Frame Shield simply installs by twisting into stud flanges and screwing into stud webs. The one piece preformed assembly eliminates cutting, notching and attaching clips.

- Installs quickly and easily without clips
- · Available for 16" and 24" stud spacing
- · Three available widths
- Available in 33mils (20ga), 43mils (18ga) or 54mils (16ga)
- Pre-notched for use on structural studs (1-5/8" flange only)

PRODUCT DIMENSIONS

Horizontal leg: 1"

Connection Tabs: Top: 2", Bottom: 1-1/2"

Width: 3-5/8", 4" or 6"

Lengths: For 16" and 24" o.c. stud spacing

		Frar	R	•	
- 61	270	Frar	ma i	hie	

	Thic	kness	
Product code	roduct code Mils (Gauge)		Size (in)
FS316-33	33mils (20ga)	0.0346	3-5/8" web 16" o.c.
FS316-43	43mils (18ga)	0.0451	3-5/8" web 16" o.c.
FS316-54	54mils (16ga)	0.0566	3-5/8" web 16" o.c.
FS324-33	33mils (20ga)	0.0346	3-5/8" web 24" o.c.
FS324-43	43mils (18ga)	0.0451	3-5/8" web 24" o.c.
FS324-54	54mils (16ga)	0.0566	3-5/8" web 24" o.c.
FS416-33	33mils (20ga)	0.0346	4" web 16" o.c.
FS416-43	43mils (18ga)	0.0451	4" web 16" o.c.
FS416-54	54mils (16ga)	0.0566	4" web 16" o.c.
FS424-33	33mils (20ga)	0.0346	4" web 24" o.c.
FS424-43	43mils (18ga)	0.0451	4" web 24" o.c.
FS424-54	54mils (16ga)	0.0566	4" web 24" o.c.
FS616-33	33mils (20ga)	0.0346	6" web 16" o.c.
FS616-43	43mils (18ga)	0.0451	6" web 16" o.c.
FS616-54	54mils (16ga)	0.0566	6" web 16" o.c.
FS624-33	33mils (20ga)	0.0346	6" web 24" o.c.
FS624-43	43mils (18ga)	0.0451	6" web 24" o.c.
FS624-54	54mils (16ga)	0.0566	6" web 24" o.c.

MATERIAL SPECIFICATIONS

Gauge: 20 gauge STR (33mils)

Design Thickness: 0.0346 inches

Gauge: 18 gauge (43mils)

Design Thickness: 0.0451 inches

Gauge: 16 gauge (54mils)


Design Thickness: 0.0566 inches

Coating: CP60

Yield Strength: 33ksi for 33mils & 43mils

50ksi for 54mils

ASTM: C955, A1003

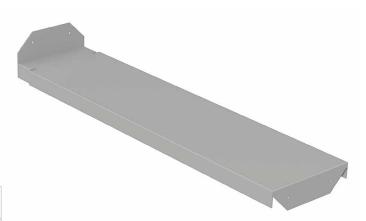



2x6 FR Blocking

Fire-retardant treated wood blocking for non-structural steel framing

2x6 fire-retardant treated wood blocking for non-structural steel framing with dado groove to latch on to flanges and span between wall partitions to provide attachment surface for wall mounted fixtures.

2x6 FR Blocking is fire-retardant, pressure-treated wood that is chemically treated to reduce flamespread and smoke development. Fire-retardant wood complies with national building codes, including the International Building Code (IBC) and the International Residential Code (IRC).


D-Blaze® is a registered trademark of Viance, LLC.



Size: 1-1/2" x 5-1/2" x 15-3/4"

FEATURES AND BENEFITS:

- D-Blaze® Fire-Retardant Treatment
- Constructed from Southern Yellow Pine (SYP)
- Dado groove provides secure and flush mounting surface
- Pre-cut for 16" o.c. spacing
- · Provides reinforcement to the structural integrity of the walls for stability of wall-mounted fixtures
- 50 year warranty




Material: Southern Yellow Pine (SYP) treated with D-Blaze® fire-retardant treatment Product weight: 2.35 lbs. / piece





INSTALLATION

Secure wood blocking into place using stainless steel or hot-dip galvanized fasteners. On one side, insert fasteners through the stud flange and into the face of the blocking and for the other side insert fasteners through the stud web and into the butt end of the blocking.




D-Blaze® Fire Retardant or D-Blaze® FRT Wood complies with or has been granted the following:

- ASTM E84
- ASTM D3201
- ASTM D5516
- ASTM D5664
- Underwriters Laboratories Classified
- UL Class A (Class 1) with FR-S Rating CAN/ULC S102 & S102.2
- UL GREENGUARD Gold Certified UL 2818
- National Fire Protection Association (NFPA 255)
- City of Los Angeles Research Report: RR24502 in accordance with ICC-ES ESR 2645
- New York City Building Code (MEA Numbers 406-87 and 407-87)
- · National Building Code of Canada
- AWPA Standarized (P50, U1, UCFA) Interior Type A-High Temperature (HT) FRTW
- California Department of Forestry and Fire Protection CSFM BML Listings for D-Blaze Lumber
- Class FRT lumber
- 50-year warranty

(All are subject to revision, re-examination)



Product Detail

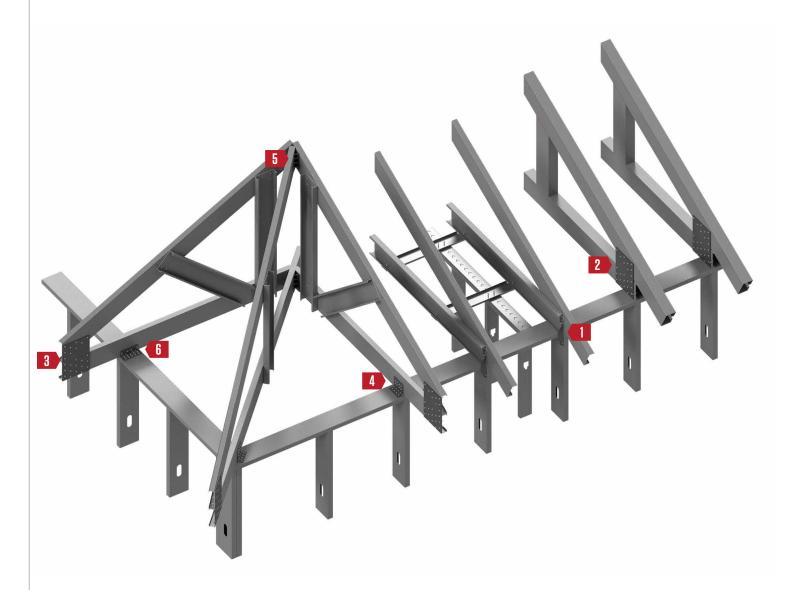







5 Skewable Angle page 128-129





GP-Series™ Unpunched
Gusset Plate
pages 166-167





B EasyClip D&T-Series™
Anchor Clips
pages 94-95




















Seismic and Hurricane Ties

Attach and secures trusses and rafters to the building structure.

Clark Dietrich seismic and hurricane ties are designed to provide wind and seismic resistance for trusses and rafters. Quick and efficient, these versatile connectors can also be used for general tie-down purposes, strong back attachments and as all-purpose ties where one member crosses another. The HC2 and HC2A seismic and hurricane ties are formed from a flat plate into an A-shaped section. The plate has a right-angle bend along its longitudinal axis to permit straddling a top plate. The HC2.5 and HC3 are twisted strap ties that are used to attach a rafter to the side of the top plate.

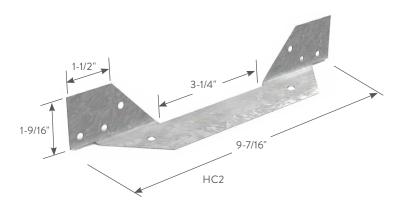

ALTERNATIVE PRODUCTS

EasyClip[™] T-Series[™] Tall Anchor Clip EasyClip E-Series[™] Support Clip


MATERIAL SPECIFICATIONS


Gauge: 18 gauge (43mils)

Design Thickness: 0.0451 inches

Coating: G90

Yield Strength: 50ksi ASTM: A653/A653M

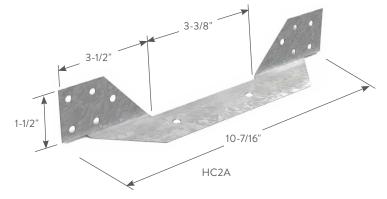

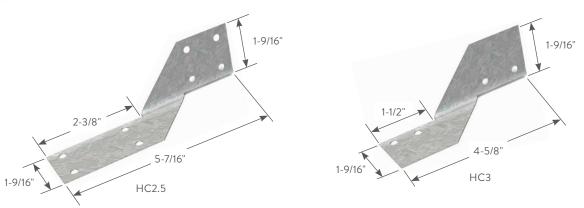

ClarkDietrich Seismic and Hurricane Ties Packaging Pcs./Carton Size (in) Product code Design thickness (in) Mils (Gauge) HC2 0.0451 43mils (18ga) 1-9/16 x 9-7/16 x 1-9/16 100 43mils (18ga) HC2A 0.0451 1-1/2 x 10-7/16 x 1-1/2 100 HC2.5 43mils (18ga) 0.0451 1-9/16 x 5-7/16 x 1-9/16 100

0.0451

НС3

43mils (18ga)

1-9/16 x 4-5/8 x 1-9/16

100


HC2 OR HC2A INSTALLATION

Place the tie so one end fits flush against the roof framing member and the other fits flush against the web of the wall stud. Attach the tie to the side of the rafter at the top and to the sides of the stud immediately below the top plate at the bottom. Fill all prepunched holes with a minimum of #10 self-drilling screws.


HC2.5 OR HC3 INSTALLATION

Place the tie so the top fits securely against the roof framing member and the bottom fits securely against the top plate and flange of the wall stud. Attach the tie to the rafter at the top and to the sides of the top plate and stud immediately below. Fill all prepunched holes with a minimum #10 self-drilling screws.

Reference section R 603.8.3.2 of the International Residential Code (IRC) or the engineer of records specification.

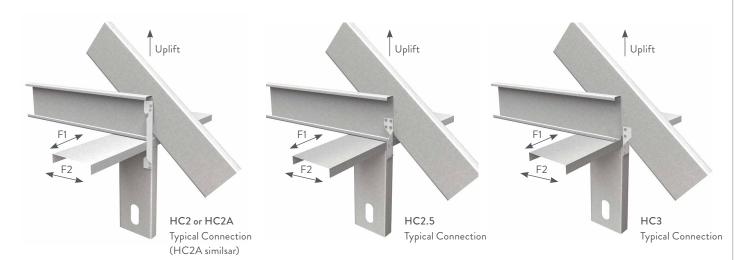

Typical Construction Details
Visit our CAD Library at clarkdietrich.com
to view or download construction details in
.dwg, .dxf, and .pdf formats.



ClarkDietrich Seismic and Hurricane Ties

		Fasteners		6. 1.1.1	VC 11.6	Max. Allowable Loads			
Product code	To rafters / truss	To some smooth	To stud	Stud thickness Mils (Gauge)	Yield Stregth (ksi)	Uplift	Late	eral	
	To rarters / truss	To top track	10 Stud	Milis (Gauge)	(K3I)	Орин	F1	F2	
				33mils (20ga)	33ksi	405	_	_	
	3 – #10	_	3 - #10	43mils (18ga)	33ksi	445	_	_	
HC2				54mils (16ga)	50ksi	465	_	_	
псг	3 - #10 1 - #10		33mils (20ga)	33ksi	405	90	120		
		1 – #10	3 - #10	43mils (18ga)	33ksi	445	110	170	
				54mils (16ga)	50ksi	465	110	225	
			33mils (20ga)	33ksi	405	90	120		
HC2A	3 – #10	1 – #10	3 - #10	43mils (18ga)	33ksi	445	110	170	
				54mils (16ga)	50ksi	465	110	225	
				33mils (20ga)	33ksi	410	90	120	
HC2.5	4 - #10	_	4 - #10	43mils (18ga)	33ksi	475	140	170	
				54mils (16ga)	50ksi	475	140	225	
			-	33mils (20ga)	33ksi	340	80	80	
HC3	2 – #10	2 - #10*		43mils (18ga)	33ksi	465	110	140	
				54mils (16ga)	50ksi	475	110	195	

- 1 Loads have been increased for wind or earthquake loading.
- * Fasteners to top track must also penetrate.

GP-Series™ Unpunched Gusset Plate

Use in conjunction with X-bracing in load-bearing shearwall assemblies to resist racking under wind and seismic loads.

Gusset plates and diagonal tension strapping components are used in combination to provide shearwall (racking restraint) for light-gauge, load-bearing framing under wind and seismic loads. Resisting uplift and shear forces, they are normally installed on both sides of the wall directly over the framing members.

CAUTION: Racking loads are first transferred to the roof or floor decking and then to the shearwalls (X-bracing). The X-bracing then relies on a proper anchorage to the foundation to resist uplift and shear forces. In order for the system to function properly, the load path from the roof or floor deck to the shearwalls to the foundation must be complete. This normally requires additional bracing, blocking, track and rim splices, drag struts, uplift anchors and heavy-duty foundations.

PRODUCT DIMENSIONS

6" x 6"

6" x 12"

12" x 12"

Custom sizes, shapes, and gauges available.

MATERIAL SPECIFICATIONS

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Gauge: 12 gauge (97mils)


Design Thickness: 0.1017 inches

Coating: G90

Yield Strength: 50ksi **ASTM**: A653/A653M

INSTALLATION

Straps are positioned diagonally from the bottom track to the top track. In order to resist load in each direction, an X-configuration should be used. At a minimum, double studs are positioned at ends of the X-brace to serve as compression studs. Straps are either attached directly to the compression studs or are attached via gusset plates. Compression studs must be anchored to the foundation, normally with uplift anchors. For multi-story construction, the uplift loads can be extremely high. It is recommended that the services of a qualified professional engineer be used to verify the applicability of the system selected.

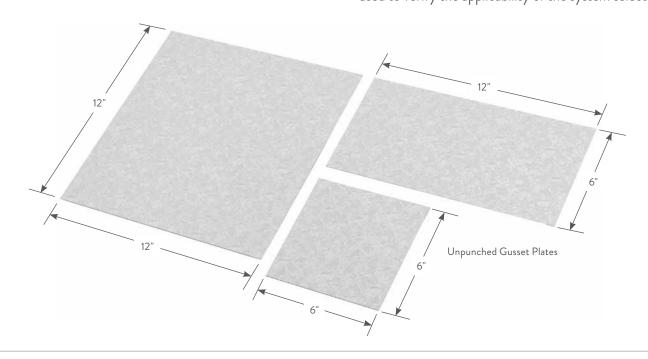


Unpunched Gusset Plates for ShearWall Bracing										
	Thi	ckness								
Product code	Mils (Gauge)	Design thickness (in)	Plate size (in)	Packaging Pcs.						
		0.0566	6 x 6	25						
	54mils (16ga)		6 x 12	25						
GP			12 x 12	25						
GP			6 x 6	25						
	97mils (12ga)	0.1017	6 x 12	25						
			12 x 12	25						






GP-Series unpunched gusset plates are also used to facilitate connections between chord members for in-plane framing.

TYPICAL CONSTRUCTION DETAILS





 $Visit\ our\ CAD\ Library\ at\ clark dietrich.com\ to\ view\ or\ download\ construction\ details\ in\ .dwg,\ .dxf,\ and\ .pdf\ formats.$

G-Series™ Punched Gusset Plate

A multipurpose connector used for a variety of framing connections.

G-Series™ punched gusset plates come with multi-hole shapes for proper fastening to achieve desired performance. Used in a variety of framing connections—including roof framing, header framing and shearwall applications—the gusset plates eliminate angled cutting. Prepunched for easier, faster attachments, the gusset plates adapt to multiple configurations and varying construction tolerances.

CAUTION: Racking loads are first transferred to the roof or floor decking and then to the shearwalls (X-bracing). The X-bracing then relies on a proper anchorage to the foundation to resist uplift and shear forces. In order for the system to function properly, the load path from the roof or floor deck to the shearwalls to the foundation must be complete. This normally requires additional bracing, blocking, track and rim splices, drag struts, uplift anchors and heavy-duty foundations.

PRODUCT DIMENSIONS

6" x 8-1/2"

MATERIAL SPECIFICATIONS

Gauge: 18 gauge (43mils)

Design Thickness: 0.0451 inches

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Coating: G90

Yield Strength: 33ksi for 18 gauge


50ksi for 14 & 16 gauge

ASTM: A653/A653M

INSTALLATION

Straps are positioned diagonally from the bottom track to the top track. In order to resist load in each direction, an X-configuration should be used. At a minimum, double studs are positioned at ends of the X-brace to serve as compression studs. Straps are either attached directly to the compression studs or are attached via gusset plates. Compression studs must be anchored to the foundation, normally with Clark Dietrich holdowns. For multi-story construction, the uplift loads can be extremely high. It is recommended that the services of a qualified professional engineer be used to verify the applicability of the system selected.


G-Serie					
Product code		kness	Size	Packaging Pcs./Bucket	
	Mils (Gauge)	Design thickness (in)	(in)	Pcs./Bucket	
G436	43mils (18ga)	0.0451	6 x 8-1/2	50	
G546	54mils (16ga)	0.0566	6 x 8-1/2	50	
G686	68mils (14ga)	0.0713	6 x 8-1/2	50	








TYPICAL CONSTRUCTION DETAILS





Visit our CAD Library at clarkdietrich.com to view or download construction details in .dwg, .dxf, and .pdf formats.

Product Detail

1 HDSC Header Bracket for RedHeader PRO™ pages 172-175





4 ClarkDietrich Sound Clip page 178-183





2 Aluminum Burn Clip page 176





5 Header Cripple Stud Clip page 184





3 Grommets for Stud Knockouts page 177





6 Metal Furring Channel Clip page 185





7 Panel Lift Clip pages 186-187





8 Commercial Strapping pages 188-189





8 Box Header Clip pages 190-191





HDSC Header Bracket

For use with the RedHeader PRO™ and HDS® Rough Opening Systems.

The HDSC Header Bracket is the perfect complement to the RedHeader PRO™ Framing system and HDS® Framing System. This simple, yet innovative header bracket turns curtain-wall header installation from a two-person job into a one-person job. This unique, pre-punched clip also eliminates surface head fastener buildup that can create finishing challenges. The HDSC is sized to be used with either 3" or 3-1/2" flanged member.

PRODUCT DIMENSIONS

3-1/2" x 3-1/16" x 2"	3-1/2" x 3-9/16" x 2"
3-7/8" x 3-1/16" x 2"	3-7/8" x 3-9/16" x 2"
5-7/8" x 3-1/16" x 2"	5-7/8" x 3-9/16" x 2"
7-7/8" x 3-1/16" x 2"	7-7/8" x 3-9/16" x 2"

MATERIAL SPECIFICATIONS

Gauge: 20 gauge (33mils)

Design Thickness: 0.0346 inches

Yield Strength: 33ksi

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches

Yield Strength: 50ksi


Gauge: 12 gauge (97mils)

Design Thickness: 0.1017 inches

Yield Strength: 50ksi

Coating: G90

ASTM: A653/A653M, A1003/A1003M










HDSC 33mils (20	ga) Header	· Brackets (3"	& 3-1/2" Flange)

	Bracket	t Specs	Framing M	ember Specs						
Product Code	Б	11.5.15	Thickness	Yield	Designed to Support					
Floudet Code	Depth (D)	Height (H)	Mils (Gauge)	Strength, Fy (ksi)	Designed to Support					
350HDSC300-33	3-1/2"	3"	33 (20)	33	3-5/8" RedHeader or HDS with 3" Flange					
350HDSC350-33	5-1/2	3-1/2"	33 (20)	33	3-5/8" RedHeader with 3-1/2" Flange					
387HDSC300-33	3-7/8"	3"	33 (20)	33	4" RedHeader or HDS with 3" Flange					
387HDSC350-33	5-776	3-1/2"	33 (20)	33 (20)	33 (20) 33	4" RedHeader with 3-1/2" Flange				
587HDSC300-33	5-7/8"	3"	22 (20)	22	6" RedHeader or HDS with 3" Flange					
587HDSC350-33	5-776	3-1/2"	33 (20)	33 (20)	33 (20)	33 (20)	33 (20)	33 (20)	33	6" RedHeader with 3-1/2" Flange
787HDSC300-33	7 7/0"	3"	33 (20)	33	8" RedHeader or HDS with 3" Flange					
787HDSC350-33	7-7/8"	3-1/2"	33 (20)	55	8" RedHeader with 3-1/2" Flange					





Allowable Loads (lbs) for 3" & 3-1/2" Flange Header Systems

					6		7										
Bracket Specs Framing Member Specs		Fast	eners	Capacities (lbs)													
Product Code			Thickness	Yield			F	1 Load (Later	al)	F2	Load (Verti	cal)					
Troduct Code	Depth (D)	Height (H)	Mils (Gauge)	Strength, Fy (ksi)	Jamb	Header	Nominal (lbs)	ASD Load (lbs)	LRFD Load (lbs)	Nominal (lbs)	ASD Load (lbs)	LRFD Load (lbs)					
			33 (20)	33			1200	615	985	895	190	190					
			43 (18)	33			1435	735	1180	1555	245	245					
350HDSC300-33	3-1/2"	3"	54 (16)	50	4 x #10	4 x #10	2000	1025	1595	2540	300	300					
			68 (14)	50			2290	1060	1595	1435	425	425					
			97 (12)	50			2875	1060	1595	1750	450	450					
			54 (16)	50			2095	1060	1595	1020	380	380					
350HDSC350-33	3-1/2"	3-1/2"	68 (14)	50	4 x #10	4 x #10	2460	1060	1595	1280	395	395					
			97 (12)	50			2675	1060	1595	1765	460	460					
			33 (20)	33			1090	560	895	1110	220	220					
			43 (18)	33			1420	730	1165	1585	280	280					
387HDSC300-33	3-7/8"	3"	54 (16)	50	4 x #10	4 x #10	2085	1060	1595	2130	310	310					
			68 (14)	50			2290	1060	1595	1435	425	425					
			97 (12)	50			2875	1060	1595	1750	450	450					
			54 (16)	50	4 x #10		2095	1060	1595	1020	380	380					
387HDSC350-33	3-7/8"	3-1/2"	68 (14)	50		10 4 x #10	2460	1060	1595	1280	395	395					
			97 (12)	50									2560	1060	1595	1935	455
			33 (20)	33	33 33		1150	590	945	1050	205	205					
			43 (18)	33			1410	720	1155	1765	320	320					
587HDSC300-33	5-7/8"	3"	54 (16)	50	4 x #10	4 x #10	2085	1060	1595	2130	320	320					
			68 (14)	50		50		2290	1060	1595	1435	425	425				
			97 (12)	50			2875	1060	1595	1750	450	450					
			54 (16)	50			2095	1060	1595	1020	380	380					
587HDSC350-33	5-7/8"	3-1/2"	68 (14)	50	4 x #10	4 x #10	2460	1060	1595	1280	395	395					
			97 (12)	50			2560	1060	1595	1935	455	455					
			33 (20)	33			1210	620	995	990	190	190					
			43 (18)	33			1540	790	1265	1630	270	270					
787HDSC300-33	7-7/8"	3"	54 (16)	50	4 x #10	4 x #10	2045	1050	1595	2130	310	310					
			68 (14)	50			2195	1060	1595	1395	385	385					
			97 (12)	50			2875	1060	1595	1750	450	450					
			54 (16)	50			2030	1040	1595	1075	320	320					
787HDSC350-33	7-7/8"	3-1/2"	68 (14)	50	4 x #10	4 x #10	2460	1060	1595	1280	395	395					
			97 (12)	50			2450	1060	1595	2105	455	455					

- 1 Listed Capacities were derived from calculations and structural tests in accordance with provisions of AISI S100 and ICC-ES AC261.
- 2 The safety factor for ASD loads and resistance factor for LRFD loads are calculated in accordance with Chapter K.
- 3 The capacity of a given HDSC connection is the minimum of the corresponding jamb and the header values. For example, for a 3-1/2" HDSC-33 bracket (3" Flange) used with a 54mils (16ga) 50 ksi jamb and a 97mils (12ga) 50 ksi header, the F2 allowable design load shall be the capacity corresponding to framing member with lesser thickness i.e, 16ga member. Thus, the ASD capacity is 300 lbs.
- 4 #10-16 HWH Screws by ITW Buildex were used to attach Brackets to Jamb and Header. The screws shall have a minimum shear capacity of 1400 lbs and minimum tension capacity of 1158 lbs. Evidence shall be provided to the building official for approval that defines the fasteners meet the performance requirements of this report, ASTM C1513 and are for use with cold-formed steel.
- 5 For simultaneous F1 and F2 loading, use the following interaction equation: (f1/F1)²+(f2/F2)² ≤ 1.0 Where f1 and f2 are the applied loads and F1 and F2 are the appropriate allowable loads.
- 6 It is the responsibility of the design professional to detail the project drawings for proper HDSC bracket installation.

HDSC Header Bracket



HDSC 68mils (14ga) Header Brackets (3" & 3-1/2" Flange)

	Bracke	t Specs	Framing Member Specs			
Product Code	Depth (D)	Height (H)	Mils (Gauge)	Yield Strength, Fy (ksi)	Designed to Support	
350HDSC300-68	3-1/2"	3"	68 (14)	50	3-5/8" RedHeader or HDS with 3" Flange	
350HDSC350-68	3-1/2	3-1/2"	08 (14)	50	3-5/8" RedHeader with 3-1/2" Flange	
387HDSC300-68	3-7/8"	3"	68 (14)	50	4" RedHeader or HDS with 3" Flange	
387HDSC350-68	3-770	3-1/2"	00 (14)	00 (14)	30	4" RedHeader with 3-1/2" Flange
587HDSC300-68	5-7/8"	3"	68 (14)	50	6" RedHeader or HDS with 3" Flange	
587HDSC350-68	5-776	3-1/2"	00 (14)	50	6" RedHeader with 3-1/2" Flange	
787HDSC300-68	7-7/8"	3"	60 (14)	50	8" RedHeader or HDS with 3" Flange	
787HDSC350-68	/-//8	3-1/2"	68 (14)	30	8" RedHeader with 3-1/2" Flange	

All material G90. Sold in pairs.



Allowable Loads (lbs) for 3" & 3-1/2" Flange Header Systems

					•		/					
	Bracket Specs		Framing Member Specs		Fasteners		Capacities (lbs)					
Product Code	Depth (D)	Height (H)	Thickness	Yield		F1 Load (Lateral)			F2 Load (Vertical)			
Product Code			Mils (Gauge)	Strength, Fy (ksi)	Jamb	Header	Nominal (lbs)	ASD Load (lbs)	LRFD Load (lbs)	Nominal (lbs)	ASD Load (lbs)	LRFD Load (lbs)
	3-1/2"	3"	33 (20)	33	4 x #10	4 x #10	1435	705	1060	880	300	480
			43 (18)	33			2365	1050	1575	1130	390	620
350HDSC300-68			54 (16)	50			3185	1095	1755	2380	820	940
			68 (14)	50			3415	1175	1880	2920	1005	1385
			97 (12)	50			3940	1355	2170	3645	1255	1875
		3-1/2"	54 (16)	50	4 x #10	4 x #10	2975	1025	1640	2150	740	1145
350HDSC350-68	3-1/2"		68 (14)	50			3375	1160	1855	2925	1005	1555
			97 (12)	50			3810	1310	2100	3555	1225	1730
	3-7/8"		33 (20)	33	4 x #10	4 x #10	1405	705	1060	885	305	485
			43 (18)	33			2210	1050	1575	1225	420	670
387HDSC300-68		3"	54 (16)	50			3185	1095	1755	2380	820	940
			68 (14)	50			3475	1195	1910	3130	1075	1450
			97 (12)	50			4000	1375	2200	3815	1310	1700
	3-7/8"	3-1/2"	54 (16)	50	4 x #10	4 x #10	3070	1055	1690	2300	790	1145
387HDSC350-68			68 (14)	50			3395	1165	1870	3065	1055	1490
			97 (12)	50			4365	1500	2400	3825	1315	1850
	5-7/8"	3"	33 (20)	33	4 x #10	4 x #10	1370	700	1060	895	305	490
			43 (18)	33			2055	1050	1575	1315	450	725
587HDSC300-68			54 (16)	50			3265	1120	1795	2460	845	1045
			68 (14)	50			3535	1215	1945	3345	1150	1515
			97 (12)	50			4000	1375	2200	3815	1310	1700
	5-7/8"	3-1/2"	54 (16)	50	4 x #10	4 x #10	3070	1055	1690	2300	790	1145
587HDSC350-68			68 (14)	50			3415	1175	1880	3210	1105	1430
			97 (12)	50			4110	1415	2265	3955	1360	1820
787HDSC300-68	7-7/8"	3"	33 (20)	33	4 x #10	4 x #10	1370	700	1060	895	305	490
			43 (18)	33			2115	1050	1575	1245	425	670
			54 (16)	50			3340	1150	1840	2535	870	1145
			68 (14)	50			3440	1180	1895	3425	1180	1575
			97 (12)	50			4060	1395	2235	3985	1370	1525
787HDSC350-68	7-7/8"	3-1/2"	54 (16)	50	4 x #10	4 x #10	3165	1090	1745	2455	845	1145
			68 (14)	50			3420	1175	1880	3360	1155	1370
			97 (12)	50			3860	1330	2125	4090	1405	1785

Notes

Listed Capacities were derived from calculations and structural tests in accordance with provisions of AISI S100 and ICC-ES AC261.


- 2 The safety factor for ASD loads and resistance factor for LRFD loads are calculated in accordance with Chapter K.
- 3 The capacity of a given HDSC connection is the minimum of the corresponding jamb and the header values. For example, for a 3-1/2" HDSC-68 bracket (3" Flange) used with a 54mils (16ga) 50 ksi jamb and a 97mils (12ga) 50 ksi header, the F2 allowable design load shall be the capacity corresponding to framing member with lesser thickness i.e, 16ga member. Thus, the ASD capacity is 820 lbs.
- 4 #10-16 HWH Screws by ITW Buildex were used to attach Brackets to Jamb and Header. The screws shall have a minimum shear capacity of 1400 lbs and minimum tension capacity of 1158 lbs. Evidence shall be provided to the building official for approval that defines the fasteners meet the performance requirements of this report, ASTM C1513 and are for use with cold-formed steel.
- 5 For simultaneous F1 and F2 loading, use the following interaction equation: (f1/F1)² + (f2/F2)² ≤ 1.0 Where f1 and f2 are the applied loads and F1 and F2 are the appropriate allowable loads.
- 6 It is the responsibility of the design professional to detail the project drawings for proper HDSC bracket installation.



HDSC 97mils (12ga) Header Brackets (3" & 3-1/2" Flange)

	Bracke	t Specs	Framing M	ember Specs			
Product Code	Depth (D)	Height (H)	Mils (Gauge)	Yield Strength, Fy (ksi)	Designed to Support		
350HDSC300-97	2.4/2"	3"	97 (12)	50	3-5/8" RedHeader or HDS with 3" Flange		
350HDSC350-97	3-1/2"	3-1/2"	97 (12)	50	3-5/8" RedHeader with 3-1/2" Flange		
387HDSC300-97	3-7/8"	3"	07 (12)	50	4" RedHeader or HDS with 3" Flange		
387HDSC350-97	3-770	3-1/2"	97 (12)		4" RedHeader with 3-1/2" Flange		
587HDSC300-97	F 7/0"	3"	97 (12)	50	6" RedHeader or HDS with 3" Flange		
587HDSC350-97	5-7/8"	3-1/2"	97 (12)	50	6" RedHeader with 3-1/2" Flange		
787HDSC300-97	7 7/0"	3"	07 (12)	50	8" RedHeader or HDS with 3" Flange		
787HDSC350-97	7-7/8"	3-1/2"	97 (12)	50	8" RedHeader with 3-1/2" Flange		





Allowable Loads (lbs) for 3" & 3-1/2" Flange Header Systems

	Bracket Specs		Framing Member Specs		Fasteners		Capacities (lbs)					
Product Code	Depth (D)	Height (H)	Thickness	Yield		F1 Load (Lateral)			F2 Load (Vertical)			
Froduct Code			Mils (Gauge)	Strength, Fy (ksi)	Jamb	Header	Nominal (lbs)	ASD Load (lbs)	LRFD Load (lbs)	Nominal (lbs)	ASD Load (lbs)	LRFD Load (lbs)
	3-1/2"	3"	33 (20)	33	4 x #12	4 x #12	1435	735	1130	880	300	495
			43 (18)	33			2490	1120	1680	1375	470	865
350HDSC300-97			54 (16)	50			4025	1385	2215	2195	755	1410
			68 (14)	50			4340	1490	2390	3465	1190	2000
			97 (12)	50			6075	2090	3345	5610	1930	2380
	3-1/2"	3-1/2"	54 (16)	50	4 x #12	4 x #12	4080	1400	2245	2145	735	1545
350HDSC350-97			68 (14)	50			4265	1465	2350	3575	1230	2090
			97 (12)	50			6005	2065	3305	5385	1850	2405
	3-7/8"	3"	33 (20)	33	4 x #12	4 x #12	1405	720	1130	885	305	550
			43 (18)	33			2490	1120	1680	1375	470	865
387HDSC300-97			54 (16)	50			4105	1410	2260	2405	825	1455
			68 (14)	50			4105	1410	2260	3360	1155	1530
			97 (12)	50			6000	2065	3305	5840	2010	2560
	3-7/8"	3-1/2"	54 (16)	50	4 x #12	4 x #12	3975	1365	2185	2230	765	1620
387HDSC350-97			68 (14)	50			4195	1445	2310	3630	1250	2080
			97 (12)	50			6185	2130	3405	5500	1890	2455
	5-7/8"	3"	33 (20)	33	4 x #12	4 x #12	1370	700	1125	895	305	610
			43 (18)	33			2345	1120	1680	1400	480	820
587HDSC300-97			54 (16)	50			4340	1475	2390	2615	900	1500
			68 (14)	50			4340	1490	2390	3465	1190	2000
			97 (12)	50			5930	2040	3265	6065	2085	2740
	5-7/8"	3-1/2"	54 (16)	50	4 x #12	4 x #12	3870	1330	2130	2310	795	1690
587HDSC350-97			68 (14)	50			4195	1445	2310	3630	1250	2080
			97 (12)	50			6060	2085	3335	5840	2010	2400
787HDSC300-97	7-7/8"	3"	33 (20)	33	4 x #12	4 x #12	1370	700	1125	895	305	610
			43 (18)	33			2200	1120	1680	1420	485	770
			54 (16)	50			4125	1420	2270	2945	1015	1485
			68 (14)	50			4125	1420	2270	3685	1265	2070
			97 (12)	50			5770	1985	3175	6085	2090	2710
787HDSC350-97	7-7/8"	3-1/2"	54 (16)	50	4 x #12	4 x #12	4070	1400	2240	2625	905	1505
			68 (14)	50			4125	1420	2270	3685	1265	2070
			97 (12)	50			5935	2040	3265	6180	2125	2350

- 1 Listed Capacities were derived from calculations and structural tests in accordance with provisions of AISI S100 and ICC-ES AC261.
- 2 The safety factor for ASD loads and resistance factor for LRFD loads are calculated in accordance with Chapter K.
- 3 The capacity of a given HDSC connection is the minimum of the corresponding jamb and the header values. For example, for a 3-1/2" HDSC-97 bracket (3" Flange) used with a 54mils (16ga) 50 ksi jamb and a 97mils (12ga) 50 ksi header, the F2 allowable design load shall be the capacity corresponding to framing member with lesser thickness i.e, 16ga member. Thus, the ASD capacity is 755 lbs.
- 4 #12-14 HWH Screws by ITW Buildex were used to attach Brackets to Jamb and Header. The screws shall have a minimum shear capacity of 2000 lbs and minimum tension capacity of 2325 lbs. Evidence shall be provided to the building official for approval that defines the fasteners meet the performance requirements of this report, ASTM C1513 and are for use with cold-formed steel.
- 5 For simultaneous F1 and F2 loading, use the following interaction equation: (f1/F1)²+(f2/F2)² ≤ 1.0 Where f1 and f2 are the applied loads and F1 and F2 are the appropriate allowable loads.
- 6 It is the responsibility of the design professional to detail the project drawings for proper HDSC bracket installation.

Aluminum Burn Clip

Melting away under intense heat, clips allow a fire-damaged structure to collapse while keeping the firewall barrier in place, protecting adjacent units.

ClarkDietrich aluminum burn clips are used as part of the H-stud area separation wall assembly and are designed to melt and break away when exposed to fire. The clips are used to hold the area separation wall assembly in place at the floor roof and truss line between adjacent units.

Should a fire break out in one unit, the aluminum burn clips on the fire-ridden side of the area separation wall will melt, allowing the wall structure for that side to collapse. Without pulling the area separation wall down, the burn clips on the non-fire side will remain intact, and hold the area separation wall in place as a barrier to contain the fire within the unit of origin.

PRODUCT DIMENSIONS

2" x 2" x 2-1/2"

2" x 2" x 3"

2" x 2" x 3-1/2"

2" x 2" x 4"


2" x 2" x 4-1/2"

MATERIAL SPECIFICATIONS

All burn clips are manufactured using 5052 H32 aluminum. Standard product manufactured with .050 material. Extra-heavy duty product (AB63) manufactured with .063 material is available on request.

INSTALLATION

Attach an aluminum burn clip to the completed area separation wall assembly. One clip should be located at each H-stud on both sides of the wall. Attach the aluminum burn clip to the H-stud with screws, not nails. Attach to the adjacent framing with Type-W or Type-S screws.

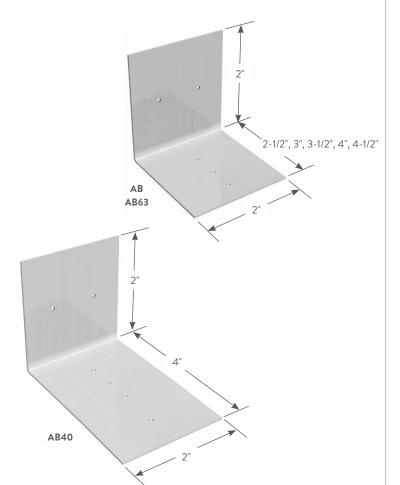

Aluminum Burn Clips (AB)									
Product code	Thickness (in)	Size (in)	Packaging Pcs./Bucket						
AB	0.050	2 x 2 x 2-1/2	500						
AB63	0.063	2 x 2 x 2-1/2	500						
AB30	0.063	2 x 2 x 3	250						
AB35	0.063	2 x 2 x 3-1/2	250						


0.063

0.063

*AB40-For use with 3-hour Design Assembly based on GA file No. ASW 2600.

2 x 2 x 4

2 x 2 x 4-1/2



AB40*

250

Grommet for Stud Knockouts

Protect and isolate electrical wiring and plumbing from contacting metal.

Grommets snap easily into stud knockouts and are used to protect electrical wiring and plumbing lines from contacting metal. They also help to prevent and eliminate pipe rattle. Grommets are commonly used in residential construction when metal conduit is not required by building code.

INSTALLATION

Install grommets in all stud knockouts where wiring and plumbing lines will be inserted. Use the snap-in bushing grommet for 1-5/8" and 2-1/2" wall studs and the standard grommet for all wall studs 3-1/2" and wider.

Install the snap-in bushing by pressing the bushing into the stud knockout. Make sure to engage the bushing lips to secure into place.

Install the standard grommet by first opening the grommet as illustrated above. Insert one side of the grommet through the knockout. Snap the grommet together so it engages with the metal sandwiched between the two plastic sides.

Grommet (GROM)				
Product code	Size (in)	Description	Pcs./Carton	
CDOM	3/4	For 1-5/8" and 2-1/2" studs	100	
GROM	1-1/2	For 3-1/2" and wider studs	100	





Snap-In Bushing



Grommet for 3-1/2" and Wider Studs

ClarkDietrich Sound Clip™

Sound isolation and dampening clip.

The Clark Dietrich Sound Clip™ is used in conjunction with 18 mils (25ga) 7/8" deep drywall furring channel. It is used to fasten gypsum wallboard in various wall and floor-ceiling applications, while simultaneously providing acoustical separation. This significantly reduces the amount of airborne sound filtering from room to room. The Clark Dietrich Sound Clip adds notable STC points to most assemblies while reducing sound transfer.

- Ideal for use in multi-familsy dwelling, hotels, theaters and hospitals
- Used in conjunction with 7/8" 25 ga Furring Channel with a total standoff from stud of 1-5/8"
- UL fire rated for most common assemblies
- Complies to UL 263 test standards.
- Max. spacing 48" o.c. (laterally) x 24" o.c. (vertically)
- · Maximum acoustical design load is 36 lbs.
- Sound testing for Type X & Type C Boards

PRODUCT DIMENSIONS


3" x 1-1/4" (Clip only)


MATERIAL SPECIFICATIONS

Gauge: 18 gauge (43mils)

Design Thickness: 0.0451 inches

Yield Strength: 33ksi Coating: CP60





ClarkDietric			
Product code	Mils (Gauge)	Size (in)	Pcs./Bucket
CDSC	43mils (18ga)	3 x 1-1/4	100

SOUND AND UL DESIGN:

- Complies to UL 263 test standards. See full list of UL® design assemblies in UL R19331.
- Wall Sound Assemblies are certified by Western Electro-Acoustical Laboratories.
- Floor Sound Assemblies are certified by Intertek Building & Construction (B&C).
- NVLAP Accredited for ASTM E90 & E413, ISO Certified

CDSC STC SOUND ASSEMBLIES ON METAL STUD FRAMING

Fire Rating	UL Assembly	Wall Framing	Stud Spacing	Wall Board (Side1/Side2)	Insulation	STC Rating	OITC Rating	Test Report
		3-5/8" ProSTUD 20 33mils	24" o.c.	(1) layer / (1) layer 5/8" Type C	R-19	60		TL18-291
		3-5/8" ProSTUD 20 33mils	24" o.c.	(1) layer / (2) layers 5/8" Type C	R-19	62		TL18-292
		3-5/8" ProSTUD 20 33mils	24" o.c.	(2) layers / (2) layers 5/8" Type C	R-19	63		TL18-293
		3-5/8" ProSTUD 25 15mils	16" o.c.	(1) layer / (1) layer 5/8" Type X	R-11	56		TL18-199
		3-5/8" ProSTUD 25 15mils	16" o.c.	(1) layer / (2) layers 5/8" Type X	R-11	60		TL18-197
		3-5/8" ProSTUD 25 15mils	16" o.c.	(2) layers / (2) layers 5/8" Type X	R-11	62		TL18-194
2 Hr	U411	2-1/2" ProSTUD 25 15mils	24" o.c.	(2) layers / (2) layers 5/8" Type X	R-13	62	48	L3173.08-113-11-R0
3/4 Hr	U423	3-1/2" Structural Stud 33mils	24" o.c.	(1) layer / (1) layer 1/2" Type C	R-19	53	37	L3173.10-113-11-R0
1 Hr	U423	3-1/2" Structural Stud 33mils	24" o.c.	(1) layer / (1) layer 1/2" Type X	R-19	55	38	L3173.12-113-11-R0
1-1/2 Hr	U423	3-1/2" Structural Stud 33mils	24" o.c.	(2) layers / (2) layers 1/2" Type C	R-19	62	48	L3173.11-113-11-R0
2 Hr	U423	3-1/2" Structural Stud 33mils	24" o.c.	(2) layers / (2) layers 5/8" Type X	R-19	63	50	L3173.13-113-11-R0
1 Hr	U465	3-5/8" ProSTUD 20 18mils	24" o.c.	(1) layer / (1) layer 5/8" Type X	None	45	29	L3173.03-113-11-R0
1 Hr	U465	3-5/8" ProSTUD 20 18mils	24" o.c.	(1) layer / (1) layer 5/8" Type X	Mineral Wool	53	36	L3173.04-113-11-R0
1 Hr	U465	3-5/8" ProSTUD 20 18mils	24" o.c.	(1) layer / (1) layer 5/8" Type X	R-13	53	37	L3173.05-113-11-R0
1 Hr	U493	(2) 2-1/2" ProSTUD 25 15 mils - ChaseWall	24" o.c.	(1) layer / (1) layer 5/8" Type X	R-13 Both Sides	60	44	L3173.06-113-11-R0
2 Hr	U493	(2) 2-1/2" ProSTUD 25 15 mils - ChaseWall	24" o.c.	(2) layers / (2) layers 5/8" Type X	R-13 Both Sides	67	53	L3173.07-113-11-R0
1 Hr	V438	2-1/2" ProSTUD 25 15 mils	24" o.c.	(1) layer / (1) layer 1/2" Type C	R-13	49	34	L3173.09-113-11-R0
2 Hr	V438	1-5/8" ProSTUD 25 15 mils	24" o.c.	(2) layers / (2) layers 1/2" Type C	2-3/4" Fiberglass	59	42	L3173.14-113-11-R0
3 Hr	V438	1-5/8" ProSTUD 25 15 mils	24" o.c.	(3) layers / (3) layers 1/2" Type C	2-3/4" Fiberglass	63	49	L3173.15-113-11-R0
4 Hr	V438	1-5/8" ProSTUD 25 15 mils	24" o.c.	(4) layers / (4) layers 1/2" Type C	2-3/4" Fiberglass	66	53	L3173.16-113-11-R0

Wall Tests: The test was performed in accordance with ASTM E 90-09 (2016), Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and ASTM E2235-04 (2012), Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods.

Floor/Ceiling Tests: Available from Clark Dietrich Technical Services.

ClarkDietrich Sound Clip™

CDSC STC SOUND ASSEMBLIES ON 2x4 WOOD STUDS

Fire Rating	UL Assembly	Wall Framing	Stud Spacing	Wall Board (Side1/Side2)	Insulation	STC Rating	OITC Rating	Test Report
		2x4 Wood Studs	16" o.c.	(1) layer / (1) layer 5/8" Type X	R-19	53		TL18-201
		2x4 Wood Studs	16" o.c.	(1) layer / (1) layer 5/8" Type C	R-19	60		TL18-288
		2x4 Wood Studs	16" o.c.	(1) layer / (2) layers 5/8" Type X	R-19	57		TL18-204
		2x4 Wood Studs	16" o.c.	(1) layer / (2) layers 5/8" Type C	R-19	61		TL18-289
		2x4 Wood Studs	16" o.c.	(2) layers / (2) layers 5/8" Type X	R-19	61		TL18-205
		2x4 Wood Studs	16" o.c.	(2) layers / (2) layers 5/8" Type C	R-19	62		TL18-290
2 Hr	U301	2x4 Wood Studs	16" o.c.	(2) layers / (2) layers 5/8" Type X	R-13	60	47	L3173.01-113-11-R0
1 Hr	U309	2x4 Wood Studs	24" o.c.	(1) layer / (1) layer 5/8" Type X	R-19	53	37	L3173.17-113-11-R0
1 Hr	U311	2x4 Wood Studs	24" o.c.	(1) layer / (1) layer 5/8" Type C	R-19	55	39	L3173.18-113-11-R0
1 Hr	U340	2x4 Wood Studs - Chase Wall	12" o.c. Staggered	(1) layer / (1) layer 5/8" Type X	R-19	57	43	L3173.21-113-11-R0
1 Hr	U341	2x4 Wood Studs - Chase Wall	24" o.c.	(1) layer / (1) layer 5/8" Type X	R-19	60	45	L3173.20-113-11-R0
1Hr	U344	2x4 Wood Studs	24" o.c.	(1) layer 5/8" Type X / (1) layer 5/8" Plywood + 5/8" Type X	R-19	57	41	L3173.19-113-11-R0
1 Hr	U356	2x4 Wood Studs	16" o.c.	7/16" Plywood / (1) layer 5/8" Type X	R-13	51	34	L3173.02-113-11-R0

Wall Tests: The test was performed in accordance with ASTM E 90-09 (2016), Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and ASTM E2235-04 (2012), Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods.

Floor/Ceiling Tests: Available from Clark Dietrich Technical Services.

10" TradeReady® STEEL JOISTS W/LEVELROCK (UL DESIGN NO. G551)

Material Description	STC	IIC	Test Report
Carpet w/ Pad	55	80	J4775.02
Ceramic w/ NobleSeal®	57	50	J4775.06
Shaw Engineered Wood	54	50	J4775.03
Shaw Como Vinyl 12mm	55	48	J4775.04
Shaw Expo Vinyl 6mm	54	47	J4775.05
Baseline System UL Design No. G551 Ceiling: (1) layer 5/8" Type C	54	43	J4775.01
+(1) Gypsum C-Core Layer with: Shaw Expo Vinyl 6mm on top of the floor UL Design No. G551	58	51	J4775.07

16" WOOD OPEN WEB TRUSS (OWT) W/LEVELROCK (UL DESIGN NO. UL-L521)

With (1) layer 5/8" Type C attached to hat channel.

Material Description	STC	IIC	Test Report
Carpet w/ Pad	59	79	J4777.02
Ceramic w/ NobleSeal®	59	53	J4777.06
Shaw Engineered Wood	58	53	J4777.03
Shaw Como Vinyl 12mm	58	51	J4777.04
Shaw Expo Vinyl 6mm	58	51	J4777.05
Baseline System (Nothing on top of LevelRock) UL Design No. UL-L521 Ceiling: (1) layer 5/8" Type C	58	50	J4777.01

16" WOOD OPEN WEB TRUSS (OWT) W/LEVELROCK (UL DESIGN NO. UL-M510)

With (1) layer 5/8" Type C on the bottom of the josit + (2) layers 5/8" Type C attached to hat channel.

Material Description	STC	IIC	Test Report
Carpet w/ Pad	58	75	J4778.02
Ceramic w/ NobleSeal®	57	51	J4778.06
Shaw Engineered Wood	58	50	J4778.03
Shaw Como Vinyl 12mm	58	49	J4778.04
Shaw Expo Vinyl 6mm	58	50	J4778.05
Baseline System (Nothing on top of LevelRock) UL Design No. UL-M510 Ceiling: (1) layer 5/8" Type C + (2) layers 5/8" Type C	58	50	J4778.01

12" WOOD TRUSS JOINT (TJI) W/LEVELROCK (UL DESIGN NO. UL-L518)

With (2) layers 1/2" Type C attached to hat channel.

Material Description	STC	IIC	Test Report
Carpet w/ Pad	62	84	J4776.03
Ceramic w/ NobleSeal®	63	56	J4776.07
Shaw Engineered Wood	62	56	J4776.04
Shaw Como Vinyl 12mm	62	54	J4776.05
Shaw Expo Vinyl 6mm	61	53	J4776.06
Baseline System (Nothing on top of LevelRock) UL Design No. UL-L518 Ceiling: (2) layers 1/2" Type C	62	50	J4776.02

8" CONCRETE SLAB W/ (1) LAYER GYPSUM CEILING

With (1) layer 5/8" Type X attached to hat channel.

Material Description	STC / Test Report	IIC / Test Report
Carpet Tiles	62 RAL-TL21-030	61 RAL-IN21-009
Vinyl Planks 7mm	63 RAL-TL21-031	61 RAL-IN21-010
Baseline System (Nothing on top of 8" Concrete) Ceiling: R-6.7 unfaced fiberglass insulation + (1) layer 5/8" Type X	62 RAL-TL21-032	60 RAL-IN21-011

8" CONCRETE SLAB W/ (1) LAYER GYPSUM CEILING

With (2) layers 5/8" Type X attached to hat channel.

Material Description	STC / Test Report	IIC / Test Report
Carpet Tiles	63 RAL-TL21-029	61 RAL-IN21-008
Vinyl Planks 7mm	63 RAL-TL21-020	64 RAL-IN21-003
Baseline System (Nothing on top of 8" Concrete) Ceiling: R-6.7 unfaced fiberglass insulation + (2) layers 5/8" Type X	63 RAL-TL21-027	64 RAL-IN21-006

Wall Tests: The test was performed in accordance with ASTM E 90-09 (2016), Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and ASTM E2235-04 (2012), Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods.

Floor/Ceiling Tests: Available from ClarkDietrich Technical Services.

Clark Dietrich Sound Clip™ Installation Guide

FURRING CHANNEL:

7/8" 25-gauge hemmed furring channel (7/8" fur, 1-1/4" top & 2-23/32" bottom)


 When splicing, drywall furring channel should have 6 inch overlap in mid span (between two clips) secure with 18ga tie wire, or two 7/16" framing screws. If using in a fire-rated UL application; use only tie wire and no screws.

CLARKDIETRICH SOUND CLIP:

 $3" \times 1-\frac{1}{4}"$ (clip only) maximum spacing 48" o.c. and maximum design load is 36 lbs.

FASTENERS:

- CDSC to Wood: 64mm $(2-\frac{1}{2}")$ # 8 minimum size coarse thread screw. (Recommended #12 or #10 x $2-\frac{1}{2}"$ hex head)
- CDSC to Steel: 38 mm (1- $\frac{1}{2}$ ") # 8 minimum size fine thread screw. (Recommended #12 or #10 x 1- $\frac{5}{8}$ " hex head)
- CDSC to Concrete or CMU: 1/4" drop-in anchor, 1/4" drive spike, 3/16" x tapcon, shoot in pin with washer, or product with equal load capabilities (Minimum 120 lbs Ultimate, Sheer and Pullout). Length of fastener determined by the concrete type, strength, and fastener minimum embed requirements.
- DO NOT attach CDSC to framing members with nails; use only approved screws.





WALLS: ONE AND TWO LAYERS OF 5/8" GYPSUM BOARD

- ClarkDietrich Sound Clip (CDSC) shall be 48" maximum o.c. (horizontal).
- Fasten the CDSC to the substrate with a fastener approved for a minimum pull-out and shear of 120lbs.
- Locate the first row of CDSC within 3-6 inches from the floor and within 3-6 inches from the top track, making sure the clip is attached to the studs and not the track.
- Snap in the drywall furring channel into the CDSC clips (horizontal for walls).
- Place 1/4" (minimum) shim on floor to fully support the gypsum board.
- Install the gypsum board from the bottom up leaving a 1/4" minimum gap around the perimeter of the wall.
- ONLY remove the shims after ALL the gypsum board is completely screwed to ALL the drywall furring channels. Make sure every screw (floor-to-ceiling and wall-to-wall) is installed as required by the assembly design, in every layer of gypsum board before removing the shims at the floor. The shims are critical to ensure best results.
- · Caulk around the entire perimeter of the gypsum board. Use fire and smoke rated acoustical sealant where required.

CEILINGS: ONE AND TWO LAYERS OF 5/8" GYPSUM BOARD

- CDSC shall be 48" maximum o.c.
- Fasten the CDSC to the substrate with a fastener approved for a minimum pull-out and shear of 120lbs.
- Locate the first row CDSC clips within 8" of the wall at each end of a run.
- Snap in the drywall furring channel into the CDSC clips. Channel max spacing at 24" o.c.
- Install the gypsum board from leaving a 1/4" min. gap around the perimeter of the ceiling.
- Caulk around the entire perimeter of the gypsum board. Use fire and smoke rated acoustical sealant where required.

GENERAL INFORMATION:


- · Refer to www.UL.com, or www.clarkdietrich.com for complete installation details on all fire resistive assembly designs.
- ClarkDietrich Sound Clips, furring channel and gypsum board shall not carry heavy loads such as cabinets or bookshelves.
- Seal all potential air leaks with non-hardening acoustical caulking to achieve best noise control results. Use fire rated sealant where required.

FIRE TEST INFORMATION:


Visit <u>clarkdietrich.com</u> for the latest fire testing approvals and updates.

WALL AND CEILING INSTALLATION GUIDE FOR WOOD OR STEEL FRAMING WITH FURRING ON 24" CENTERS

Wall or Ceiling framing at 24" o.c., CDSC at 48" o.c., furring at 24" o.c., 1 or 2 layers of 5/8" gypsum board

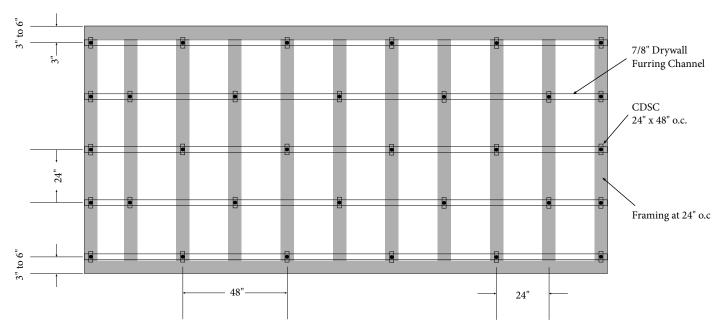

NOTE: DRAWING NOT TO SCALE

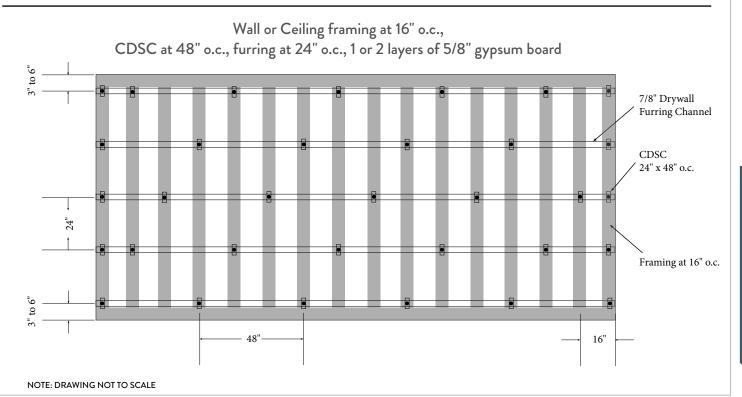

Header Cripple Stud Clip

Eliminates the header track material and is a economical alternative.

Header Cripple Stud Clips are used with RedHeader PRO™ and HDS® Framing System and remove the need for a header track. The L-shaped clips install on the back side of the cripple stud, therefore shorter length clips do not need to be ordered. These labor time-savers include prepunched holes for quicker screw attachments, and are punched for RedHeader PRO and HDS connections.

PRODUCT DIMENSIONS

1-1/2" x 1-1/2" x 3-3/8" 1-1/2" x 1-1/2" x 3-3/4" 1-1/2" x 1-1/2" x 5-3/4" 1-1/2" x 1-1/2" x 7-3/4"

MATERIAL SPECIFICATIONS

Gauge: 16 gauge (54mils)

Design Thickness: 0.0451 inches

Coating: G90


Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches


Coating: G90

INSTALLATION

Header Cripple Stud Clips are attached to the coldformed steel (CFS) framing members using #10 minimum self-drilling screws driven through the clip holes into the steel framing. It is the responsibility of the design engineer to detail the attachment of clips and verify their capacity meets the application. Place the first two screws in each leg in the outermost screw holes. The next screws (if needed) are placed moving from the outermost holes toward the center, symmetrically.

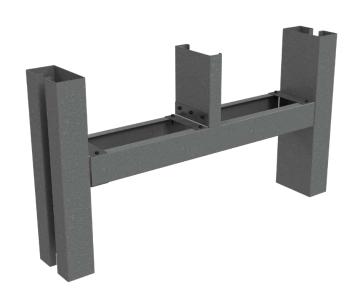

Header Cripple Stud Clip					
Product code	Mils (Gauge)	Design Thickness	Size (in)	For Header Size	Pcs./Bucket
RCSC3-54			1-1/2" x 1-1/2" x 3-3/8	3-5/8" web	400
RCSC4-54	E 4: - (16)	0.0566"	1-1/2" x 1-1/2" x 3-3/4	4" web	200
RCSC6-54	54mils (16ga)		0.0300	1-1/2" x 1-1/2" x 5-3/4	6" web
RCSC8-54			1-1/2" x 1-1/2" x 7-3/4	8" web	100
RCSC3-68			1-1/2" x 1-1/2" x 3-3/8	3-5/8" web	200
RCSC4-68	60: - (11)	0.0713"	1-1/2" x 1-1/2" x 3-3/4	4" web	200
RCSC6-68	68mils (14ga)	0.0715	1-1/2" x 1-1/2" x 5-3/4	6" web	100
RCSC8-68			1-1/2" x 1-1/2" x 7-3/4	8" web	100



Metal Furring Channel Clip

Quickly facilitates the attachment of metal furring channel to 1-1/2" U-channel in ceiling assemblies.

Clark Dietrich metal furring channel clips are made of galvanized wire and used to attach metal furring channels to 1-1/2" U-channels in ceiling gridwork. Clips must be installed on alternating sides of the 1-1/2" channels. Use tie wire when clips cannot be alternated. Clips should only be used when single-layer gypsum or single-layer veneer plaster base is used.

MATERIAL SPECIFICATIONS

MFCCs, made of corrosion-resistant galvanized wire, are used in attaching metal channels to 1-1/2" cold-rolled channel ceiling grillwork. For use with gypsum panels or with single-layer veneer gypsum plaster base. See illustrations.

2" 1-5/8" 2-9/16" Metal Furring Channel Clip

INSTALLATION

MFCCs must be attached on alternate sides of the 1-1/2" U-channels. Use tie wire when clips cannot be alternated.





Metal Furring Channel	Clip (MFCC)
Product code	Pcs./Carton
MFCC	500

Panel Lift Clip

Provides lifting points for prefabricated panels.

The Panel Lift Clip is load rated and is used to safely lift wall panels at assembly warehouses or on job-sites. The clip comes pre-punched for screw attachment to the panel as well as a larger hole for the clamp. The rounded design of the top of the panel clip allows for the clamp to slide freely without getting stuck on the corners. The Panel Lift Clip comes in 12ga and is offered in two sizes, 8" and 12".

PRODUCT DIMENSIONS

PLC8-97: 3" wide x 8" long plate **PLC12-97:** 3" wide x 12" long plate

MATERIAL SPECIFICATIONS

Material: ASTM A 1003 Structural Grade 50

Gauge: 12 gauge (97mils)

Design Thickness: 0.1017 inches

ASTM: A1003, A653


PLC12-97


Galvanized coating meets or exceeds requirements of ASTM A653.

50


INSTALLATION


Install the Panel Lift Clips to each side and intermediate points of the panel. For intermediate clip installation, cut a groove large enough to insert the clip through the top track. Quantity, location and anchoring of clips to panel as designed by EOR. Panel Lift Clip is for single use only, and cannot be reused or reattached.












	Stud thickn	ess	F3 (Panel Lift	ed from a Vertica	l Orientation)	F2 (Panel Lifte	d from a Horizont	tal Orientation
Product code		Fy		97mils (12ga) PLO	:		97mils (12ga) PLO	:
	Mils (Gauge)	(ksi)	w/3 #10 screws	w/5 #10 screws	w/6 #10 screws	w/3 #10 screws	w/5 #10 screws	w/6 #10 screws
	33mils (20ga)	33	530	884	1060	89	205	260
	33mils (20ga)	50	766	1276	1532	129	297	375
	43mils (18ga)	33	789	1315	1578	133	306	387
DI CO 07	43mils (18ga)	50	1140	1900	2279	192	442	559
PLC8-97	54mils (16ga)	33	1109	1849	2219	187	430	544
	54mils (16ga)	50	1602	2671	2775	270	621	786
	68mils (14ga)	50	1644	2740	2775	277	637	806
	97mils (12ga)	50	1644	2740	2775	277	637	806

	Stud thickness		F3 (Panel Lift	F3 (Panel Lifted from a Vertical Orientation)			F2 (Panel Lifted from a Horizontal Orientation)			
Product code	Fy			97mils (12ga) PLO	2	97mils (12ga) PLC				
	Mils (Gauge)	(ksi)	w/5 #10 screws	w/8 #10 screws	w/12 #10 screws	w/5 #10 screws	w/8 #10 screws	w/12 #10 screws		
	33mils (20ga)	33	884	1414	2121	113	231	491		
	33mils (20ga)	50	1276	2042	2775	163	333	710		
	43mils (18ga)	33	1315	2104	2775	168	343	731		
PLC12-97	43mils (18ga)	50	1900	2775	2775	243	496	1056		
PLC12-97	54mils (16ga)	33	1849	2775	2775	237	483	1028		
	54mils (16ga)	50	2671	2775	2775	342	697	1085		
	68mils (14ga)	50	2740	2775	2775	351	715	1085		
	97mils (12ga)	50	2740	2775	2775	351	715	1085		

Notes:

- $\textbf{1} \ \, \text{Attachment to steel framing using \#10 screws with a minimum shear capacity of 1644 lbs.}$
- 2 The use of load distribution spreader bar is assumed for multiple lift points.
- ${\bf 3}$ Panel Lift Clip is for single use only, and cannot be reused or reattached.

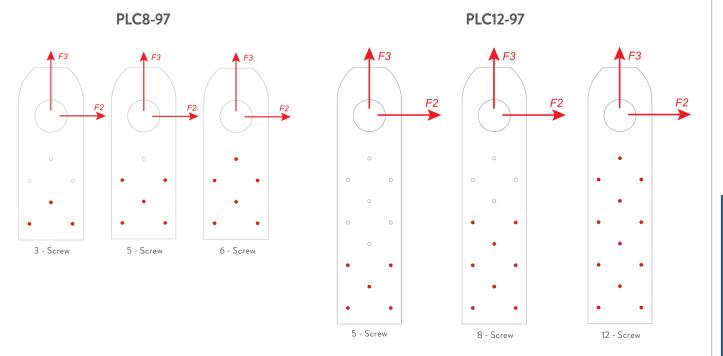

Commercial Strapping

Multipurpose pre-punched commercial coil stock used for bracing, bridging or tension strapping.

Coil Strapping is made in a variety of widths, each with a unique layout of pre-punched holes for a variety of fastening options to meet different application requirements.

PRODUCT DIMENSIONS

1" x 250' 1-1/2" x 250' 2" x 150' 2-1/2" x 150' 3" x 100'

MATERIAL SPECIFICATIONS

Material: 50ksi, G60 Gauge: 20 gauge (33mils) Design Thickness: 0.0346 inches

ASTM: A1003, A653

Material: 50ksi, G90 (Z275) hot-dipped galvanized

Gauge: 18 gauge (43mils)

Design Thickness: 0.0451 inches

ASTM: A1003, A653

TYPICAL APPLICATIONS:

- · Horizontal strap lateral bracing for wall studs
- · Strap bridging for bottom of floor joists
- · Tension strapping for shear wall x-bracing

FEATURES AND BENEFITS:

- · Packaged for easy grab and go on jobsite
- · Various LF lengths to aid in quicker installation
- Pre-punched holes to speed up installation and improve overall installation costs (see EOR for all connections)
- Tension Load Values available

Commercia	l Strapping (0	CS)	
Product code	Thickness	Width	Coil length
CS1-250-33	33mils (20ga)	1 inch	250 ft
CS1-250-43	43mils (18ga)	1 inch	250 ft
CS1.5-200-33	33mils (20ga)	1.5 inch	200 ft
CS1.5-200-43	43mils (18ga)	1.5 inch	200 ft
CS2-150-33	33mils (20ga)	2 inch	150 ft
CS2-150-43	43mils (18ga)	2 inch	150 ft
CS2.5-150-33	33mils (20ga)	2.5 inch	150 ft
CS2.5-100-43	43mils (18ga)	2.5 inch	100 ft
CS3-100-33	33mils (20ga)	3 inch	100 ft
CS3-100-43	43mils (18ga)	3 inch	100 ft













INSTALLATION

Horizontal strap lateral bracing for wall studs

Lateral bracing consists of a field-cut stud or track for solid blocking and steel strap bracing on both flanges of the studs. Solid blocking is placed at each end of the wall, adjacent to wall openings and 8' o.c. maximum. The blocking is attached to each adjacent stud via EasyClipTM E- or S- SeriesTM clips, or when a track is used, the flanges are cut, the web bent and a minimum 4" overlap is used to secure the track block to the studs. Strap bracing, 2" wide and 20ga (33 mils) minimum, is fastened to each solid block and stud flange.



Strap bridging for bottom of floor joists

Spacing of bridging must be calculated based on the required strength. In general, bridging is installed at a maximum of 8' o.c. spacing pendicular to the joists. For example, an 18' joist span would require two bridging runs at 6' o.c. spacing. Where the sub-floor or decking does not provide lateral support, strap must also be installed on the top flange of the joist. Install immediately after joists are erected and before construction loads are applied. Solid blocking is field cut from track or joist sections.



Tension strapping for shear wall x-bracing

Straps are either attached directly to the compression studs or are attached via Gusset Plates. Compression studs must be anchored to the foundation, normally with ClarkDietrich Holdowns. For multi-story construction, the uplift loads are extremely high. It is not uncommon to require 20,000 to 40,000 pounds of uplift force at these connections. Since ClarkDietrich Holdowns are not designed to resist this magnitude of force, it is recommended that embedded plates be installed prior to pouring the concrete foundation. A heavy steel assembly is then welded to the embedded plate and to the compression studs.

Caution: Racking loads are first transferred to the roof or floor decking and then to the shearwalls (X-bracing). The X-bracing then relies on a proper foundation to resist uplift and shear forces. In order for the system to function properly, the load path from the roof or floor deck to the shearwalls to the foundation must be complete. This normally requires additional bracing, blocking, track and rim splices, drag struts, uplift anchors and heavy-duty foundations.



Box Header Clip

Pre-punched clip for box header framing.

The Box Header Clip (BHC) is designed to eliminate field cutting metal track into sections. The BHC clip is prepunched to promote a quick and accurate installation. It is available in a variety of sizes and thicknesses to accommodate different application requirements.

MATERIAL SPECIFICATIONS

Gauge: 18 gauge (43mils)

Design Thickness: 0.0451 inches

Gauge: 16 gauge (54mils)

Design Thickness: 0.0566 inches

Gauge: 14 gauge (68mils)

Design Thickness: 0.0713 inches


Material: 50ksi, G90 (Z275) hot-dipped galvanized

ASTM: A1003, A653

Box Header Clip (BHC) Width (W) Height (H) Product code 362BHC2 2' 362BHC4 4" 362BHC6 3-5/8" 6" 362BHC8 8" 362BHC10 10' 600BHC2 2" 600BHC4 4" 6" 6" 600BHC6 600BHC8 8" 600BHC10 10" 800BHC2 2" 800BHC4 4" 8" 800BHC6 6" 8" 800BHC8 800BHC10

INSTALLATION

Refer to load tables for appropriate box header clip. All pre-punched holes must be filled by placing #10-16 screws to achieve noted capacities.









Box Header Clip (BHC)

	Head							
Product code	gauge	Jamb Gauge						
	(ga)	20	18	16	14	12		
	20	353	353	353	353	353		
	18	353	526	526	526	526		
XXXBHC2-43	16	353	526	839	839	839		
	14	353	526	839	839	839		
	12	353	526	839	839	839		
	20	353	353	353	353	353		
	18	353	526	526	526	526		
XXXBHC2-54	16	353	526	933	933	933		
	14	353	526	933	933	933		
	12	353	526	933	933	933		
	20	353	353	353	353	353		
XXXBHC2-68	18	353	526	526	526	526		
	16	353	526	933	933	933		
	14	353	526	933	933	933		
	12	353	526	933	933	933		


	Head			F2 (lbs.)			
Product code	gauge	Jamb Gauge					
	(ga)	20	18	16	14	12	
	20	990	990	990	990	990	
	18	990	1473	1473	1473	1473	
XXXBHC4-43	16	990	1473	2076	2076	2076	
	14	990	1473	2076	2076	2076	
	12	990	1473	2076	2076	2076	
	20	990	990	990	990	990	
	18	990	1473	1473	1473	1473	
XXXBHC4-54	16	990	1473	2613	2613	2613	
	14	990	1473	2613	2613	2613	
	12	990	1473	2613	2613	2613	
	20	990	990	990	990	990	
	18	990	1473	1473	1473	1473	
XXXBHC4-68	16	990	1473	2613	2613	2613	
	14	990	1473	2613	2613	2613	
	12	990	1473	2613	2613	2613	

	Head		F2 (lbs.)				
Product code	gauge	Jamb Gauge					
	(ga)	20	18	16	14	12	
	20	1717	1717	1717	1717	1717	
	18	1717	2555	2555	2555	2555	
XXXBHC6-43	16	1717	2555	3206	3206	3206	
	14	1717	2555	3206	3206	3206	
	12	1717	2555	3206	3206	3206	
	20	1717	1717	1717	1717	1717	
	18	1717	2555	2555	2555	2555	
XXXBHC6-54	16	1717	2555	4533	4533	4533	
	14	1717	2555	4533	4533	4533	
	12	1717	2555	4533	4533	4533	
	20	1717	1717	1717	1717	1717	
	18	1717	2555	2555	2555	2555	
XXXBHC6-68	16	1717	2555	4533	4533	4533	
	14	1717	2555	4533	4533	4533	
	12	1717	2555	4533	4533	4533	

	Head			F2 (lbs.)			
Product code	gauge	Jamb Gauge					
	(ga)	20	18	16	14	12	
	20	2465	2465	2465	2465	2465	
	18	2465	3668	3668	3668	3668	
XXXBHC8-43	16	2465	3668	4274	4274	4274	
	14	2465	3668	4274	4274	4274	
	12	2465	3668	4274	4274	4274	
	20	2465	2465	2465	2465	2465	
	18	2465	3668	3668	3668	3668	
XXXBHC8-54	16	2465	3668	6509	6509	6509	
	14	2465	3668	6509	6509	6509	
	12	2465	3668	6509	6509	6509	
	20	2465	2465	2465	2465	2465	
	18	2465	3668	3668	3668	3668	
XXXBHC8-68	16	2465	3668	6509	6509	6509	
	14	2465	3668	6509	6509	6509	
	12	2465	3668	6509	6509	6509	

	Head	F2 (lbs.)						
Product code	gauge	Jamb Gauge						
	(ga)	20	18	16	14	12		
	20	2914	2914	2914	2914	2914		
	18	2914	4336	4336	4336	4336		
XXXBHC10-43	16	2914	4336	5343	5343	5343		
	14	2914	4336	5343	5343	5343		
	12	2914	4336	5343	5343	5343		
	20	2914	2914	2914	2914	2914		
	18	2914	4336	4336	4336	4336		
XXXBHC10-54	16	2914	4336	7694	7694	7694		
	14	2914	4336	7694	7694	7694		
	12	2914	4336	7694	7694	7694		
	20	2914	2914	2914	2914	2914		
	18	2914	4336	4336	4336	4336		
XXXBHC10-68	16	2914	4336	7694	7694	7694		
	14	2914	4336	7694	7694	7694		
	12	2914	4336	7694	7694	7694		





Notes:

- 1 Listed capacities are based on AISI S100-16 (2020) w/S2-20, North American Specification for Cold-Formed Steel Structural Members, AISI D114-21, Cold-Formed Steel Clip Angle Design Guide, and AISI Research Report RP18-4.
- 2 Capacities are based on #10-16 screws with an ultimate shear capacity of at least 1400 lbs.
- 3 Capacities are based on #10-16 screws through all of the pre-punched holes in the connector to each side of the box header and #10-16 screws through all of the pre-punched holes in the connector to the jamb.
- 4 Capacities are based on 20ga. and 18ga. 33ksi material and 16ga. and heavier 50ksi material.
- 5 "XXX" = 362 for a 3-5/8" wall, 600 for a 6" wall, and 800 for an 8" wall.

MEP Gusset Plate

Restores structural integrity of steel framing with field modified openings.

The MEP Gusset Plate is designed to provide strength and stiffness to framing members that are modified or field cut at the job site with oversized cutouts on the web of the member. The two-piece design allows the plate to be attached after MEP components have been installed.

- For use with 15mil to 97mil framing members.
- Not for use when flange is cut out.

PRODUCT DIMENSIONS

MEP3 = 3-1/2" x 8" assembled MEP6 = 5-3/4" x 8" assembled

MATERIAL SPECIFICATIONS

Gauge: 16 gauge (54mil)

Design Thickness: 0.0566 inches

Material: 50ksi, G90 (Z275) hot-dipped galvanized





MEP6

INSTALLATION

Installing the ClarkDietrich MEP Gusset Plate in accordance with the following guidelines will return the stud member to its original flexural strength, shear strength, and stiffness.

- The dimensions of the field cut hole shall be no greater than 3" wide by 3" tall for 6" framing members and 2" wide by 3" tall for 3-5/8" members.
- Field cut holes shall be made with a plasma cutter or saw. Torch-cut holes are not permitted.
- The steel around the hole shall not be damaged or distorted.
- A total of (12) #10-16 screws shall be used at each hole repair location as shown in the figure.
- This product cannot be used when framing member's flange is notched.
- Minimum stud web hole spacing shall be maintained for compliance with AISI S100, S220 & S240 standards.
- The axial capacity and web crippling capacity of the stud member shall be considered separately. It is the responsibility of the design professional to verify that the capacity meets the requirements of the intended application.

MEP Gusse)	
Product code	Dimensions (assembled)	Packaging
MEP3	3-1/2" x 8"	25 Sets (A&B)
MEP6	5-3/4" x 8"	25 Sets (A&B)






Product Detail


Visit our CAD Library at clarkdietrich.com to view or download construction details in .dwg, .dxf, and .pdf formats.

BRIDGING DETAILS


Spazzer® 9200 Bridging




Spazzer 5400 Bridging



U-Channel Bridging Connection




Block and Strap Bridging




HEADER DETAILS


Curtain Wall RedHeader PRO™ Header & Jamb



Curtain Wall HDS® Header & Jamb




Load-Bearing HDS Header & Jamb




HEAD-OF-WALL DEFLECTION DETAILS

Long Leg Track with Spazzer 5400




Long Leg Track with U-Channel



LONG LEG OVERSIZED TRACK TYPICAL STUD

Long Leg Track with Fast Top™ Clip



Details shown in this brochure are for example only. The engineer of record on the project is responsible for the design of the connection to the structure. Additional connection details can be found at clarkdietrich.com.

PRODUCT NAME INDEX

2x6 FR Blocking	Floor Framing Connections 120-137	0
5400 Spazzer® Spacer Bar	FR Blocking	QuickTwist™ Web Stiffener134–135
9200 Spazzer Spacer Bar	Furring Clip	~
· · · · · · · · · · · · · · · · · · ·		R
A	G	Rafter Connections 130-131, 164-165, 166-167
Aluminum Burn Clip	G-Series™ Punched Gusset Plate	Recycled Content
A-Series™ End Clip	Gauge	Rigid Connections
Anchor Clip D-Series™	General Notes	Roof and Truss Connections
ASTM199	GP-Series [™] Unpunched Gusset Plate 166–167	c
В	Green Building	S Coming TM Company Clin
Backer Bar	Grommets	S-Series™ Support Clip
BlazeFrame® Shield	Gusset Plate for Shearwall Bracing	Sales
Box Header Clip	Gusset Plates	Screw Connections
Bridging, Bracing and Backing 138–161	H	Seismic Clip
Bridging Details	H-Series™ Universal Header Hanger 98–99	Shop Drawings
Bridging Termination Clip144-145	HDSC Header Bracket 172–175	Skewable Angle
Bridle Hanger	Head-of-Wall	Sound Clip
•	Head-of-Wall Deflection Details	Spazzer® 5400 Spacer Bar
	Header Cripple Stud Clip184	Spazzer® 9200 Spacer Bar
CC33 ³ / ₄ " Channel Clip	Header Details194	Spazzer® Bar Fly Clip
Clark Dietrich Holdown	Header Hanger	Spazzer® Bar Guard™
Clark Dietrich Moment Clip	Headers	Spazzer® Snap-In Grommet
Clark Dietrich Seismic & Hurricane Clips 164–165	Holdown	Special Order Connections2-3
Clark Dietrich Skewable Angle	Holdown Plate	Specialty Clips, Accessories
Clark Dietrich Sound Clip	How to Use This Catalog	Specification Options
Clip Angle U-Series TM	Hurricane Clip	Splice Plate
Clip Angle X-Series TM	The second secon	Standards and Specifications
Clip Express SM Display Program	I	Steel Thickness
Code Approvals	_	Support Clip E-Series™
Commercial Strapping	J	Support Clip L-Series TM
Custom Clips 2-3	_	Support Clip S-Series™90–91
D	14	SwiftClip™ L-Series™ Support Clip 86–87
D-Blaze [®] 156–157	K	±
D-Series™ Anchor Clip	ksi10	T.C. : TM T. II.A. I. CI:
Danback® Flexible Wood Backing Plate 156–157	L	T-Series TM Tall Anchor Clip
Deflection Connections12–43	L-Series™ Support Clip	Tall Anchor Clip T-Series
Drift Connections	LA-Series™ Support Clip86–87	Technical Assistance
Drift FastClip™ Slide Clip	LE-Series™ Support Clip88	Technical Services
Drift Head-of-Wall	LS-Series™ Support Clip	Trademarks
Drift Rail and Clip54–71	LEED®199	
Drift Headed Rail and Clip54-71	Load Tables9	TradeReady® Splice Plate
E	Locations	Truss Holdowns
E-Series™ Support Clip		Typical Construction Details
EasyClip TM A-Series TM End Clip92–93	M	Typical Collistiaction Details
EasyClip D-Series TM Anchor Clip	Material Certification	U
EasyClip E-Series™ Support Clip136–137	MEP Gusset Plate	U-Series™ Clip Angle89
EasyClip S-Series™ Support Clip90–91	Metal Furring Channel Clip	Understanding Load Tables
EasyClip T-Series Tall Anchor Clip	Metal Thickness	Uni-Clip™ End Clip74–75
EasyClip U-Series™ Clip Angle	Metric Specifications	Universal Bypass Clip22–27, 80-85
EasyClip X-Series™ Clip Angle146–147	Moment Clip	Universal Joist Hanger
EasyClip QuickTwist™ Web Stiffener 134–135	N	V
End Clip A-Series	_	•
Engineering Services		
Extended FastClip™ Slide Clip	0	W
Extended LE-Series™ Support Clip88	_	Warranty198
Extended Uni-Clip TM	P	Web Stiffener
Extended Uni-Clip™ w/Anchor Holes78–79	Packaging10	Weld Types
<u>-</u>	Panel Lift Clip	Welded Connections
F 5 6 74	Performance Standards	X
Fast Strut TM	Pony Wall Heavy110-113	
Fast Top TM Clip	Pony Wall Light	X-Series™ Clip Angle
FastBack™ Backing System	Powder-Actuated Fasteners	Υ
FastBridge TM Clip	Product Detail	Yield Strength
Fast Clip TM Slide Clip	Product Information10	-
FastClip TM Slide Clip w/Anchor Holes 20-21	Product Labeling10	Z
Fastening Options	Product Warranty198	_
Field Skewable TradeReady® Splice Plate 130–131 Fixed Universal Slip Clip 42-43, 118-119	Proprietary Deflection Screw	
FlamePRO® Fire Retardant	4, 14, 17, 20, 28, 31, 40, 43, 46-47, 48-49, 55	
Flat Tail™ Slide Clip	Protective Coatings	
	0	

PRODUCT CODE INDEX

A	FCEC 6	LE68786-87	S97190-91
A54392–93	FCEC 817–19	LE6816	S973 90-91
A54692–93	FCEC 10	LE681888	S975
A68392-93	FCEC 12	LE682088	S977 90-91
A68692–93	FCSC 3-1/2	LE682488	S979 90–91
A97392–93	FCSC 5-1/214-16	LE683088	SA3128-129
A975 92–93 A976 92–93	FCSC-HD20-21	LE683688	SA4
	FRB26-16	LE97386–87	SA5
AB			
AB30	FS1240-41	LE97586-87	SA6128-129
AB35176	FS15	LE977	SA7128-129
AB40 176	FS1840-41	LGPW	SA9
AB45176	FS20 40-41	LS541	SFLY154
AB63176	FS22 40-41	LS5413 86-87	SPBG149
	FS24 40-41	LS54386-87	SPGR149
В	FS316, FS324 159	LS54586-87	SPZD148
BB12158	FS416, FS424159	LS54786-87	SPZS
BB16	FS616, FS624 159	LS54986-87	_
BB24158	FTC328-30	LS681	T
BHC 190-191	FTC528–30	LS6813	T68394-95
BTC	FTC828–30	LS68386-87	T685
_	FTC1028–30	LS68586-87	T97394-95
C	FTC10	LS68786-87	T975
CC33142-143	FTSC	LS68986-87	TDSB133
CD8-B100-103			TDSP130-131
CD10-B100-103	FUS642-43, 118-119	LS97186-87	
CD15-B100-103	FUS842-43, 118-119	LS9713 86-87	U
CD8-S100-103	G	LS973 86-87	U54389
CD10-S100-103	G436168–169	LS975	U54589
CD15-S100-103		LS977 86-87	U54789
CDBV122–123	G546	LS979 86-87	U54989
CDMB	G686		U68389
CDSC	GP166–167	M	U68589
CS	GROM 3/4177	MC103P108–109	U68789
C5188-189	GROM 1-1/2 177	MC105P108-109	U68989
D		MC107P108-109	
D16C156-157	H	MC683P108-109	U97389
D16F	H43698–99	MC685P108-109	U97589
	H54698-99	MC687P108-109	U97789
D24C156-157	H68698-99	MC973P108–109	U97989
D24F156-157	HC2164-165	MC975P108–109	UBC 22–27, 80-85
D68394-95	HC2A164-165	MC977P108-109	UCEC74-75
D68594-95	HC2.5164-165	MEP3	UJH124-126
D97394-95	HC3 164-165	MEP6	UXRC676-77
D97594-95	HDP104-107		UXRC6-HD 78-79
D-FCSC46-49	HDSC 3-1/2172–175	MFCC185	UXRC876-77
DHOW50-53	HDSC 3-7/8	N	UXRC10
DHR	HDSC 5-7/8	14	UXRC12
DRC54-71	HDSC 7-7/8		O/((C12
	ND3C 7-7/61/2-1/3	0	V
E	1	_	_
E541136-137	_		
E543136-137		P	W
E545136-137	J	PLC8186-187	_
E547	JB132	PLC12	
E549136-137		PW 110-113	X
E681	K		X543146-147
E683	_	Q	X545146-147
E685		QTWS134-135	X547
E687	L	_	X549146-147
	LA543 86-87	R	X683146-147
E689136–137	LA545 86-87	RCSC184	X685146-147
E971136–137	LA54786-87	S	X687
E973	LA68386-87		X689146-147
E975	LA68586-87	S54190-91	X973
E977	LA68786-87	\$54390-91	X975
E979	LA97386-87	\$545	X977
E	LA97586-87	\$54790-91	X977
F	LA97786-87	S54990-91	Λ7/7140-14/
FB3396-97,140-141	LE54386-87	S68190-91	Υ
FB4396-97, 140-141	LE545	S68390-91	· -
FB6896-97, 140-141	LE54786-87	S68590-91	
FBBC155	LE683	S687 90-91	Z
FBW155	LE685	S68990-91	_
	LL00300-0/		

Clip Express[™] Display Program



CLARKDIETRICH CLIP EXPRESS™ PRODUCT DISPLAYS

ClarkDietrich is committed to providing the product data, application details and hands-on tools necessary to help our customers select the best part for a specific design challenge.

For those dealers willing to commit resources to a stocking program for Clark Dietrich clip products, we offer the opportunity for the co-op development of Clip Express Product Displays. These displays provide dealers and contractors with the opportunity to visualize how many of our products can be used in a variety of applications. For more information, please contact the Clip Express sales team:

Clip Express-866.638.1908

Trademarks and Warranty

PATENTS

U.S. Patent Nos. 6,021,618; 6,688,069;

D814,905; D822,455 are owned by ClarkDietrich

U.S. Patent No. 7,882,676 is owned by

Jeffrey Thomas Ellis

U.S. Patent No. 6,705,056 is owned by

Kathy Tollenaar

TRADEMARKS

ClarkDietrich® is a registered trademark of ClarkDietrich Building Systems.

Owned trademarks by Clark Dietrich Building Systems:

ProSTUD®, TRAKLOC®, TradeReady®, Spazzer®,
FastClip™, EasyClip™, Fast Top™, Fast Strut™,
FastBridge™, Uni-Clip™, Clip Express™, Stronger
Than Steel™, FastBack™, HDS®, RedHeader
PRO™, QuickTwist™, Slide Clip™, SubmittalPro®,
SwiftClip™, A-Series™, D-Series™, E-Series™,
G-Series™, GP-Series™, H-Series™, L-Series™,
L-Series™, LE-Series™, L-Series™, X-Series™,
T-Series™, U-Series™, X-Series™, MaxTrak®, Bar
Guard™, DoubleTrack™ QC-Series™, BackerBead®,
ClarkDietrich Wall Type Creator®, DiamondPlus® and
ClarkDietrich Sound Clip™.

Buildex* is a registered trademark of Illinois Tool

Works, Inc.

U.S. Patent No. D820,664 owned by

Allen Innovations, LLC

D-Blaze® is a registered trademark of Viance, LLC

FlamePro® is a registered trademark of Koppers Performance Chemicals, Inc.

LEED° is a registered trademark of the U.S. Green Building Council

Danback® is a registered trademark of Kathy Tollenaar

UL* and **UL Design*** are trademarks of Underwriter's Laboratories, Inc.

Hilti is a registered trademark of Hilti Aktiengeseilschaft Corporation

WARRANTY

Our products are manufactured in accordance with company standards and/or industry standards, as applicable. All ClarkDietrich Building Systems products are covered by our standard warranty which is contained in our Standard Terms and Conditions of Sale and which will be provided upon request. Generally, we warrant our products will be free from defects in material and workmanship at the time of shipment, subject to the limitations stated in the warranty. Unless specifically agreed in writing by us with respect to specific orders, we do not make any warranty of merchantability or fitness for a particular purpose. The buyer is responsible to assure that buyer orders the appropriate product for any applicable code or specification requirements.

NOTICE: Our liability is expressly limited to replacement of defective products. We shall not be liable for incidental and consequential damages, nor for any loss caused by misuse or misapplication of our products. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from the date it was or reasonably should have been discovered.

Clip Express^{5M} CODE APPROVALS AND PERFORMANCE STANDARDS

ClarkDietrich Clip Express products meet or exceed these applicable performance standards.

ClarkDietrich Clip & Connector Standards

AISI S100-16 (2020) w/S2-20 - North American Specification for the Design of Cold-Formed Steel Structural Members AISI S240-20 - North American Standard for Cold-Formed Steel Structural Framing

Clark Dietrich Nonstructural Framing comply with:

2021 International Building Code

Intertek CCRR-0208 - FastClip™ / Universal Bypass Clip

SFIA (Steel Framing Industry Assocation) Connector Code Compliance Certification Program

LEED® Services BUILD GREEN with Clark Dietrich

Clark Dietrich is an active member of the U.S. Green Building Council and is committed to supplying quality products that are environmentally responsible. We are continually working to develop greener building products and sustainable business practices. Clark Dietrich steel framing helps contribute points toward LEED® certification. For more details contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LFED.

SustainabilityPro

Quickly access the product-specific information and certifications needed to calculate contributions to LEED® and other green building certification and rating systems - all in one platform. Find out more at www.clarkdietrich.com/LEED.

Clark Dietrich is a proud member of the Steel Framing Industry Association (SFIA). Check the updated list of Certified Production Facilities at Intertek's website at www.intertek.com. ClarkDietrich has prepared this literature with the utmost diligence and care for accuracy and conformance to standards.

ClarkDietrich intends this information to be accurate, informative, and helpful as a selection guide for choosing ClarkDietrich products. However, this information is only to be used for guidance and is not intended to replace the design, drawings, specifications, and decisions of a professional architect or engineer.

ClarkDietrich or its affiliates shall not be responsible for incidental or consequential damages, directly or indirectly sustained, nor for loss caused by application of our products for other than their intended uses. Our liability is limited to replacement of defective products. Claims shall be deemed waived unless they are made to us in writing within thirty (30) days of the date a problem was or reasonably should have been discovered.

ClarkDietrich reserves the right to modify or change any information contained in this literature without notification.

AIA Continuing Education















USGBC and related logo is a trademark owned by the U.S. Green Building Council and is used by permission.

LOCATIONS

ClarkDietrich Manufacturing and Sales Locations:

CALIFORNIA Riverside	CALIFORNIA Sacramento	CONNECTICUT Bristol	FLORIDA Dade City
P 951.360.3500	P 951.360.3500	P 866.921.0023	P 352.518.4400
FLORIDA, Miami	GEORGIA McDonough	ILLINOIS Rochelle	MARYLAND Baltimore
P 305.477.6464	P 678.304.5500	P 800.659.0745	P 410.477.4000
MISSOURI O'Fallon	OHIO Warren-East	OHIO Vienna	TEXAS Dallas
P 636.300.1411	P 330.372.5564	P 330.372.4014	P 214.350.1716
TEXAS Pasadena	CLIP EXPRESS™ p 866.638	3.1908	

McDonough

Warren Sacramento

Dallas

ClarkDietrich Engineering Services. A full spectrum of solutions.

Toll-Free Phone: 877.832.3206 Toll-Free Fax: 877.832.3208 Technical Services: 888.437.3244 Email: engineering@clarkdietrich.com

CENTRAL Merrillville, IN SOUTHEAST McDonough, GA NORTHEAST Bristol, CT WEST Carlshad, CA

P 281.383.1617

Online Revision 4/8/24: Pg. 110-113 Updated Pony Wall Charts 5/6/24: Pg. 192 - Added MEP Gusset Plate

Turn to ClarkDietrich for a complete lineup of steel construction products and services nationwide:

Interior Framing · Exterior Framing · Interior Finishing · Exterior Finishing · Clips/Connectors · Engineering

