



COMPOSITE DRYWALL CORNER BEADS, TRIMS, TAPES & PATCHES



## flexible corner beads - paper-faced composite

Strait-Flex Gold 4
Strait-Flex Mid-Flex 5
Strait-Flex Wide-Flex 5

## flexible corner beads - composite

Strait-Flex Medium 6 Strait-Flex Uno-Bead 222 9
Strait-Flex Original 7 Strait-Flex Wet-Flex 9
Strait-Flex Arch-Flex 7

## stick corner beads - paper-faced composite

 Strait-Flex IS-300
 10
 Strait-Flex OS-400
 11

 Strait-Flex OS-300
 11

## stick corner beads - composite

Strait-Flex Arch-Stick 12 Strait-Flex Wet-Stick 13
Strait-Flex Big-Stick 13

## premium trims & tapes

Strait-Flex Perfect-90° 14 Strait-Flex L-Bead 15 Strait-Flex Tile-Tape 17 Strait-Flex Ammo-Flex 14 Strait-Flex Tuff-Tape 16 Strait-Flex Butt-Tape 17 Strait-Flex Edge-Tape 15 Strait-Flex Crack-Tape 16

### patches

Ultra-Patch	18	Head-Patch	20	Can-Patch COMMERCIAL	21
Roll-Patches	18	Black-Iron Patch	20	Deck-Patch	21
Perma-Patch	19	Pipe-Patch	20		
Outlet-Patch	19	Can-Patch RESIDENTIAL	21		

## tools & accessories

Mud-Pro <sup>2</sup>	22	Super-Bond	24	Extension Pole	25
Inside Rolling Tools	23	Drywall Shims	24	Flex-Folder	25
Outside Rolling Tools	23	Multi-Purpose Sprayer	24	Scissors	25

## x-crack

Strait-Flex X-Crack 26

# Flexible Corner Beads PAPER-FACED COMPOSITE

#### **FEATURES**

High-performance drywall corner bead.

Memory-free hinge produces straight corners and perfect angles.

Installs with all-purpose joint compound.


Composite structural backing provides strength and a superior bond to the drywall surface.

Diamond-punched paper edging provides maximum adhesion - no cracks, no call backs.

Finishing compound is not required over the laminated area - uses half the compound vs. standard corner bead.

Paper will not fuzz-up during sanding.

Resists dents and common cracking problems.

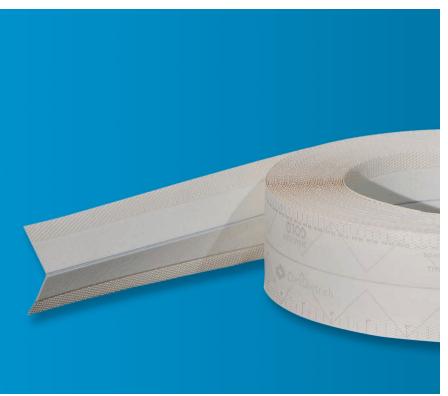




FINISHES INSIDE & OUTSIDE 90° AND OFF-ANGLE CORNERS

\_\_\_\_\_·

21/2"w (63mm)





Inside 90° corners where a large fill or straightening is required, no back filling needed. Great for vaulted, coffered and tray ceilings, bay windows.





# SPECIFICATIONS 100 FT ROLLS WHOLESALE CASE

Item Size: 2<sup>1</sup>/2" x 100' (63mm x 30.5m) Item Weight: 3.1 lbs. (1.4kg) Item UPC: 7-51361-50316-6 Case Item No. GOLD-100 Case Pack: 10 rolls Case UPC: 7-51361-50317-3 Case Weight: 32 lbs. (14.5kg) Cases per Pallet: 24 Pallet Weight: 832 lbs. (377kg) Pallet Size: 40"x 48"x 66"









## Strait-Flex Mid-Flex

FINISHES INSIDE AND OUTSIDE 90° AND OFF-ANGLE CORNERS


3"w (76mm)





- Outside corners where common gaps in drywall are present.
- Outside corners where a large fill or straightening is required, no back filling needed.


☐ Great for vaulted, coffered and tray ceilings, bay windows.

SPECIFICATIONS	
100 FT ROLLS	WHOLESALE CASE
Item Size: 3" x 100' (76mm x 30.5m) Item Weight: 4 lbs. (1.81kg) Item UPC: 7-51361-50318-0	Case Item No. MF-100 Case Pack: 10 rolls Case UPC: 7-51361-50319-7 Case Weight: 39 lbs. (17.7kg) Cases per Pallet: 24 Pallet Weight: 976 lbs. (443kg) Pallet Size: 40"x 48"x 60"









## Strait-Flex Wide-Flex

FINISHES INSIDE AND OUTSIDE 90° AND OFF-ANGLE CORNERS

4"w (102mm)

- Outside corners where large gaps in drywall are present.
- Hard-to-straighten corners outside and vaulted ceilings.

Outside corners for double 5/8" drywall.

Great for vaulted, coffered, tray and cathedral ceilings.




## SPECIFICATIONS


100 FT ROLLS WHOLESALE CASE


Item Size: 4" x 100'

Case Item No. WF-

(102mm x 30.5m) Item Weight: 4 lbs. (1.81kg) Item UPC: 7-51361-50320-3 Case Item No. WF-100
Case Pack: 7 rolls
Case UPC: 7-51361-50321-0
Case Weight: 41 lbs. (18.6kg)
Cases per Pallet: 24
Pallet Weight: 1,024lbs. (465kg)
Pallet Size: 40"x 48"x 71"

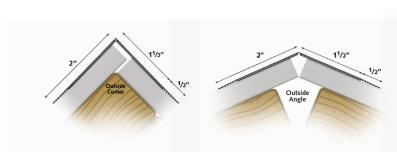





5

# Flexible Corner Beads COMPOSITE

#### **FEATURES**

High-performance drywall corner bead.

Installs with all-purpose compound.

Spans gaps in drywall. No back-filling required.

Composite fiber backing embeds into compound to provide a superior bond to the drywall surface.

First finishing coat of compound can be applied immediately with no delayed shrinkage, no edge cracking.

Full composite construction, no paper.


Resists dents and common cracking problems.





FINISHES INSIDE 90° & OFF-ANGLE CORNERS

21/4"w (57mm)




Inside corners where small gaps in drywall are present.


- Inside 90° corners where a small fill or minor straightening is required, no back filling needed.
- Great for vertical and wall-to-ceiling inside corners, inside angles of bay windows.

· 184	
STRAIT-FLEX MEDIUM FLEXIBLE CORNER BLAD STRAINS STRAINS	
ChaDai	
	and the same of

# SPECIFICATIONS 100 FT ROLLS WHOLESALE CASE

Item Size: 2<sup>1</sup>/4" 100' (57mm x 30.5m) Item Weight: 2.5 lb. (1.13kg) Item UPC: 7-51361-50336-4 Case Item No. **5M-100**Case Pack: 12 rolls
Case UPC: 7-51361-50337-1
Case Weight: 30 lbs. (13.6kg)
Cases per Pallet: 24
Pallet Weight: 750 lbs. (327kg)
Pallet Size: 31"x 31"x 50"





# Strait-Flex Original


FINISHES INSIDE AND OUTSIDE 90° AND OFF-ANGLE CORNERS

23/8"w (60mm)




- Replaces standard corner bead and uses half the compound.
- Spans common gaps in drywall. No back-filling required.
- Great for coffered and tray ceilings, bay windows.
- Inside corners where gaps in drywall are present.

SPECIFICATIONS	
100 FT ROLLS	WHOLESALE CASE
Item Size: 2 3/8" x 100' (60mm x 30.5m) Item Weight: 2.8 lb. (1.3kg) Item UPC: 7-51361-50338-8	Case Item No. <b>SO-100</b> Case Pack: 12 rolls Case UPC: 7-51361-50339-5 Case Weight: 34 lbs. (15.4kg) Cases per Pallet: 24 Pallet Weight: 846 lbs. (384kg) Pallet Size: 32"x 32"x 53"

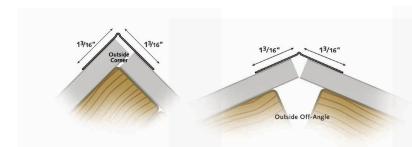





33/8"w (86mm)





## **Strait-Flex Arch-Flex**


DESIGNED FOR COMPOUND ARCHES AND DOUBLE CURVE APPLICATIONS

- Arched windows and doors, tight radius curves, and free-form curves.
- Curved walls, ceilings, soffits, staircases, barrel vaults, and cathedral ceilings.
- Installs using standard compounds.No special tools or fasteners needed.
- Taping around circular air ducts.
- Produces smooth, professional-looking curves. Tear strips allow for easy straightto-curve transitions.
- Resists dents, paint chipping, shrinkage, and common cracking problems.

SPECIFICATIONS			
50 FT ROLLS	WHOLESALE CASE	100 FT ROLLS	WHOLESALE CASE
Item Size: 33/8"x 50' (86mm x 15.25m) Item Weight: 2.5 lbs. (1.13kg) Item UPC: 7-51361-50340-1	Case Item No. AF-50 Case Pack: 12 rolls Case UPC: 7-51361-50341-8 Case Weight: 30 lbs. (13.6kg) Cases per Pallet: 16 Pallet Weight: 510 lbs. (231kg) Pallet Size: 30"x 30"x 49"	Item Size: 33/8"x 100' (86mm x 30.5m) Item Weight: 4.8 lbs. (2.18kg) Item UPC: 7-51361-50342-5	Case Item No. AF-100 Case Pack: 12 rolls Case UPC: 7-51361-50343-2 Case Weight: 58 lbs. (26.3kg) Cases per Pallet: 20 Pallet Weight: 1126 lbs. (511kg Pallet Size: 34"x 34"x48"





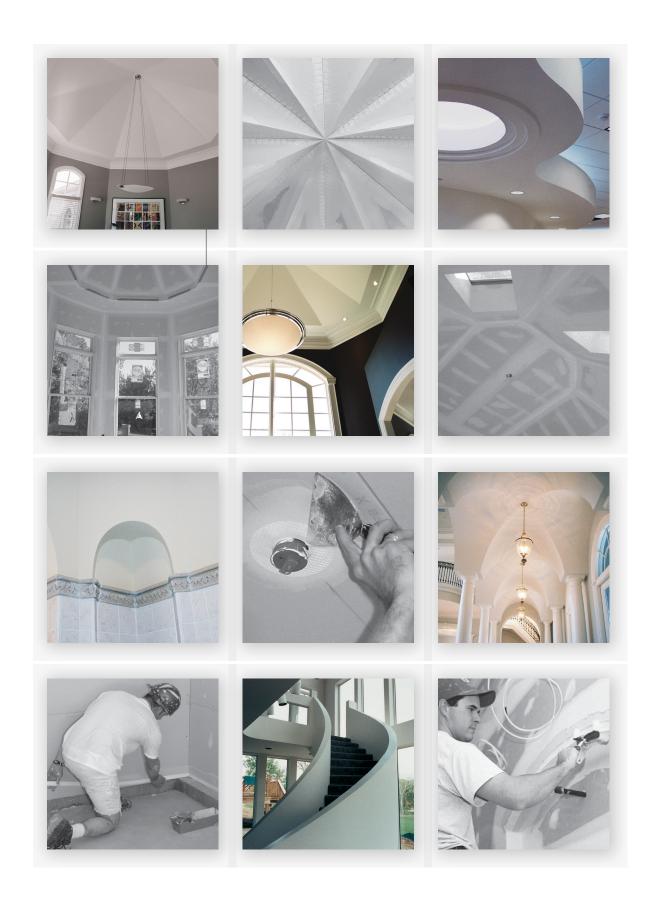

## Strait-Flex Uno-Bead <sup>222</sup>

DESIGNED FOR REPLACING OR REPAIRING METAL CORNER BEAD

2.22"w (56mm)





- Creates perfect inside and outside corners.
- Ideal for drywall, thin-coat plaster applications.
- High traffic areas where bumps and dents commonly occur.
- Permanent replacement for damaged metal corner bead.
- Eliminates edge cracking.


#### SPECIFICATIONS

#### 100 FT ROLLS WHOLESALE CASE

Item Size: 2<sup>1</sup>/4" x 100' (57mm x 30.5m) Item Weight: 2.5 lbs. (1.1kg) Item UPC: 7-51361-50348-7 Case Item No. UB222-100 Case Pack: 12 rolls Case UPC: 7-51361-50349-4 Case Weight: 30 lbs. (13.6kg) Cases per Pallet: 24







## **Strait-Flex Wet-Flex**

DESIGNED AS A WATER-ACTIVATED OUTSIDE 90° AND OUTSIDE OFF-ANGLE CORNER BEAD ON A ROLL

3 "w (76mm)




- Easily transported to and from job site. No waste.
- Water-activated adhesive on inside of roll.
- Impact-resistant nose.
- Small bead creates a perfect, clean edge.
- Small fill coat. Fast drying.
- No paper-face to fuzz-up, burn-through, delaminate, or curl.
- No delayed shrinkage.
- No edge cracking.

#### SPECIFICATIONS

# 100 FT ROLLS WHOLESALE CASE

Item Size: 3" x 100' (76mm x 30.5m) Item Weight: 4.9 lbs. (2.2kg) Item UPC: 7-51361-50350-0 Case Item No. WETF-100 Case Pack: 8 rolls Case UPC: 7-51361-50351-7 Case Weight: 40 lbs. (18.1kg) Cases per Pallet: 24

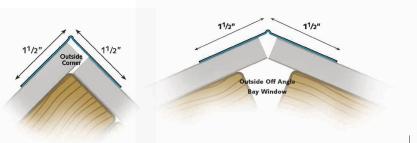

# Stick Corner Beads PAPER-FACED COMPOSITE

#### **FEATURES**

Clean, square, low-profile installation.


Composite backing provides a tough, durable corner.


Diamond-punched paper edging allows for easier feathering, faster drying, and the highest bonding strength. Also guarantees an even lay down of paper, providing maximum adhesion with no rippling or blistering.

Paper surface is pre-treated to accept paint. Finishing compound is not required over laminated area.

Perfect corners without paper fuzz-up during finishing and sanding.

Straightens common framing irregularities.

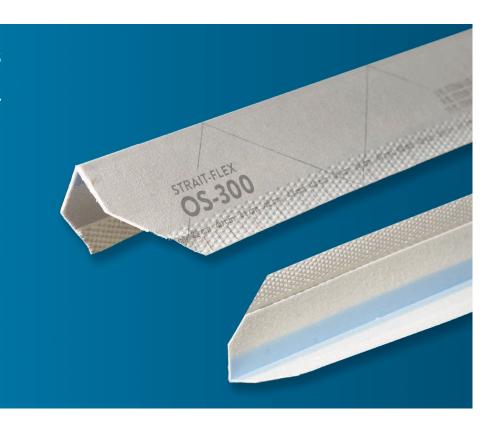

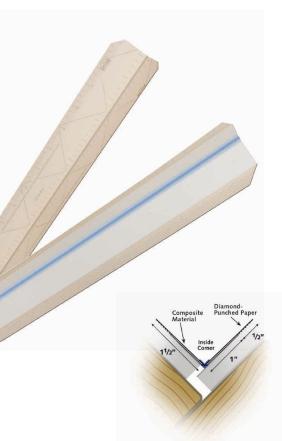

## Strait-Flex IS-300

DESIGNED FOR INSIDE 90° CORNERS WHERE SPEED, AND STRENGTH ARE NEEDED, AND WHERE LARGE FRAMING IRREGULARITIES NEED TO BE OVERCOME

3 "w (76mm)

- Vertical or horizontal inside 90° corners.
- Diamond-punched paper edging allows for easier feathering, faster drying, and the highest bonding strength. Also guarantees an even lay-down of the paper, providing maximum adhesion with no rippling or blistering.
- Clean installation.
- Composite PVC provides a tough, durable corner.
- Perfect corners without paper fuzz-up during finishing and sanding.

SPECIFICATIONS			
<b>8 FT STICK</b> (244cm)	<b>9 FT STICK</b> (274cm)	<b>10 FT STICK</b> (305cm)	<b>12 FT STICK</b> (366cm)
Item No. <b>IS300-8</b> Item Size: 3" x 8' (76mm x 244cm)	Item No. <b>IS300-9</b> Item Size: 3 " x 9' (76mm x 274cm)	Item No. <b>IS300-10</b> Item Size: 3" x 10' (76mm x 305cm)	Item No. <b>IS300-12</b> Item Size: 3" x 12' (76mm x 366cm)
WHOLESALE CASE	WHOLESALE CASE	WHOLESALE CASE	WHOLESALE CASE
Case Pack: 50pc. 400 lf (122m) Case UPC: 7-51361-50276-3 Case Weight: 18 lbs. (8.2kg) Cases per Pallet: 32	Case Pack: 50pc. 450 lf (137m) Case UPC: 7-51361-50278-7 Case Weight: 20.4 lbs. (9.3kg) Cases per Pallet: 32	Case Pack: 50pc. 500 lf (152m) Case UPC: 7-51361-50280-0 Case Weight: 23 lbs. (10.4kg) Cases per Pallet: 32	Case Pack: 50pc. 600 lf (183m) Case UPC: 7-51361-50282-4 Case Weight: 27.6 lbs. (12.5kg) Cases per Pallet: 32




## Strait-Flex OS-300

DESIGNED FOR SQUARE, LOW-FILL OUTSIDE 90° CORNERS

3"w (76mm)

- Vertical or horizontal outside 90° corners.
- Diamond-punched paper edging allows for easier feathering, faster drying, and the highest bonding strength. Also guarantees an even lay-down of the paper, providing maximum adhesion with no rippling or blistering.
- Clean installation.
- Composite backing provides a tough, durable corner with no rust.
- Nose resists dents and ensures perfect corners without paper fuzz-up during finishing and sanding.

SPECIFICATIONS			
<b>8 FT STICK</b> (244cm)	<b>9 FT STICK</b> (274cm)	<b>10 FT STICK</b> (305cm)	<b>12 FT STICK</b> (366cm)
Item No. <b>O5300-8</b> Item Size: 3 " x 8' (76mm x 244cm)	Item No. <b>O5300-9</b> Item Size: 3 " x 9' (76mm x 274cm)	Item No. <b>O5300-10</b> Item Size: 3 " x 10' (76mm x 305cm)	Item No. <b>OS300-12</b> Item Size: 3" x 12' (76mm x 366cm)
WHOLESALE CASE	WHOLESALE CASE	WHOLESALE CASE	WHOLESALE CASE
Case Pack: 50pc. 400 lf (122m) Case UPC: 7-51361-50160-5 Case Weight: 18 lbs. (8.2kg) Cases per Pallet: 32	Case Pack: 50pc. 450 lf (137m) Case UPC: 7-51361-50272-5 Case Weight: 20.4 lbs. (9.3kg) Cases per Pallet: 32	Case Pack: 50pc. 500 lf (152m) Case UPC: 7-51361-50162-9 Case Weight: 23 lbs. (10.4kg) Cases per Pallet: 32	Case Pack: 50pc. 600 lf (183m) Case UPC: 7-51361-50274-9 Case Weight: 27.6 lbs. (12.5kg) Cases per Pallet: 32

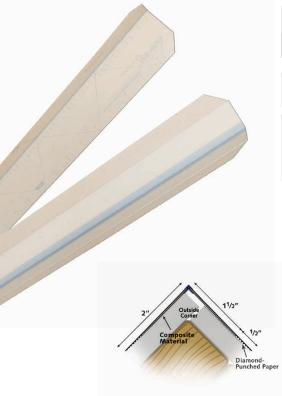

## Strait-Flex OS-400

DESIGNED FOR OUTSIDE 90° CORNERS WHERE LARGE VOIDS AND IRREGULARITIES OCCUR. DOUBLE 5/8" DRYWALL

4"w (102mm)

- Double 5/8" drywall applications and outside 90° corners where there are large drywall irregularities.
- Diamond-punched paper edging allows for easier feathering, faster drying, and the highest bonding strength. Also guarantees an even lay-down of the paper, providing maximum adhesion with no rippling or blistering.
- Clean installation.
- Composite backing provides a tough, durable corner with no rust.
- Nose resists dents and ensures perfect corners without paper fuzz-up during finishing and sanding.

SPECIFICATIONS			
<b>8 FT STICK</b> (244cm)	<b>9 FT STICK</b> (274cm)	<b>10 FT STICK</b> (305cm)	<b>12 FT STICK</b> (366cm)
Item No. <b>O5400-8</b> Item Size: 4" x 8' (102mm x 244cm)	Item No. <b>OS400-9</b> Item Size: 4" x 9' (102mm x 274cm)	Item No. <b>OS400-10</b> Item Size: 4" x 10' (102mm x 305cm)	Item No. <b>O\$400-12</b> Item Size: 4" x 12' (102mm x 366cm)
WHOLESALE CASE	WHOLESALE CASE	WHOLESALE CASE	WHOLESALE CASE
Case Pack: 50pc. 400 lf (122m) Case UPC: 7-51361-50265-7 Case Weight: 23.4 lbs. (10.6kg) Cases per Pallet: 32	Case Pack: 50pc. 450 lf (137m) Case UPC: 7-51361-50268-8 Case Weight: 26.5 lbs. (12kg) Cases per Pallet: 32	Case Pack: 50pc. 500 lf (152m) Case UPC: 7-51361-50270-1 Case Weight: 30 lbs (13.6kg) Cases per Pallet: 32	Case Pack: 50pc. 600 lf (183m; Case UPC: 7-51361-50284-8 Case Weight: 36 lbs. (16.3kg) Cases per Pallet: 32

# Stick Corner Beads COMPOSITE

#### **FEATURES**

Impact resistant nose for high-traffic areas where bumps and dents to corners commonly occur.

Installs square to the wall using one of Strait-Flex's specially designed rolling tool.


Beaded nose creates a perfect clean egde.

Second coat of compound can be applied immediately – very light skim coat to finish.

Provides a beautiful corner without fuzz-up during finishing and sanding.

Cuts easily.






## Strait-Flex Arch-Stick

DESIGNED FOR OUTSIDE 90° ARCHED CORNERS ELIMINATING FLAT SPOTS


33/8"w (86mm)

- Tear strips reduces transportation damage and is designed to make curved to straight transitions unnoticeable.
- Composite nose resists dents and provides a beautiful corner without fuzzup during finishing and sanding.
- Arched doors and windows.

- Curved walls, ceilings, soffits, staircases, and groin barrel ceilings.
- Free-form, custom drywall applications where a seamless installation is required.



SPECIFICATIONS	
<b>8 FT STICK</b> (244cm)	<b>10 FT STICK</b> (305cm)
Item No. <b>A5-8</b> Item Size: 3 <sup>3</sup> /8" x 8' (86mm x 244cm)	Item No. <b>A5-10</b> Item Size: 3 <sup>3</sup> / <sub>8</sub> " x 10' (86mm x 305cm)
WHOLESALE CASE	WHOLESALE CASE
Case Pack: 25 pc. 200 lf (61m) Case UPC: 7-51361-50168-1 Case Weight: 13 lbs. (9.5kg) Cases per Pallet: 32	Case Pack: 25 pc. 250 lf (76m) Case UPC: 7-51361-50172-8 Case Weight: 17 lbs. (7.7kg) Cases per Pallet: 32

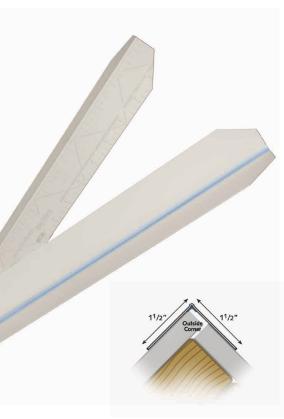


# Strait-Flex Big-Stick

DESIGNED FOR HIGH-TRAFFIC, OUTSIDE 90° CORNERS. FAST, CLEAN, STRAIGHT AND STRONG INSTALLATION

3"w (76mm)

- Vertical or horizontal outside 90° corners.
- Impact resistant nose for high traffic areas where bumps and dents to corners most commonly occur.
- Provides a beautiful corner without fuzzup during finishing and sanding.
- Spans over large gaps without shrinking.
- Easiest corner bead on the market to install.
- Second coat of compound can be applied immediately – very light skim coat to finish.

SPECIFICATIONS				
<b>8 FT STICK</b> (244cm)	<b>9 FT STICK</b> (274cm)	<b>10 FT STICK</b> (305cm)	<b>12 FT STICK</b> (366cm)	
Item No. <b>B5300-8</b> Item Size: 3 " x 8' (76mm x 244cm)	Item No. <b>B5300-9</b> Item Size: 3 " x 9' (76mm x 274cm)	Item No. <b>B5300-10</b> Item Size: 3 " x 10' (76mm x 305cm)	Item No. <b>B\$300-12</b> Item Size: 3" x 12' (76mm x 366cm)	
WHOLESALE CASE	WHOLESALE CASE	WHOLESALE CASE	WHOLESALE CASE	
Case Pack: 50pc. 400 lf (122m) Case UPC: 7-51361-50164-3 Case Weight: 24.7 lbs. (11.2kg) Cases per Pallet: 32	Case Pack: 50pc. 450 lf (137m) Case UPC: 7-51361-50181-0 Case Weight: 28 lbs. (12.7kg) Cases per Pallet: 32	Case Pack: 50pc. 500 lf (152m) Case UPC: 7-51361-50166-7 Case Weight: 34 lbs. (15.4kg) Cases per Pallet: 32	Case Pack: 50pc. 600 lf (183m Case UPC: 7-51361-50183-4 Case Weight: 43 lbs. (19.5kg) Cases per Pallet: 32	

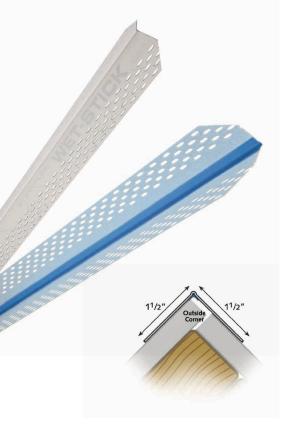

## **Strait-Flex Wet-Stick**

DESIGNED FOR OUTSIDE 90° CORNERS WITHOUT THE NEED OF COMPOUND OR FASTENERS. WATER-ACTIVATED ADHESIVE.

3"w (76mm)

- Vertical or horizontal outside 90° corners.
- High traffic areas where bumps and dents commonly occur.
- Water-activated adhesive on inside of stick.
- Impact-resistant nose.
- Small bead creates a perfect, clean edge.
- Small fill coat. Fast drying.
- Provides beautiful corner without fuzz-up during finishing and sanding.
- No delayed shrinkage.
- No edge cracking.

SPECIFICATIONS			
<b>8 FT STICK</b> (244cm)	<b>9 FT STICK</b> (274cm)	<b>10 FT STICK</b> (305cm)	<b>12 FT STICK</b> (366cm)
Item No. <b>W5-8</b> Item Size: 3 " x 8' (76mm x 244cm)	Item No. <b>W5-9</b> Item Size: 3" x 9' (76mm x 274cm)	Item No. <b>WS-10</b> Item Size: 3 " x 10' (76mm x 305cm)	Item No. <b>W5-12</b> Item Size: 3 " x 12' (76mm x 366cm)
WHOLESALE CASE	WHOLESALE CASE	WHOLESALE CASE	WHOLESALE CASE
Case Pack: 50pc. 400 lf (122m) Case UPC: 7-51361-50240-4 Case Weight: 24.7 lbs. (11.2kg) Cases per Pallet: 32	Case UPC: 7-51361-50242-8	Case Pack: 50pc. 500 lf (152m) Case UPC: 7-51361-50244-2 Case Weight: 34 lbs. (15.4kg) Cases per Pallet: 32	Case Pack: 50pc. 600 lf (183m) Case UPC: 7-51361-50246-6 Case Weight: 43 lbs. (19.5kg) Cases per Pallet: 32

## Strait-Flex Perfect-90°

FINISHES INSIDE 90° AND OFF-ANGLE CORNERS

21/16"w (52mm)




- Twice as fast and twice as strong compared to conventional paper or mesh tapes.
- Memory-free hinge produces straight inside corners and perfect angles.
- Paper will not fuzz up during sanding like paper and mesh tapes.
- Reinforced paper backing provides strength and rigidity. Spans small gaps in drywall, no back filling needed.
- Finishing compound is not required over laminated surface. Pre-treated to accept primer or paint.


CD		CAT	$\cap$	NIC

#### 100 FT ROLLS

#### WHOLESALE CASE

Item Size: 21/16" x 100' (52mm x 30.5m) Item Weight: 1.2 lbs. (.54kg) Item UPC: 7-51361-50322-7 Case Item No. **P90-100**Case Pack: 12 rolls
Case UPC: 7-51361-50323-4
Case Weight: 20 lbs. (9.1kg)
Cases per Pallet: 24
Pallet Weight: 510 lbs. (231kg)
Pallet Size: 40"x 48"x 44"






## Strait-Flex Ammo-Flex

DESIGNED FOR BAZOOKA® APPLICATIONS

21/16"w (52mm)



Inside corners of bay windows.

Straightens small framing irregularities.

- Prefinished surface. Just skim coat edges to finish.
- Inside 90° corners where small fill or straightening is required.
- NOTE: Reinforced paper backing, not paper-faced composite.



### SPECIFICATIONS

#### 100 FT ROLLS

Item Size: 21/16" x 100' (52mm x 30.5m) Item Weight: 2.5 lbs. (1.13kg) Item UPC: 7-51361-50324-1

#### WOLESALE CASE

#### Case Item No. **AMF-100** Case Pack: 12 rolls Case UPC: 7-51361-50325-8


Case Weight: 26 lbs. (11.8kg) Cases per Pallet: 24 Pallet Weight: 712 lbs. (323kg) Pallet Size: 40"x 48"x 44"


## 200 FT ROLLS

Item Size: 21/16" x 200' (52mm x 61m) Item Weight: 4.5 lbs. (2kg) Item UPC: 7-51361-50326-5

#### WHOLESALE CASE

Case Item No. AMF-200 Case Pack: 12 rolls Case UPC: 7-51361-50327-2 Case Weight: 52 lbs. (23.6kg) Cases per Pallet: 24 Pallet Weight:1003 lbs. (455kg) Pallet Size: 40"x 48"x 65"





## Strait-Flex Edge-Tape

DESIGNED TO REPLACE TEAR-OFF BEAD

2"w (51mm)



- Designed to finish drywall edges to suspended ceilings.
- Window returns, sky lights, fiberglass tubs. Commercial "Top Out" applications where drywall meets concrete ceiling/deck.
- Twice as fast and uses half the compound vs tear-off beads.
- 100 foot roll reduces waste by up to 20%; easily transported.
- Installs using standard compound. No spray adhesive or fasteners required.
- Finisher can pre-fill edge, install Edge-Tape, and fill coat in one trip to the wall.

SPECIFICATIONS		
100 FT ROLLS	WHOLESALE CASE	
Item Size: 2 " x 100' (52mm x 30.5m) Item Weight: 2.5 lbs. (1.13kg) Item UPC: 7-51361-50328-9	Case Item No. <b>ET-100</b> Case Pack: 12 rolls Case UPC: 7-51361-50329-6 Case Weight: 34lbs. (11.8kg)	SUSPENDED CEILINGS BRICK STONE


Case Weight: 34lbs. (11.8kg) Cases per Pallet: 24 Pallet Size: 40"x 48"x 44"



## Strait-Flex L-Bead

DESIGNED TO FINISH EDGES OF DRYWALL

21/4"w (57mm)




Window returns, sky lights, and wall edges.

Produced for drywall thickness of 1/2" and 5/8.State size when ordering.

NOTE: Full composite material, not paper-faced.



SPECIFICATIONS		
100 FT ROLLS	WHOLESALE CASE	SIZE CODE
Item Size: 21/4" x 100' (57mm x 30.5m) Item Weight: 3 lbs. (1.4kg) <b>LB12-100</b> Item UPC: 7-51361-50332-6 <b>LB58-100</b> Item UPC: 7-51361-50334-0	Case Pack: 12 rolls LB12-100 Case UPC: 7-51361-50333-3 LB58-100 Case UPC: 7-51361-50335-7 Case Weight: 36 lbs. (16.3kg) Cases per Pallet: 24 Pallet Weight: 894 lbs. (406kg) Pallet Size: 33"x 33"x 49"	LB12-100 1/2" LB58-100 5/8"







## Strait-Flex Tuff-Tape

DESIGNED FOR STRENGTH AND SPEED AND AS A PAPER TAPE REPLACEMENT


2"w (51mm)

- Inside corners and flat seams.
- Use in areas where humidity causes paper tape to fail and when strength and speed are required.
- Two times stronger than paper tape.
- Resists blisters, tears, and common cracking problems.

SPECIFICATIONS	5
----------------	---

#### 100 FT ROLLS WHOLESALE CASE Item Size: 2" x 100' Case Item No. TT-100 (51mm x 30.5m) Item Weight: 2.8 lbs. (1.27kg) Item UPC: 7-51361-50352-4 Cases per Pallet: 24


Case Pack: 12 rolls Case UPC: 7-51361-50353-1 Case Weight: 36 lbs. (16.3kg) Pallet Weight: 422 lbs. (191kg) Pallet Size: 30" x 30" x 46"

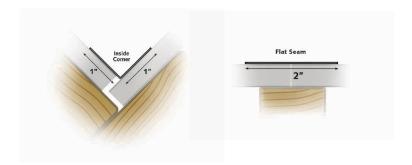

## Strait-Flex Crack-Tape

DESIGNED FOR REPAIRING PERSISTENT CRACKS

2"w (51mm)



SPECIFICATIONS **50 FT ROLLS** 

Drywall and plaster cracks, and truss uplift repairs.

Persistent cracks.

100 FT ROLLS

- Thin coat plaster applications.
- Two times stronger than paper tape.

o di ser	
STRAIT-FLEX CRACK-TAPE CRACK-TAPE  PRINCE STRAIL OF RESTREE STRANG  FRANK  FRANK	
ChilDay .	


Item Size: 2" x 50'	Case Item No. CT-50	Item Size: 2" x 100'
(51mm x 15.25m)	Case Pack: 12 rolls	(51mm x 30.5m)
Item Weight: 1.1 lbs. (.5kg)	Case UPC: 7-51361-51463-6	Item Weight: 2.1 lbs. (.9kg)
Item UPC: 7-51361-51462-9	Case Weight: 11 lbs. (5kg)	Item UPC: 7-51361-50356-
	Cases per Pallet: 24	
	Pallet Weight: 342 lbs. (155kg)	
	Pallet Size: 33" v 33" v 51"	

WHOLESALE CASE

Case Item No. **CT-100** Case Pack: 12 rolls Case UPC: 7-51361-50357-9 Case Weight: 22 lbs. (10kg) Cases per Pallet: 24 Pallet Weight: 606 lbs. (275kg) Pallet Size: 33"x 33"x 51"

WHOLESALE CASE







# Strait-Flex Tile-Tape


DESIGNED FOR TILE, MARBLE, AND GRANITE.
WATER AND MOLD-RESISTANT


21/4"w (57mm)

- Produces straight, strong, and water-proof inside, outside and off-angle corners.
- Designed for taping the water-resistant backing board for tile and marble applications.
- Prevents leaks caused by common grout cracks.
- Twice as strong than paper or mesh tapes.
- Watertight seams.

- Mold-resistant. Alkali resistant.
- Will not cut or snag with notched trowel when applying tile setting compound.
- Apply over fiber cement board, green board, mold-resistant board, or waterresistant board in wet areas (tubs, showers, tile counter tops, tub deck, and steps).

SPECIFICATIONS	
100 FT ROLLS	RETAIL CASE
Item Size: 21/4" x 100' (57mm x 30.5m) Item Weight: 1.3 lbs. (.59kg) Item UPC: 7-51361-50360-9	Case Item No. <b>T-100</b> Case Pack: 6 rolls Case UPC: 7-51361-50361-6 Case Weight: 16 lbs. (7.3kg) Cases per Pallet: 24 Pallet Weight: 414 lbs. (188kg)







## Strait-Flex Butt-Tape

DESIGNED FOR FAST, FLAT, BUTT-JOINTS

21/16"w (52mm)



■ Commercial "Top-Out" applications.

Cracked butt joints and stress cracks.

Twice as fast as conventional tapes.50% less compound. 50% less sanding.50% faster drying time.


- No pre-filling required. No delayed shrinkage. No beading. No paint blisters.
- No compound required over laminated area of tape. Just skim coat edges.
- Apprentices and professional tapers can achieve the flattest butt-joints possible. Leaves butt-joints virtually unnoticeable.
- Two times stronger than paper or mesh tape.

SPECIFICATIONS		
100 FT ROLLS	WHOLESALE CASE	
ltem Size: 21/16" x 100' (52mm x 30.5m) Item Weight: 1.2 lbs. (.54kg) Item UPC: 7-51361-50362-3	Case Item No. <b>BT-100</b> Case Pack: 12 rolls Case UPC: 7-51361-50363-0 Case Weight: 26.4 lbs. (12kg) Cases per Pallet: 24 Pallet Weight: 664 lbs. (301kg)	









## **Ultra-Patch**

## DRYWALL PATCH

Outperforms metal patches.

Quickly repairs damage to drywall.

The most economical and permanent way to repair drywall.

SPECIFICATIONS	SPECIFICATIONS		
2-PACK CARD	RETAIL CASE		
Item Size: 6" Dia. (15.2cm) Item Weight: .15 lb. (68g) Item UPC: 7-51361-50368-5	Case Item No. ULTP-2PK Case Pack: 50 Cards of 2 Case UPC: 7-51361-50369-2 Case Weight: 8 lbs. (3.6kg) Cases per Pallet: 24		
10 COUNT BAG	100 COUNT CASE		
Item Size: 6" Dia. (15.2cm) Item Weight: 1.4 lb. (725g) Item UPC: 7-51361-50370-8	Case Item No. <b>ULTP-100</b> Case Pack: 10 bags of 10 Case UPC: 7-51361-50371-5 Case Weight: 14 lbs. (6.4kg)		

## **Roll-Patches**


## CONTINUOUS PATCH MATERIAL

- Continuous roll patch allows material to be cut to any length.
- Imprinted with standard electrical outlet patterns to make repairs easy.
- Drywall damage.
- All patching applications.



SPECIFICATIONS			
<b>5.5" WIDTH (</b> 14cm) <b>20 FT ROLLS</b>	WHOLESALE CASE	5.5" WIDTH (14cm) 100 FT ROLLS	WHOLESALE CASE
Item Size: 51/2" x 20' (14cm x 6.1m) Item Weight: 1.2 lb. (.55kg) Item UPC: 7-51361-50374-6	Case Item No. <b>RP5.5x20-6</b> Case Pack: 6 rolls Case UPC: 7-51361-50375-3 Case Weight: 7 lbs. (3.2kg) Cases per Pallet: 24 Pallet Weight: 168 lbs. (76kg) Pallet Size: 32"x 32"x 55"	Item Size: 5 <sup>1</sup> /2" x 100' Item Weight: 5 lb. (2.3kg) Item UPC: 7-51361-50376-0	Case Item No. <b>RP5.5x100-4</b> Case Pack: 4 rolls Case UPC: 7-51361-50377-7 Case Weight: 20 lbs. (9.1kg) Cases per Pallet: 24 Pallet Weight: 504 lbs. (229kg) Pallet Size: 32"x 32"x 55"
11" WIDTH (28cm) 20 FT ROLLS	WHOLESALE CASE	11" WIDTH (28cm) 50 FT ROLLS	WHOLESALE CASE
Item Size: 11" x 20' (30cm x 6.1m) Item Weight: 2.2 lb. (1kg) Item UPC: 7-51361-50378-4	Case Item No. <b>RP11x20-6</b> Case Pack: 6 rolls Case UPC: 7-51361-50379-1 Case Weight: 13.5 lbs. (6.1kg) Cases per Pallet: 24 Pallet Weight: 328 lbs. (149kg) Pallet Size: 33"x 33"x 52"	Item Size: 11" x 50' Item Weight: 5 lb. (2.3kg) Item UPC: 7-51361-50380-7	Case Item No. <b>RP11x50-1</b> Case Pack: 1 roll Case UPC: 7-51361-50381-4 Case Weight: 5 lbs. (2.3kg) Pallet Size: 33"x 33"x 52"





## Perma-Patch

### MULTI-PURPOSE DRYWALL PATCH

- Outperforms metal patches.
- Quickly repairs door knob damage to drywall.
- Makes easy repairs to receptacles, ceiling and can lights, and miscuts.
- Imprinted with can light and standard receptacle patterns for easy trimming.
- The most economical and permanent way to repair drywall.

SPECIFICATIONS	SPECIFICATIONS				
2-PACK CARD	RETAIL CASE				
Item Size: 8" x 8" (20.3cm x 20.3cm) Item Weight: .2 lb. (91g) Item UPC: 7-51361-50382-1	Case Item No. PP-2PK Case Pack: 50 Cards of 2 Case UPC: 7-51361-50383-8 Case Weight: 9.5 lbs. (4.3kg) Cases per Pallet: 24 Pallet Weight: 252 lbs. (114kg) Pallet Size: 30"x 30"x 24"				
10 COUNT BAG	100 COUNT CASE	500 COUNT CASE			
ltem Size: 8" x 8" (20.3cm x 20.3cm) Item Weight: .5 lb. (226g) Item UPC: 7-51361-50384-5	Case Item No. <b>PP-100</b> Case Pack: 10 bags of 10 Case UPC: 7-51361-50385-2 Case Weight: 6.2 lbs. (2.8kg) Cases per Pallet: 24 Pallet Weight: 173 lbs. (78kg) Pallet Size: 30"x 30"x 24"	Case Item No. <b>PP-500</b> Case Pack: 50 bags of 10 Case UPC: 7-51361-50387-6 Case Weight: 27.3 lbs. (12.4kg) Cases per Pallet: 24 Pallet Weight: 200 lbs. (91kg) Pallet Size: 33"x 33"x 45"			




Pre-cut to fit standard receptacle boxes.

Repairs and reinforces mis-cut or damaged areas around receptacle box.

■ Very fast, extremely strong.





SPECIFICATIONS				
2-PACK CARD	RETAIL CASE			
Item Size: 43/4" x 61/4" (12cm x 16cm) Item Weight: .2 lb. (91g) Item UPC: 7-51361-50387-6	Case Item No. OP-2PK Case Pack: 50 Cards of 2 Case UPC: 7-51361-50389-0 Case Weight: 4 lbs. (1.8kg) Cases per Pallet: 24 Pallet Weight: 126 lbs. (57kg)			
10 COUNT BAG	100 COUNT CASE	500 COUNT CASE		
Item Size: 43/4" x 61/4" (12cm x 16cm) Item Weight: .4 lb. (182g) Item UPC: 7-51361-50390-6	Case Item No. <b>OP-100</b> Case Pack: 10 bags of 10 Case UPC: 7-51361-50392-0 Case Weight: 2 lbs. (.9kg) Cases per Pallet: 24 Pallet Weight: 74 lbs. (33.6kg)	Case Item No. <b>OP-500</b> Case Pack: 50 bags of 10 Case UPC: 7-51361-50394-4 Case Weight: 9.2 lbs. (4.2kg) Cases per Pallet: 24 Pallet Weight: 250 lbs. (113kg)		



## **Head-Patch**

### SPRINKLER HEAD PATCH, STANDARD AND FLUSH STYLE

- Pre-cut to fit standard sprinkler head safety caps.
- Repairs and reinforces mis-cut or damaged areas around sprinkler head holes.
- Install in areas where patching cutouts were made too large.
- Sprinkler head replacement patch.

SPECIFICATIONS	
10 COUNT BAG	100 COUNT CASE
Item Size: 5" 21/4" Dia. Hole (13cm, 57mm Dia. Hole) Item Weight: .4 lb. (.18kg) Item UPC: 7-51361-50395-1	Case Item No. <b>HP-100</b> Case Pack: 10 bags of 10 Case UPC: 7-51361-50396-8 Case Weight: 1.7 lbs. (.77kg) Cases per Pallet: 24 Pallet Weight: 67 lbs. (30.3kg) Pallet Size: 30"x 30"x 18"









## **Black-Iron Patch**

### SPRINKLER PIPE PATCH

- Pre-cut to fit standard sprinkler pipes.
- Repairs and reinforces mis-cut or damaged areas around sprinkler pipe holes.
- Install in areas where patching cutouts were made too large.
- Sprinkler pipe relocation.

SPECIFICATIONS	
20 COUNT BAG	100 COUNT CASE
Item Size: 41/2" 13/8" Dia. Hole (11.4cm, 35mm Dia. Hole) Item Weight: .4 lb. (.18kg) Item UPC: 7-51361-50399-9	Case Item No. BP-100 Case Pack: 5 bags of 20 Case UPC: 7-51361-50400-2 Case Weight: 1.5 lbs. (.68kg) Cases per Pallet: 24 Pallet Weight: 60 lbs. (27kg) Pallet Size: 30"x 30"x 18"

## Pipe-Patch


### COPPER PIPE PATCH

- Pre-cut to fit 1/2" and 3/4" copper pipes. (13mm and 19mm)
- Great for fire taping.

Pipe-Patch repairs and reinforces mis-cut drywall.

SPECIFICATIONS	
<b>1/2" DIA. PATCH</b> (13mm)	100 COUNT CASE "
Item Pack: 10 patches Item Size: 27/8" 1/2" Dia. Hole (73mm, 13mm Dia. Hole) Item Weight: 1.1 lb. (.5kg) Item UPC: 7-51361-50403-3	Case Item No. PIP50-100 Case Pack: 10 bags of 10 Case UPC: 7-51361-50404-0 Case Weight: 4.1 lbs. (1.9kg) Cases per Pallet: 24
<b>3/4" DIA. PATCH</b> (19mm)	100 COUNT CASE
Item Pack: 10 patches Item Size: 27/8" 3/4" Dia. Hole (73mm, 19mm Dia. Hole) Item Weight: 1 lb. (.45kg) Item UPC: 7-51361-50406-4	Case Item No. PIP75-100 Case Pack: 10 bags of 10 Case UPC: 7-51361-50408-8 Case Weight: 4.1 lbs. (1.9kg) Cases per Pallet: 24

## STRAIT-FLEX®




## Can-Patch

### CAN LIGHT PATCH (RESIDENTIAL)

- Pre-cut to fit standard residential ceiling lights.
- Repairs and reinforces mis-cut or damaged areas around ceiling lights and can light holes.
- Install in areas where patching cutouts were made too large.
- Ceiling lights and can light relocation.

SPECIFICATIONS	
10 COUNT BAG	100 COUNT CASE
Item Size: 8" x 8" 61/4" Dia. Hole (20.3cm x 20.3cm) 159mm Dia. Hole Item Weight: .4 lb. (.18kg) Item UPC: 7-51361-50411-8	Case Item No. <b>CPR-100</b> Case Pack: 10 bags of 10 Case UPC: 7-51361-50412-5 Case Weight: 3 lbs. (1.36kg)



## Can-Patch


### CAN LIGHT PATCH (COMMERCIAL)

- Pre-cut to fit standard commercial ceiling lights.
- Repairs and reinforces mis-cut or damaged areas around ceiling lights and can light holes.
- Install in areas where patching cutouts were made too large.
- Ceiling lights and can light relocation.

SPECIFICATIONS	
10 COUNT BAG	100 COUNT CASE
Item Size: 11" 8" Dia. Hole (28cm, 20.3cm Dia. Hole) Item Weight: .5 lb. (.23kg) Item UPC: 7-51361-50415-6	Case Item No. <b>CPC-100</b> Case Pack: 10 bags of 10 Case UPC: 7-51361-50416-3 Case Weight: 5 lbs. (2.27kg)

## **Deck-Patch**

#### CORRUGATED ROOF DECK PATCH

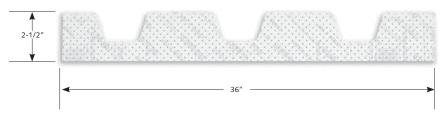

- Custom manufactured to match the contours of different decking.
- Made in three foot sections for easy handling.
- ☐ Great as a template for cutting drywall to fit the corrugated decking.
- Perforated PVC fiber composite material.

#### SPECIFICATIONS

Item No. **DP36-34**Item Size: 21/2"x 36"
(63mm x 91cm)
Case Pack: 34 Patches, 102 LF
Case UPC: 7-51361-50420-0
Cases per Pallet: 24
Pallet Weight: 72 lbs (32 7kp)

Pallet Weight: 72 lbs. (32.7kg)
Pallet Size: 30"x 30"x 10"

State corrugated roof deck manufacturer when ordering.



# IIIuu P Mud-Pro<sup>2</sup> **FEATURES** The fastest, cleanest, and most durable compound applicator on the market. Designed to apply precise amounts of compound to inside and outside 90° corner beads, flex tapes, and outside bullnose and chamfer corner beads. Mix and store compound in same bucket. Five gallon compound capacity. No daily clean-up. Just fold legs; drop into 6" of water. Stainless steel construction for long-life. Includes Mud-Pro<sup>2</sup> mounted to bucket, and second bucket.



## Mud-Pro<sup>2</sup>

COMPOUND APPLICATOR

## SPECIFICATIONS

Item No. MP2 Case Pack: 1

Item Weight: 14 lb. (6.35kg)

Item UPC: 7-51361-50421-7

Contact Customer Service with service questions or parts.









# **Inside Rolling Tools**

Speeds application time.

For use with all inside corner products (excl. Wide-Flex)

Squares up corner beads on walls.

Attaches to common extension poles.

#### SPECIFICATIONS

#### **INSIDE ROLLING TOOL**

Item No. **ISR** Item Size: 8"x 1<sup>7</sup>/8"x 1<sup>7</sup>/8" Case Pack: 1 Case Weight: 1.2 lb. Item UPC: 7-51361-50423-1

# **Outside Rolling Tools**

Speeds application time.

For use with all outside corner products.

Squares up corner beads on walls.

Attaches to common extension poles.

SPECIFICATIONS		
ORIGINAL OUTSIDE TOOL	BSR-300 TOOL	OSR-300 TOOL
Item No. <b>OSR</b> Case Pack: 1 Case Weight: 1.2 lb. Item UPC: 7-51361-50425-5	Item No. <b>BSR300</b> Case Pack: 1 Case Weight: 1.2 lb. Item UPC: 7-51361-50427-9	Item No. <b>OSR300</b> Case Pack: 1 Case Weight: 1.2 lb. Item UPC: 7-51361-50429-3
OSR-400 TOOL	WET-STICK TOOL	
Item No. <b>OSR400</b> Case Pack: 1 Case Weight: 1.2 lb. Item UPC: 7-51361-50431-6	Item No. WSR Case Pack: 1 Case Weight: 1.2 lb. Item UPC: 7-51361-50433-0	











## **Super-Bond**

## DRYWALL COMPOUND ADDITIVE

- Ensures maximum bonding of tapes to painted surfaces, drywall, and plaster.
- Excellent additive to all-purpose compound when applying compound over painted surfaces.
- Add one bottle Super-Bond (16 oz.) to five gallon bucket of drywall compound. For individual taping pans, add one oz. Super-Bond per 12" taping pan.
- Compatible with all drywall compounds.

SPECIFICATIONS							
SUPER-BOND	RETAIL CASE						
Item Size: 16 fl oz. (.47l) Item UPC: 7-51361-50435-4	Case Item No. <b>SB-12</b> Case Pack: 12 Case UPC: 7-51361-50436-1 Case Weight: 16 lbs. (7.3kg)						



## **Drywall Shims**

- Floating butt-joints and framing irregularities.
- Uses include door jambs, hanging cabinets, countertops, windows, and pre-fabricated shower stall inserts.
- Easy dispensing carton.

- Shims save time by shimming drywall to allow greater inset at joints.
- Shims improves quality as it assists in providing a level surface for better fits.

### SPECIFICATIONS

## 45" LENGTH SHIMS (114cm)

Item No. **D5-100** Item Size: 11/2"x 45" x 1/16" (38mm x 114cm x 1.5mm) Case Pack: 100 Case UPC: 7-51361-50438-5 Case Weight: 8.6 lbs. (3.9kg) Cases per Pallet: 100

DRYWALL COMPOUND







## **Multi-Purpose Sprayer**

DESIGNED FOR EVEN SATURATION OF WET-STICK AND WET-FLEX

Easy spray, pump activated bottle, adjustable nozzle, thumb trigger. ■ 48 fl. oz capacity.

SPECIFICATIONS	
SPRAYER	RETAIL CASE
Item Size: 48 fl oz" (20cm) Item Weight: .8 lbs. (.36kg) Item UPC: 7-51361-50439-2	Case Item No. <b>MPS-6</b> Case Pack: 6 Case UPC: 7-51361-50440-8 Case Weight: 5.5 lbs. (2.5kg)

## **Extension Pole**

FIBERGLASS AND ALUMINUM POLE



- Telescopic extension pole for painters, drywall contractors, and moving companies.
- Five locking adjustment sizes.
- Comfort grip.
- Adjusts sizes from 3' (91cm) to 5' (152cm) at 6" (15cm) intervals.

#### SPECIFICATIONS

Item No. **EP** Item Weight: 1.5 lb. (.68kg) Item UPC: 7-51361-50442-2




## Flex-Folder

HAND-HELD TAPE FOLDER

Speeds the folding of all Strait-Flex flexible composite corner beads to correct installation angles.

Weakens inside hinge to help make angle adjustments.



#### SPECIFICATIONS

FLEX-FOLDER	RETAIL CASE

Item Size: 37/16" x 33/8" x 3/8" (87mm x 86mm x 10mm) Item Weight: 1.1 lb. (.5kg) Item UPC: 7-51361-50443-9

Case Item No. **FF-12**Case Pack: 12
Case UPC: 7-51361-50444-6
Case Weight: 5.25 lbs. (2.4kg)



## **Scissors**

## DESIGNED TO CUT TIME AND TAPE

Heavy-duty, stainless steel, softgrip scissors, bent design.

Cuts tapes and composite corner beads easily

## SPECIFICATIONS

SCISSORS	RETAIL CASE
Item Size: 8" (20cm) Item Weight: .3 lbs. (.14kg) Item UPC: 7-51361-50312-8	Case Item No. <b>SK-12</b> Case Pack: 12 Case UPC: 7-51361-50313-5 Case Weight: 4.25 lbs. (1.93kg)



**NO CRACKS** X-Crack® eliminates all cracks in vaulted ceilings, butterfly vaults, and inside 90-degree corners in flat ceiling areas caused by truss uplifts. This patented product holds drywall joints stationary while allowing structural movement of framing members.

**STRAIGHTENS** X-Crack's rigid design, hinged backbone, and flexible tab design will straighten all uneven framing members. This pre-straightening of sub-structure will eliminate the need of all pre-filling due to irregularities of framing members. It makes easy work of intricate ceiling applications that have no backing.

**FAST** X-Crack is adjustable to any inside or outside angle and installs in minutes. X-Crack will reduce finishing time by the elimination of pre-filling and pre-straightening. Your drywall finisher will start with a perfectly even and straight joint.

**PERMANENT** Follow the installation instructions and you will solve the age-old problem of ceiling cracks and uneven framing!

**DESCRIPTION** X-Crack is a patented, floating alignment joint member manufactured from 24 mil G90 galvanized steel and is available at your local drywall distributor in ten feet length rolls. Each X-Crack carton contains ten 10' rolls (100 lineal ft).







### **ADVANTAGES**

Eliminates inside and outside cracks in ceiling corner joints.

Eliminates costly repairs due to ceiling cracks and the inconvenience to dissatisfied home owners.

Eliminates pre-filling or pre-straightening by finisher when ceiling members are not in alignment.

Quick installation time - 50 feet of X-Crack takes about 10 minutes to install.

Perfectly straight inside and outside ceiling corners.

Makes easy work of complex, intricate ceiling applications that have no backing or uneven framing.

Eliminates wood backing in vaulted areas.

Provides straight continuous backing for fastening in tee-pee ceilings and butterfly vaults.

The time saved by the drywall finisher pays for the material costs many times over.

Combined use of X-Crack and Strait-Flex Gold or Mid-Flex flexible corner trim results in permanent protection against cracks.

## Strait-Flex X-Crack

#### FRAMING ALIGNMENT

- Eliminates ceiling cracks and straightens uneven framing.
- Drywall ceiling areas that use wood roof trusses or conventional wood framing members.
- Intricate ceiling applications, such as tee-pee ceilings in octagon rooms and butterfly vaults.
- Areas where framing members are out of alignment.
- Ceiling areas where drywall is not properly supported.
- Ceiling areas where movement may occur.
- Stainless steel construction for long-life.

#### SPECIFICATIONS

Item No. **X-R**Item Size: 41/4" x 10'
(10.8cm x 305cm)
Case Pack: 10 pc. 10 ft long, 100 lf (30.5m)
Case UPC: 7-51361-50367-8
Case Weight: 21 lbs. (9.5kg)
Cases per Pallet: 24 or 48
Pallet Weight: 544 lbs. 1048 lbs.
(247kg, 475kg)

#### Installation Requirements to Eliminate Potential For Cracks


Adjust X-Crack to desired angle and use drywall screws to fasten it to ceiling framing members. Install drywall over X-Crack using fine or coarse threaded screws – be sure screws only penetrate drywall and X-Crack but miss trusses or ceiling joists by 2 to 4 inches. You must install the last screws in the field 10 to 12 inches away from X-Crack to allow for lumber movement. By missing the framing members and fastening drywall boards only to X-Crack; finished inside corners will not move or crack. Use Strait-Flex **Gold** or **Mid-Flex** flexible corner trim to complete installation.

NO SCREW SHOULD PENETRATE ALL THREE MATERIALS (drywall - X-Crack - framing members)



U.S. Patent No. 9,222,266



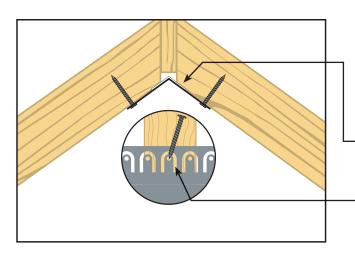


#### **Installation Instructions**

Fasten X-Crack to ceiling trusses or conventional framing members before drywall installation.

#### **Directions for Use**

- 1 Adjust X-Crack to angle of corner. For inside corners, surface of PVC hinge faces framing members. For outside corners, surface of PVC hinge faces out.
- Using drywall screws, first fasten X-Crack at end of lengths.
   Align center and fasten to framing members. Overlap X-Crack approximately one inch at joints.
- **3** Let X-Crack float over irregular framing members to create a straight line. Six screws per length is all that is required to hold X-Crack in place. The last screws in the field secures drywall to ceiling and the screws through drywall into body of X-Crack secures inside corners.



The last screw in the field should be 10 to 12 inches away from X-Crack. This allows ceiling members to move independently of drywall joint.

5 Use Strait-Flex Gold or Mid-Flex flexible corner bead to finish the application.




SCREWS THAT SECURE X-CRACK TO CEILING MEMBER Penetrates: X-Crack, Framing Member



SCREWS THAT SECURE DRYWALL TO X-CRACK Penetrates: Drywall , X-Crack



LAST SCREWS IN FIELD Penetrates: Drywall, Framing Member



16"or 24"OC

10"-12"

PPAAAA

**DRYWALL** 

nnnnnn

X-Crack's patented hinge and flexible tab design holds drywall joints stationary while structural framing members are allowed to move independently of the drywall. Causes for this movement may be due to lumber shrinkage, snow or wind loads, and truss uplift.

## DO'S

Keep a bucket of water nearby for mixing and tool clean up.

Use all-purpose compound for bed coat and coating screws.

Add water and mix compound thoroughly to a smooth creamy texture.

Keep the inner side walls of the compound bucket clean and smooth with a wet sponge. Hardened compound on the sides of the bucket could fall into the smooth compound and will streak when applied to the drywall surface.

Set all screws below the surface of the drywall. Check with a taping knife as the knife will snag on screws not set deep enough.

Use a brush to wipe away any dust before applying compound.

For outside corners, use a drywall rasp to remove any drywall edges that extend over the adjacent drywall surface.

Use the correct product for the job. The better the framing and hanging; the smaller the product. The larger the gaps, the worse the framing; the larger the product.

(Composite flexible corner beads) Always fold print side together. Fold tighter for outside corners and more open for inside corners. This ensures the product lays flat on the wall.

(Paper-faced flexible corner trims) Print side faces out for both inside and outside corners.

Trim the ends of corner beads and trims at a 45° angle. This will keep them flat on wall.

(Patches) Apply compound to the <u>back</u> of all patches, flip over, and apply patch to the damaged area. Strait-Flex patches become rigid because of compound on back of patch.

Use 150-200 grit sandpaper when finish coat is lightweight compound (softer compound). Use 100-150 grit sandpaper when finish coat is all-purpose compound (harder compound).

#### DONT'S

Use light-weight finishing compound for bed coats. Light-weight compounds don't have the strength of taping compounds.

Dilute compound with too much water.

Use the wrong size product for the job.

Overlap tapes or corner beads.

Please call ClarkDietrich with any product questions or concerns.
1-888-747-0220



	THE RIGHT PRODUCT THE RIGHT APPLICATI	ON		/	/	vall		//	/,	/,	/,	/,	/,	/	/ .		. /	Orne	Bea	, ,	. /.	ite Latina
	rolled products	aro	duct Total W	of Filled	in Dry	wall of Cor	ners Sond	aults S	s sams Bi	stt.Join	s adds w	let Area	s o	o Cort	ners of Curve	South &	518 9	netal Co	Mold.P	esistant kull on	hoosite Papertal	ed Composite Landse Lan
Tuff-Tape	Use where paper tapes has failed	2"	Small																			
Crack-Tape	Persistent cracks	2"	Reg		1			/		/				/					/	,		
Edge-Tape	Finishes edges of drywall	2"	Reg																	/		
Perfect-90°	Faster and stronger than paper tape	2 <sup>1</sup> /16"	Small		/	1															/	
Ammo-Flex	Bazooka® applications	2 <sup>1</sup> /16"	Small		1	1															~	
Butt-Tape	Fast, flat butt-joints	2 <sup>1</sup> /16"	Small					/	1												•	
Medium	Inside corners and off-angle corners	21/4"	Small		1	1													/			
Tile-Tape	Wet areas, Mold-proof	21/4"	Reg	/	/	1		/			/							<b>/</b>	/	1		
Uno-Bead <sup>222</sup>	Drywall, plaster	21/4"	Reg	/	/	1								/		/	/		/			
L-Bead	Finishes edges of drywall	21/4"	Reg																/	1		
Original	Most versatile, multi-purpose	23/8"	Reg	/	1	1													/			
Gold	Inside & outside 90° and off-angle corners	21/2"	Reg	/	/	1	/													/		
Mid-Flex	Inside & outside 90° and off-angle cornerss	3"	Reg	/	/	1	/													/		
Wet-Flex	Outside corners, vaults, water activated	3"	Large	/		1													/	,		
Arch-Flex	Compound arches, double curves applications	3 <sup>3</sup> /8"	Reg									/	/						/	,		
Wide-Flex	Inside & outside 90° and off-angle corners	4"	Large	/	/	~	/								/					/		

	stick products	Pro	duct Total with	dith Out	Drynall Or	3/36	oners	Butt-Joi	itadks v	Jet Are?	ss o	0/10	S June's Leer Plaster	5/8/99	netal Cor	s dead seed the Ares	sistari Sistari	aget to	ed composite surfaced celli	ose Lamin's	ķe/
IS-300	Inside 90°, straightens large irregularities	3"	Large		/												/				
Big-Stick	Outside 90°, straightens common irregularities	3"	Reg	<b>/</b>										/	'	<b>/</b>					
Wet-Stick	Outside 90°, water-activted	3"	Reg	/										/	'	/					
OS-300	Outside 90°, straightens common irregularities	3"	Reg	<b>/</b>													<b>/</b>				
Arch-Stick	Outside 90° arched corners	3 <sup>3</sup> /8"	Reg	/						/	/					/					
OS-400	Outside 90°, straightens large irregularities	4"	Large	/													/				



3851 Corporate Centre Drive O'Fallon, MO 63368

Phone: 636-300-1411 Fax: 636-300-0414

For more information, call toll-free 1-888-747-0220 or visit www.clarkdietrich.com

SF-PROD-CAT © 11/22 CLARKWESTERN DIETRICH BUILDING SYSTEMS, LLC